BAND BLADER OPAL L

view

RAL

size

1 overall dimensions

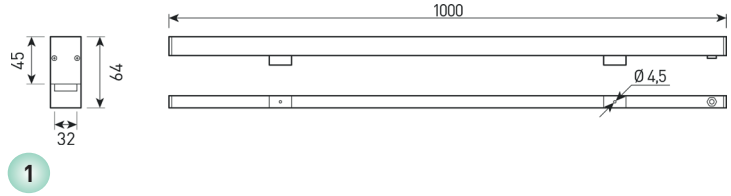

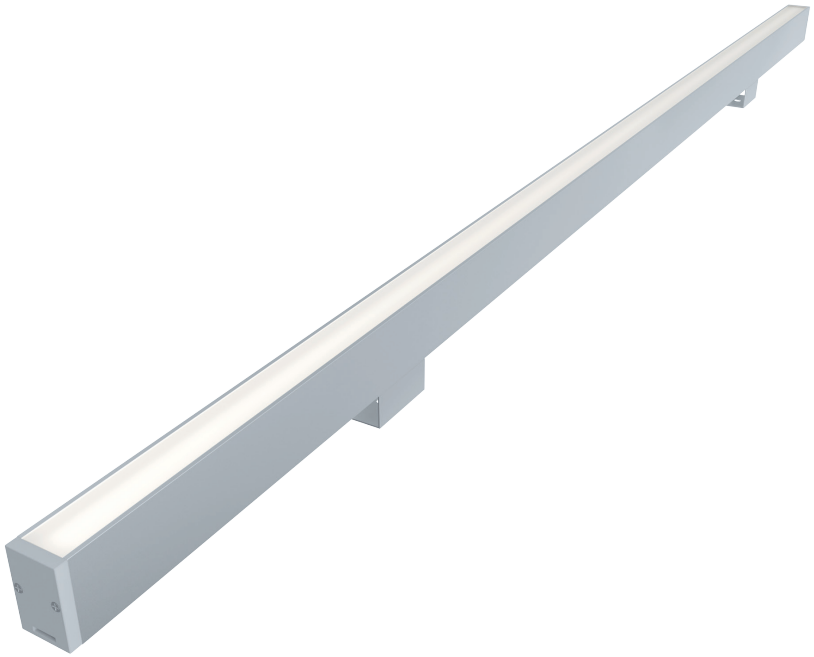

https://img-lighting.com/

BAND BLADER OPAL L

Ultra-thin linear luminaire for architectural lighting.

Housing:	Extruded aluminum with a protective anti-corrosion coating
Housing color:	Metallic, RAL
Beam angle:	120°
IES protection classes:	Class I (SELV)
Color temperature, K:	2700K, 3000K, 4000K, 5000K, 6000K, R, G, B, RGB 3in1, RGBW 4in1
Input voltage, V:	24V
Control system:	On/Off, DMX-512
Ingress Protection Rating, IP:	IP66
Operating temperature:	-40°C ~ +50°C
Weight:	0,3-0,6kg

Article	Name	Power, W	Dimensions, mm	Input voltage, V	Beam angle, degrees	Color temperature, K	Weight, kg
774014040	BAND BLADER OPAL L 4W 300mm 24V SINGLE COLOR on/off IP66	5W	300x32x45	24V	120°	2700K, 3000K, 4000K, 5000K, 6000K, R, G, B	0,4
774014042	BAND BLADER OPAL L 4W 300mm 24V DMX RGB 3in1 IP66	4W	300x32x45	24V	120°	RGB	0,4
774014044	BAND BLADER OPAL L 5W 300mm 24V DMX RGBW 4in1 IP66	5W	300x32x45	24V	120°	RGBW	0,4
774014046	BAND BLADER OPAL L 6W 500mm 24V SINGLE COLOR on/off IP66	6W	500x32x45	24V	120°	2700K, 3000K, 4000K, 5000K, 6000K, R, G, B	0,5
774014047	BAND BLADER OPAL L 6W 500mm 24V DMX SINGLE COLOR 4 segm IP66	6W	500x32x45	24V	120°	2700K, 3000K, 4000K, 5000K, 6000K, R, G, B	0,5
774014048	BAND BLADER OPAL L 6W 500mm 24V DMX RGB 3in1 4segm IP66	6W	500x32x45	24V	120°	RGB	0,5
774014050	BAND BLADER OPAL L 7W 500mm 24V DMX RGBW 4in1 4segm IP66	7W	500x32x45	24V	120°	RGBW	0,5
774014052	BAND BLADER OPAL L 12W 1000mm 24V SINGLE COLOR on/off IP66	12W	1000x32x45	24V	120°	2700K, 3000K, 4000K, 5000K, 6000K, R, G, B	0,6
774014053	BAND BLADER OPAL L 12W 1000mm 24V DMX SINGLE COLOR 8 segm IP66	12W	1000x32x45	24V	120°	2700K, 3000K, 4000K, 5000K, 6000K, R, G, B	0,6
774014054	BAND BLADER OPAL L 12W 1000mm 24V DMX RGB 3in1 8segm IP66	12W	1000x32x45	24V	120°	RGB	0,6
774014056	BAND BLADER OPAL L 14W 1000mm 24V DMX RGBW 4in1 8segm IP66	14W	1000x32x45	24V	120°	RGBW	0,6