



view



1 overall dimensions

size

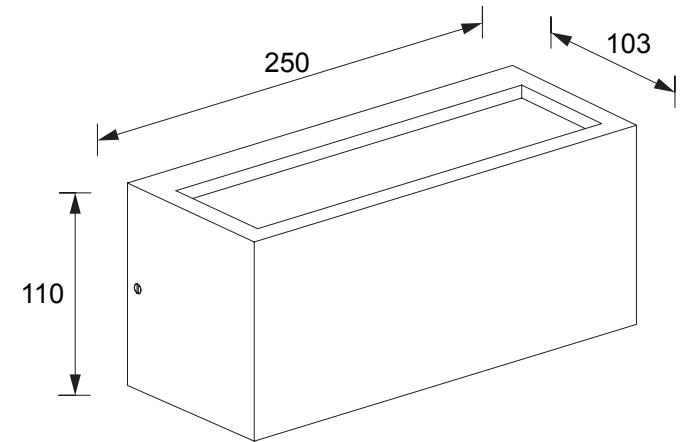

1



DISMA S

LED outdoor wall-mounted lighting 12W, IP65.

The luminaire has an ergonomic and convenient design, and is suitable for accentual lighting.

Suitable for use as outdoor lighting. The driver and the power supply are located inside the housing.

| | |
|---|--|
| Housing: | Pressure die-cast aluminum alloy with polyester powder paint. Body and glass are fitted with silicone sealants. |
| Fasteners: | Stainless steel, T=2.00mm |
| Glass: | tempered glass, 3.0 mm |
| Optical system: | Optical lens. Efficiency >85% |
| Optics with angles: | 61° |
| Housing color: | Black, Grey, White |
| Operating temperature: | -40°C – +45°C (at startup: -20°C) |
| Weight: | 2 kg |
| Number of diodes (monochromatic) | 16X1W |

| Article | Name | Power, W | Dimensions, mm | Beam angle° | Light flow, lm | Color rendering index | Power factor (PF) |
|----------|-----------------------------|----------|-----------------|-------------|----------------|-----------------------|-------------------|
| 69506510 | Disma S 12W 3000K 220V IP65 | 12 W | 250 x 103 x 110 | 61° | 193 lm | 84 | 0,93 |