


ECLIPSE-G 220\750



view




- 1 ECLIPSE-G 220
- 2 ECLIPSE-G 750




size

1



2

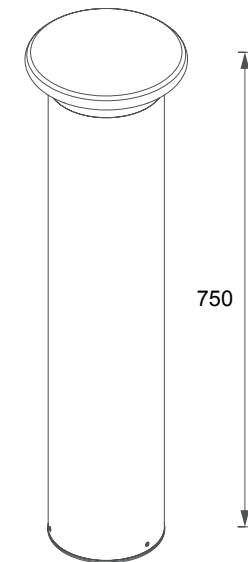

ECLIPCE-G 220\750

LED outdoor wall-mounted lighting 10W, IP65.

The luminaire has an ergonomic and convenient design, and is suitable for accentual lighting.

Suitable for use as outdoor lighting. The driver and the power supply are located inside the housing.

Housing:	Pressure die-cast aluminum alloy with polyester powder paint. Body and glass are fitted with silicone sealants.
Fasteners:	Stainless steel, T=2.00mm
Glass:	tempered glass, 3.0 mm
Optical system:	Optical lens. Efficiency >85%
Optics with angles:	53°
Housing color:	Black, Grey, White
Operating temperature:	-40°C – +45°C (at startup: -20°C)
Weight:	1.38 kg
Number of diodes (monochromatic)	10X1W

Article	Name	Power, W	Dimensions, mm	Beam angle°	Light flow, lm	Color rendering index	Power factor (PF)
69503040	Eclipse-G 220 10W 3000K 220V IP65	10 W	210 x 220	53°	253 lm	80	0,92
69503050	Eclipse-G 750 10W 3000K 220V IP65	10 W	210 x 750	53°	253 lm	80	0,92