


view

RAL



size

1 overall dimensions

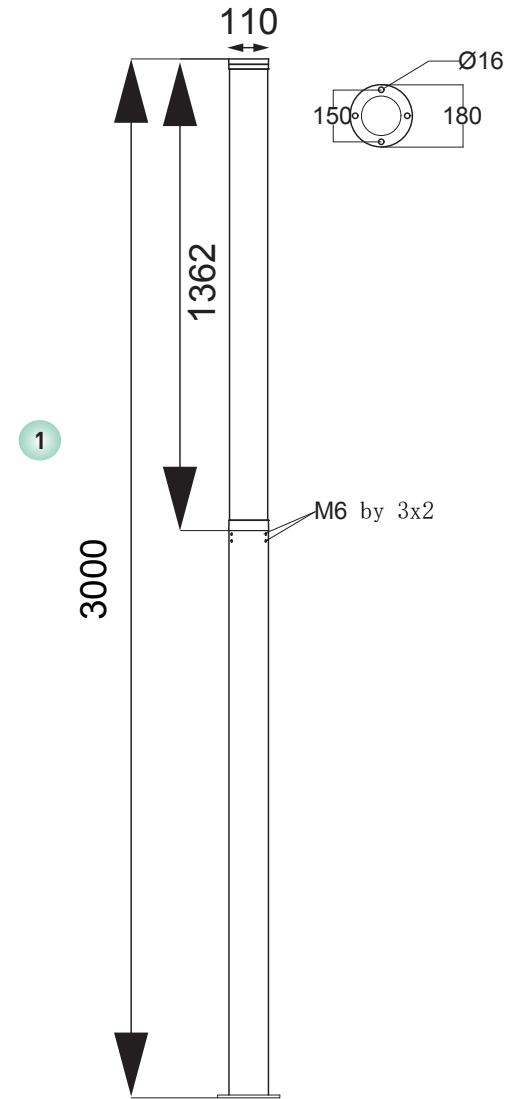

LOGIC

The series of light intended for landscape lighting, shopping centres and business-centres.

Housing:	Pressure die-cast aluminum alloy with polyester powder paint.
Beam angle:	diffused light
Housing color:	RAL
Color temperature, K:	2700K - 6500K, RGB
Color rendering index, CRI:	>70
Control system:	Switch On\Off, DMX-512, RDM
Input voltage, V:	220V
Ingress Protection Rating, IP:	IP65
Operating temperature:	-40°C to +45°C
Guaranteed lifetime, hours:	>35 000h

Article	Name	Power, W	Dimensions, mm	Input voltage, V	Beam angle, degrees	Color Temperature, K	Weight, kg
692040020	LOGIC 110 40W 2700K 220V IP65	40W	d110x3000	220V	diffused light	2700K	10.3kg
692040030	LOGIC 110 40W 3000K 220V IP65	40W	d110x3000	220V	diffused light	3000K	10.3kg
692040040	LOGIC 110 40W 4000K 220V IP65	40W	d110x3000	220V	diffused light	4000K	10.3kg
692040050	LOGIC 110 40W 5000K 220V IP65	40W	d110x3000	220V	diffused light	5000K	10.3kg
692040060	LOGIC 110 40W 6500K 220V IP65	40W	d110x3000	220V	diffused light	6500K	10.3kg
692020070	LOGIC 110 20W RGB 220V IP65	20W	d110x3000	220V	diffused light	RGB	10.3kg