



view



size

1 overall dimensions

1

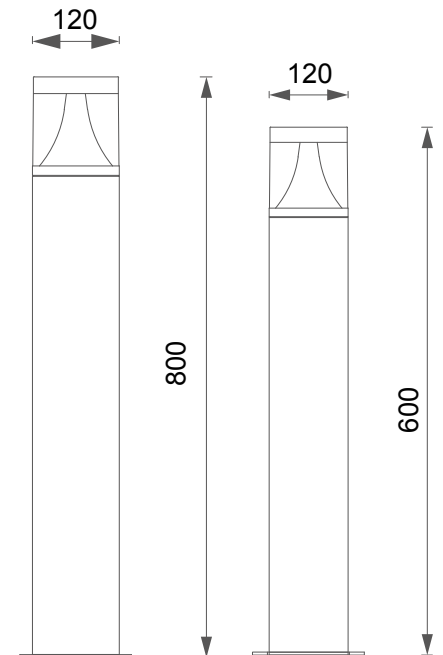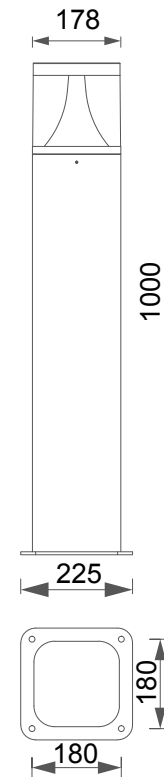

NOLAN

LED outdoor lighting 15W and 30W, IP65.

Landscape quadrangular bollard with four rounded edges. Driver and power supply are inside the housing well protected from environment dust and wet. Models have different height. A stable clamping to the ground is possible with the help of collar.

Housing:	Pressure die-cast aluminum alloy with polyester powder paint. Body and glass are fitted with silicone sealants.
Fasteners:	Stainless steel, T=2.00mm
Glass:	Tempered glass, 3.0mm
Beam angle:	140°
Housing color:	Black, Silver
Color temperature, K:	4000K
Color rendering index, CRI:	>75
Power Factor:	>0.9
IK:	>0.8
Control system:	Switch On\Off
Input voltage, V:	220V
Ingress Protection Rating, IP:	IP65
Operating temperature:	-40°C to +45°C (at startup: -20°C)

Article	Name	Power, W	Dimensions, mm	Input voltage, V	Beam angle, degrees	Color Temperature, K	Weight, kg
70001560	NOLAN 15W 600mm IP65	15W	120x600	220V	140°	4000K	3,3kg
70001580	NOLAN 15W 800mm IP65	15W	120x800	220V	140°	4000K	3,8kg
70003010	NOLAN 30W 1000mm IP65	30w	178x1000	220V	140°	4000K	8.5kg