

RUNDEL ROUND-C



view




1 overall dimensions



1

size

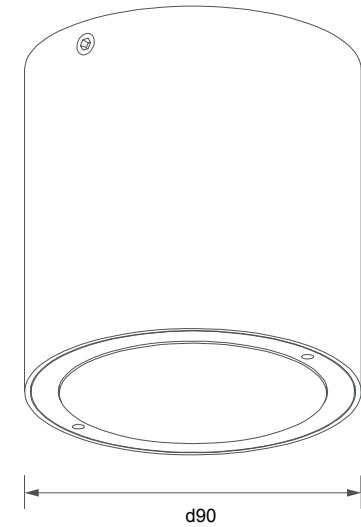

d90

RUNDEL ROUND-C

LED outdoor ceiling-wall lighting 7W, IP65.

The luminaire has an interesting and recognizable design, but also is a compact and convenient solution for floodlighting and accentual lighting of entry elements. Suitable for use as outdoor lighting instead of devices with gas-discharge lamps. The driver and the power supply are located inside the housing.

Housing:	Pressure die-cast aluminum alloy with polyester powder paint. Body and glass are fitted with silicone sealants.
Fasteners:	Stainless steel, T=2.00mm
Glass:	tempered glass, 3.0 mm
Optical system:	Optical lens. Efficiency >85%
Optics with angles:	19°
Housing color:	Black, Grey, White
Operating temperature:	-40°C – +45°C (at startup: -20°C)
Weight:	1.22 kg
Number of diodes (monochromatic)	1X7W

Article	Name	Power, W	Dimensions, mm	Beam angle°	Light flow, lm	Color rendering index	Power factor (PF)
69507070	Rundel Round-C COB 7W 3000K 220V IP65	7 W	90 x 95	19°	373 lm	82	0,53
69507080	Rundel Round-C SMD M 6W 220V IP65	6W	90 x 95	25°		82	