

# TEXUS PRO 300\500\1000




view



RAL



1 overall dimensions

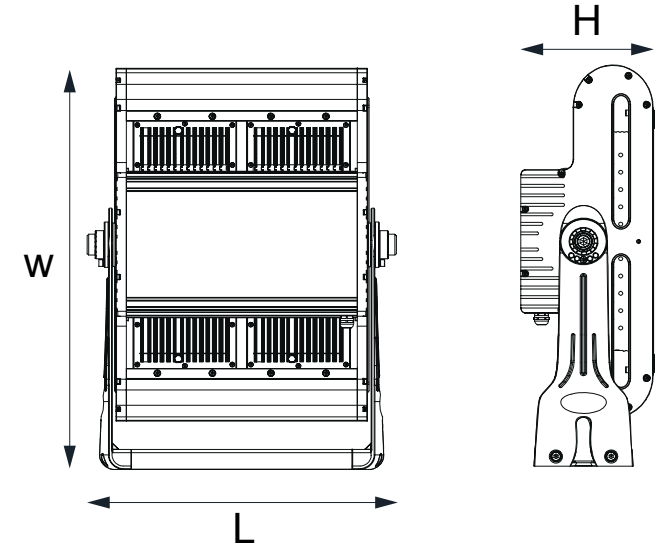

size

# TEXUS PRO 300\500\1000

Multifunctional floodlight for general purpose areas.

<b>Housing:</b>	Pressure die-cast aluminum alloy with polyester powder paint
<b>Housing color:</b>	Black, Grey, RAL
<b>Beam angle:</b>	15°, 30°, 60°
<b>IES protection classes:</b>	Class I (SELV)
<b>Color temperature, K:</b>	3000K - 6500K
<b>Color rendering index, Ra:</b>	>70
<b>Input voltage, V:</b>	220V
<b>Control system:</b>	Switch On\Off
<b>Power factor (PF):</b>	0.95
<b>Ingress Protection Rating, IP:</b>	IP66
<b>Operating temperature:</b>	-40°C ~ +50°C
<b>Guaranteed lifetime, hours:</b>	>75 000h

Article	Name	Power, W	Dimensions, mm	Input voltage, V	Beam angle, degrees	Color temperature, K	Weight, kg
786010120	TEXUS PRO 300W 220V IP66	300W	274x603x194	220V	15°, 30°, 60°	3000K-6500K	11.2kg
786010130	TEXUS PRO 500W 220V IP66	500W	450x603x195	220V	15°, 30°, 60°	3000K-6500K	18.3kg
786010140	TEXUS PRO 1000W 220V IP66	1000W	740x603x195	220V	15°, 30°, 60°	3000K-6500K	32.2kg