

# BLADER S



## view






RAL

## 1 overall dimensions

## 1

## size

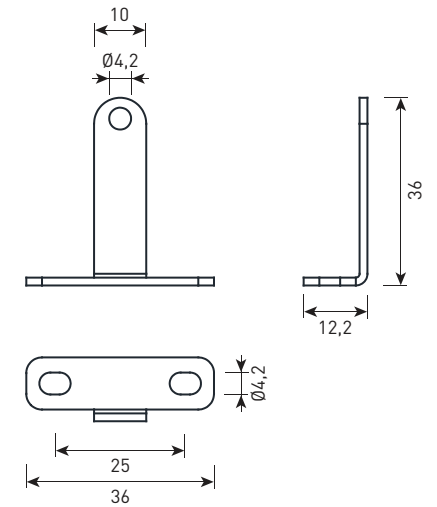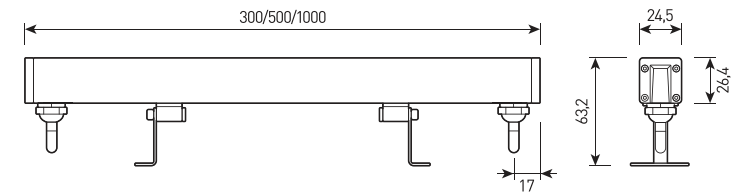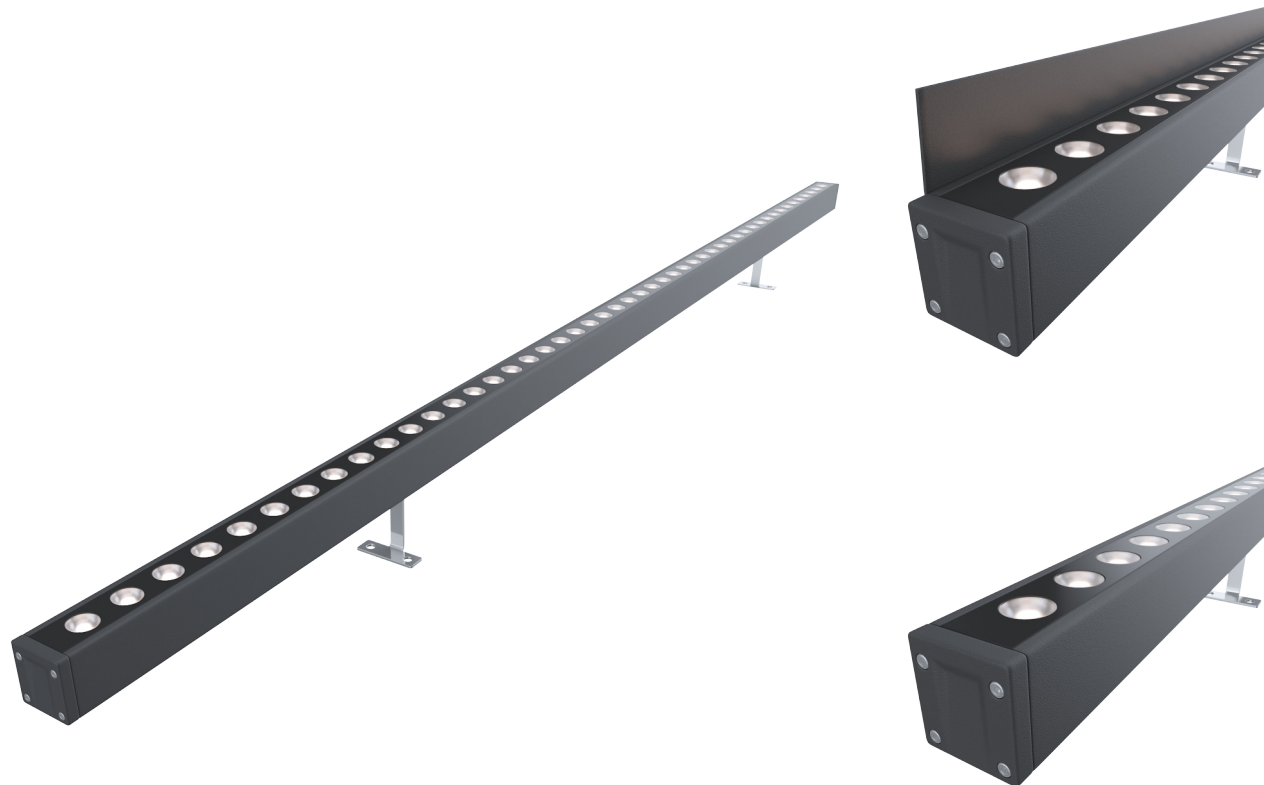

# BLADER S

Ultra-thin linear luminaire for architectural lighting.

<b>Housing:</b>	Extruded aluminum with a protective anti-corrosion coating
<b>Housing color:</b>	Black,Grey, RAL
<b>Beam angle:</b>	30°, 45°, 25°x45°, 120°
<b>IES protection classes:</b>	Class III (SELV)
<b>Color temperature, K:</b>	2700K, 3000K, 4000K, 5700K, R, G, B, RGB 3in1, RGBW 4in1
<b>Input voltage, V:</b>	24V
<b>Control system:</b>	On/Off, DMX-512
<b>Ingress Protection Rating, IP:</b>	IP66
<b>Operating temperature:</b>	-40°C ~ +50°C
<b>Weight:</b>	0,3-0,7kg

Article	Name	Power, W	Dimensions, mm	Input voltage, V	Beam angle, degrees	Color temperature, K	Weight, kg
744080010	BLADER S 4W 300mm 24V IP66 SINGLE COLOR	4W	300x24.5x26.4	24V	30°, 45°, 25°x45°, 120°	2700K, 3000K, 4000K, 5700K, R, G, B	0,3
744080012	BLADER S 4W 300mm 24V DMX RGB 3in1 IP66	4W	300x24.5x26.4	24V	30°, 45°, 25°x45°, 120°	RGB	0,3
744080014	BLADER S 5W 300mm 24V DMX RGBW 4in1 IP66	5W	300x24.5x26.4	24V	30°, 45°, 25°x45°, 120°	RGBW	0,3
744080016	BLADER S 6W 500mm 24V IP66 SINGLE COLOR	6W	500x24.5x26.4	24V	30°, 45°, 25°x45°, 120°	2700K, 3000K, 4000K, 5700K, R, G, B	0,5
744080018	BLADER S 6W 500mm 24V DMX RGB 3in1 4segm IP66	6W	500x24.5x26.4	24V	30°, 45°, 25°x45°, 120°	RGB	0,5
744080020	BLADER S 7W 500mm 24V DMX RGBW 4in1 4segm IP66	7W	500x24.5x26.4	24V	30°, 45°, 25°x45°, 120°	RGBW	0,5
744080022	BLADER S 12W 1000mm 24V IP66 SINGLE COLOR	12W	1000x24.5x26.4	24V	30°, 45°, 25°x45°, 120°	2700K, 3000K, 4000K, 5700K, R, G, B	0,7
744080024	BLADER S 12W 1000mm 24V DMX RGB 3in1 8segm IP66	12W	1000x24.5x26.4	24V	30°, 45°, 25°x45°, 120°	RGB	0,7
744080026	BLADER S 14W 1000mm 24V DMX RGBW 4in1 8segm IP66	14W	1000x24.5x26.4	24V	30°, 45°, 25°x45°, 120°	RGBW	0,7