


## view




RAL



- 1 ELFO S
- 2 Mounting pole bracket ELFO
- 3 Mounting pole bracket ELFO
- 4 Ground cup ELFO S

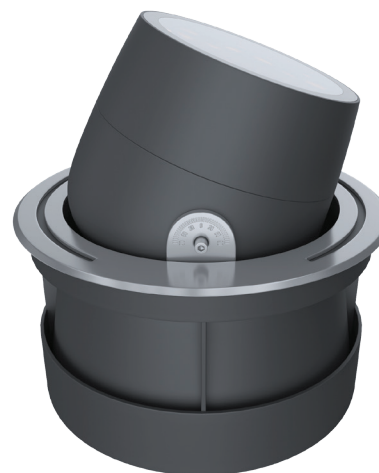

## size

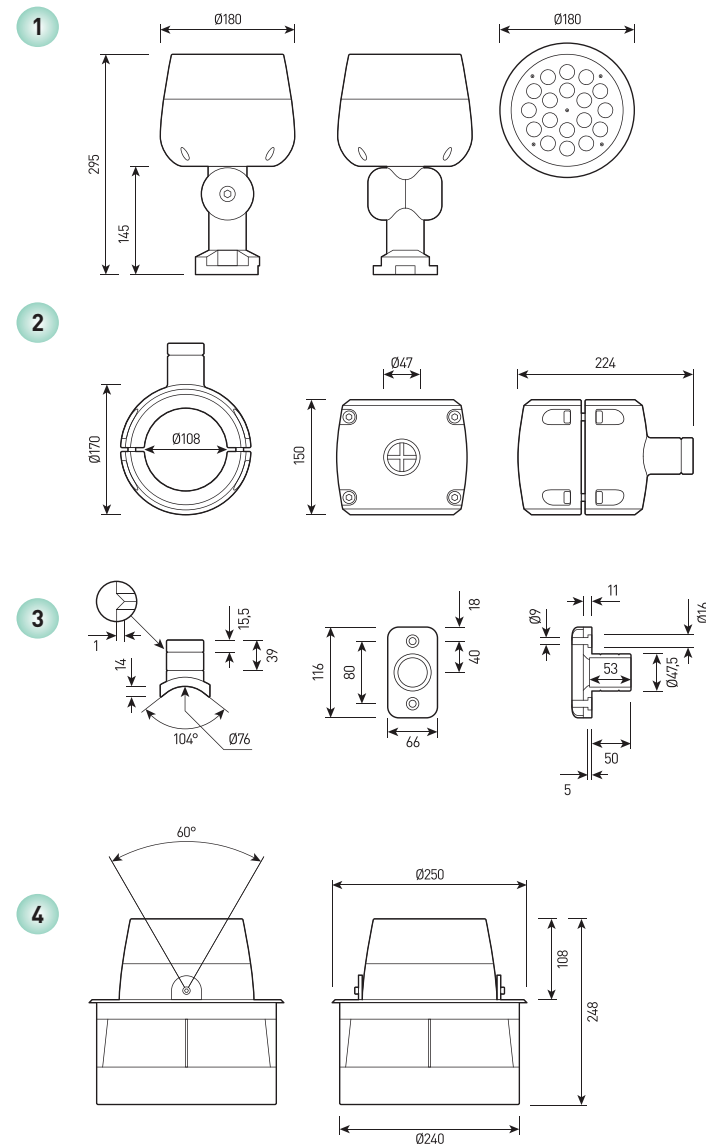

# ELFO S

Multifunctional spotlight for architectural lighting with a wide range of power and optics for a variety of tasks. The "Target" insert dissipates the light, protecting the eyes from direct light and blinding.

<b>Housing:</b>	Pressure die-cast aluminum alloy with polyester powder paint
<b>Fasteners:</b>	Stainless steel
<b>Beam angle:</b>	3,5°, 5°, 7°, 15°, 25°, 40°, 60°
<b>Housing color:</b>	Black, Grey, RAL
<b>IES protection classes:</b>	Class I (SELV)
<b>Color temperature:</b>	3000K, 4000K, 5000K, RGB 3in1, RGBW 4in1
<b>Input voltage:</b>	220V
<b>Control system:</b>	On/Off, DMX-512
<b>Ingress Protection Rating, IP:</b>	IP66
<b>Operating temperature:</b>	-40°C ~ +50°C
<b>Weight:</b>	2.3 kg

Article	Name	Power, W	Dimensions, mm	Input voltage, V	Beam angle, degrees	Color temperature, K	Weight, kg
731014012	ELFO S 14W DMX-512 220V IP66	14W	D180x150	220V	7°, 15°, 25°, 40°, 60°	3000K, 4000K, 5000K	2.3
731020009	ELFO S 20W DMX-512 220V IP66	20W	D180x150	220V	3,5°, 5°, 7°, 15°, 25°, 40°, 60°	3000K, 4000K, 5000K	2.3
731030009	ELFO S 30W DMX-512 220V IP66	30W	D180x150	220V	3,5°, 5°, 7°, 15°, 25°, 40°, 60°	3000K, 4000K, 5000K	2.3
731040018	ELFO S 40W DMX-512 220V IP66	40W	D180x150	220V	7°, 15°, 25°, 40°, 60°	3000K, 4000K, 5000K	2.3
731114012	ELFO S 14W RGB DMX-512 220V IP66	14W	D180x150	220V	7°, 15°, 25°, 40°, 60°	RGB	2.3
731120009	ELFO S 20W RGB DMX-512 220V IP66	20W	D180x150	220V	3,5°, 5°, 7°, 15°, 25°, 40°, 60°	RGB	2.3
731130009	ELFO S 30W RGB DMX-512 220V IP66	30W	D180x150	220V	3,5°, 5°, 7°, 15°, 25°, 40°, 60°	RGB	2.3
731140018	ELFO S 40W RGB DMX-512 220V IP66	40W	D180x150	220V	7°, 15°, 25°, 40°, 60°	RGB	2.3
731214012	ELFO S 14W RGBW DMX-512 220V IP66	14W	D180x150	220V	7°, 15°, 25°, 40°, 60°	RGBW	2.3
731220009	ELFO S 20W RGBW DMX-512 220V IP66	20W	D180x150	220V	3,5°, 5°, 7°, 15°, 25°, 40°, 60°	RGBW	2.3
731230009	ELFO S 30W RGBW DMX-512 220V IP66	30W	D180x150	220V	3,5°, 5°, 7°, 15°, 25°, 40°, 60°	RGBW	2.3
731240018	ELFO S 40W RGBW DMX-512 220V IP66	40W	D180x150	220V	7°, 15°, 25°, 40°, 60°	RGBW	2.3