

GARNET GLOW XS



view



RAL







1 overall dimensions



size

1

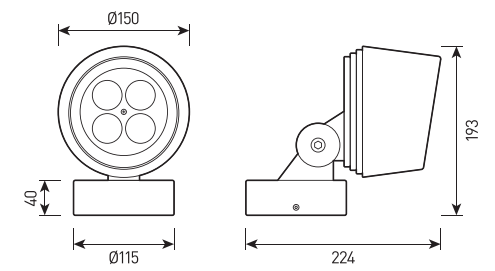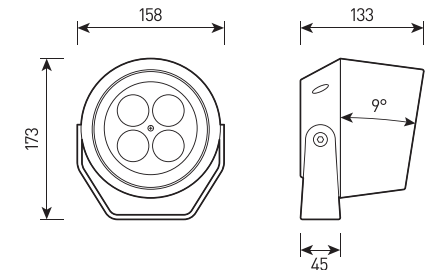

GARNET GLOW XS

Multifunctional spotlight for architectural lighting. Multichip 4-in-1 RGB+W Tunable White with DMX-512 operated, mounting version: on surface, to pillar

Housing:	Pressure die-cast aluminum alloy with polyester powder paint. Body and glass are fitted with silicone gaskets.
Fasteners:	Stainless steel, T=2.00mm
Beam angle:	2.6°, 3.5°, 12°, 15°, 20°, 30°, 60°, 10x70°, 5x20°, 15x60°
Housing color:	Black, Grey, RAL
IES protection classes:	Class I (SELV)
Color temperature, K:	2700K, 3000K, 4000K, 5000K, R, G, B, RGBW 4in1, Tunable white
Input voltage, V:	24V, 220V
Control system:	On/Off, 1-10V, DMX-512, DALI
Ingress Protection Rating, IP:	IP66
Operating temperature:	-40°C ~ +50°C
Weight, kg:	1.7 kg

Article	Name	Power, W	Dimensions, mm	Input voltage, V	Beam angle, degrees	Color temperature, K	Weight, kg
622009010	GARNET GLOW XS 9W 100V-264V IP66 Single Color	9W	158x173x133	220V	2.6°, 3.5°, 12°, 20°, 30°, 60°, 10x70, 5x20	2700K, 3000K, 4000K, 5000K, R, G, B	1.7
622009020	GARNET GLOW XS 9W DC24V RGBW 4in1 IP66	9W	158x173x133	24V	15°, 20°, 30°, 15x60	RGBW	1.7
622015010	GARNET GLOW XS 15W 100V-264V IP66 Single Color	15W	158x173x133	220V	2.6°, 3.5°, 12°, 20°, 30°, 60°, 10x70, 5x20	2700K, 3000K, 4000K, 5000K, R, G, B	1.7
622015020	GARNET GLOW XS 15W DC24V RGBW 4in1 IP66	15W	158x173x133	24V	15°, 20°, 30°, 15x60	RGBW	1.7
622020010	GARNET GLOW XS 20W 100V-264V IP66 Single Color	20W	158x173x133	220V	2.6°, 3.5°, 12°, 20°, 30°, 60°, 10x70, 5x20	2700K, 3000K, 4000K, 5000K, R, G, B	1.7
622020025	GARNET GLOW XS TW 20W DC24V IP66 DMX Tunable white 1800K - 6000K	20W	158x173x133	24V	2.6°, 3.5°, 12°, 20°, 30°, 60°, 10x70, 5x20	1800K-6000K Tunable white	1.7
622020020	GARNET GLOW XS 20W DC24V RGBW 4in1 IP66	20W	158x173x133	24V	15°, 20°, 30°, 15x60	RGBW	1.7