

GARNET GLOWBOX L/XL



view




RAL






1 GARNET GLOWBOX L

2 GARNET GLOWBOX XL



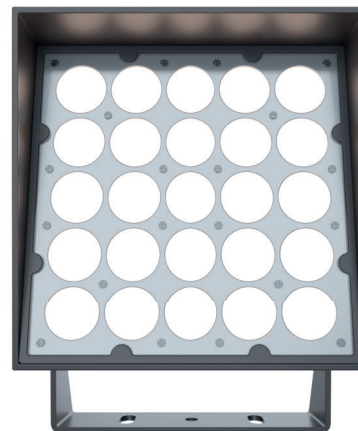


size

1

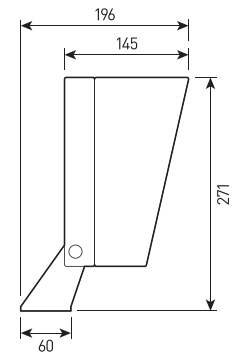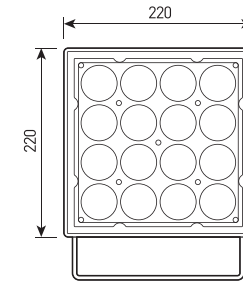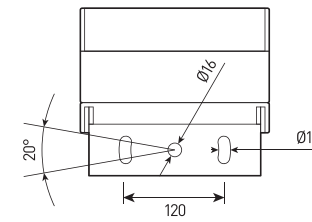

2

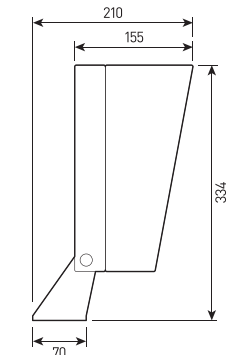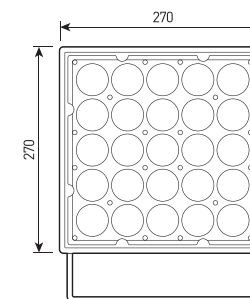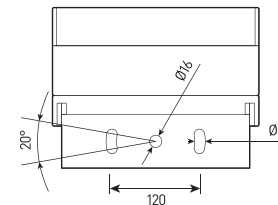

GARNET GLOWBOX L/XL

Multifunctional spotlight for architectural lighting.

Multichip 4-in-1 RGB+W Tunable White with DMX-512 operated, mounting version: on surface, to pillar

Housing:	Pressure die-cast aluminum alloy with polyester powder paint.
Housing color:	Black, Grey, RAL
Beam angle:	2.5°, 4.5°, 8°, 12°, 15°, 20°, 30°, 45°, 60°, 10x70°, 5x20°, 15x60°
IES protection classes:	Class I (SELV)
Color temperature, K:	2700K, 3000K, 4000K, 5000K, 6000K, R, G, B, RGB 3in1, RGBW 4in1, Tunable white
Input voltage, V:	36V, 220V
Control system:	On/Off, 1-10V, DMX-512, DALI, PWM, RDM
Ingress Protection Rating, IP:	IP66
Operating temperature:	-40°C ~ +50°C
Weight:	6.2 - 9.0 kg

Article	Name	Power, W	Dimensions, mm	Input voltage, V	Beam angle, degrees	Color Temperature, K	Weight, kg
622200044	GARNET GLOWBOX L 75W 24V/220V IP66 Single Color	75W	220x220x145	36V/220V	2.5°, 4.5°, 8°, 12°, 20°, 30°, 45°, 60°, 10x70°, 5x20°	2700K, 3000K, 4000K, 5000K, 6000K, R, G, B	6.2
622200046	GARNET GLOWBOX L 100W 24V RGBW 4in1 IP66	100W	220x220x145	36V	8°, 15°, 20°, 30°, 15x60°	RGBW	6.2
622200048	GARNET GLOWBOX XL 120W 24V/220V IP66 Single Color	120W	270x270x155	36V/220V	2.5°, 4.5°, 8°, 12°, 20°, 30°, 45°, 60°, 10x70°, 5x20°	2700K, 3000K, 4000K, 5000K, 6000K, R, G, B	9.0
622200050	GARNET GLOWBOX XL 150W 24V/220V IP66 Single Color	150W	270x270x155	36V/220V	2.5°, 4.5°, 8°, 12°, 20°, 30°, 45°, 60°, 10x70°, 5x20°	2700K, 3000K, 4000K, 5000K, 6000K, R, G, B	9.0
622200052	GARNET GLOWBOX XL 150W 24V RGBW 4in1 IP66	150W	270x270x155	36V	8°, 15°, 20°, 30°, 15x60°	RGBW	9.0
622200054	GARNET GLOWBOX XL 200W 24V RGBW 4in1 IP66	200W	270x270x155	36V	8°, 15°, 20°, 30°, 15x60°	RGBW	9.0