

GARNET STARLING



view



RAL






size

1 GARNET STARLING M

2 GARNET STARLING L

3 GARNET STARLING XL

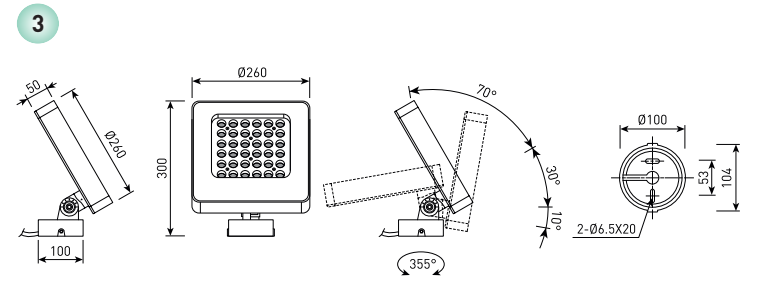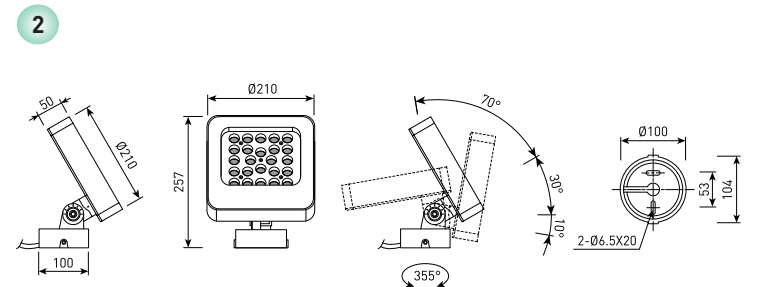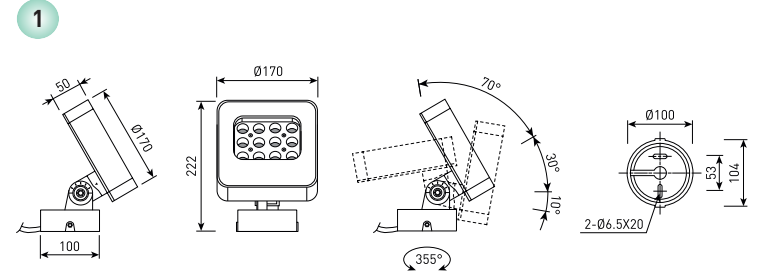

GARNET STARLING

Multifunctional floodlight for accent lighting

Housing:	Pressure die-cast aluminum alloy with polyester powder paint
Beam angle:	3°, 8°, 25°, 40°, 60°
Housing color:	Black, Grey, RAL
IES protection classes:	Class I (SELV)
Color temperature, K:	2700K, 3000K, 4000K, 5000K, 6000K, R, G, B, RGB 3in1, RGBW 4in1
Input voltage, V:	24V, 220V
Control system:	On/Off, 1-10V, DMX-512
Ingress Protection Rating, IP:	IP66
Operating temperature:	-40°C ~ +50°C
Weight, kg:	2.2 - 2.8 kg

Article	Name	Power, W	Dimensions, mm	Input voltage, V	Beam angle, degrees	Color temperature, K	Weight, kg
771036024	GARNET STARLING M 24W 24V/220V IP66 SINGLE	24W	170x50x222	24V, 220V	3°, 8°, 25°, 40°, 60°	2700K, 3000K, 4000K, 5000K, 6000K, R, G, B	2.2
771036034	GARNET STARLING M 36W RGB 3in1 DMX-512 24V IP66	36W	170x50x222	24V	25°, 40°, 60°	RGB	2.2
771036044	GARNET STARLING M 36W RGBW 4in1 DMX-512 24V IP66	36W	170x50x222	24V	25°, 40°, 60°	RGBW	2.2
771036054	GARNET STARLING L 48W 24V/220V IP66 SINGLE	48W	210x50x257	24V, 220V	3°, 8°, 25°, 40°, 60°	2700K, 3000K, 4000K, 5000K, 6000K, R, G, B	2.6
771036064	GARNET STARLING L 72W RGB 3in1 DMX-512 24V IP66	72W	210x50x257	24V	25°, 40°, 60°	RGB	2.6
771036074	GARNET STARLING L 72W RGBW 4in1 DMX-512 24V IP66	72W	210x50x257	24V	25°, 40°, 60°	RGBW	2.6
771036084	GARNET STARLING XL 60W 24V/220V IP66 SINGLE	60W	260x50x300	24V, 220V	3°, 8°, 25°, 40°, 60°	2700K, 3000K, 4000K, 5000K, 6000K, R, G, B	2.8
771036094	GARNET STARLING XL 108W RGB 3in1 DMX-512 24V IP66	108W	260x50x300	24V	25°, 40°, 60°	RGB	2.8
771036104	GARNET STARLING XL 108W RGBW 4in1 DMX-512 24V IP66	108W	260x50x300	24V	25°, 40°, 60°	RGBW	2.8