

GLOWMAX I,II



view



RAL




1 GLOWMAX I


2 GLOWMAX II

size

1

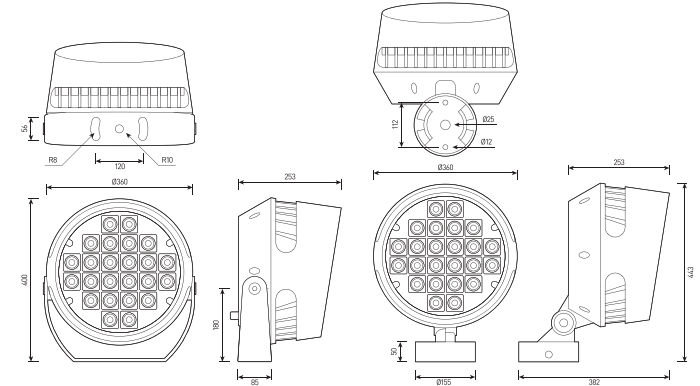

2

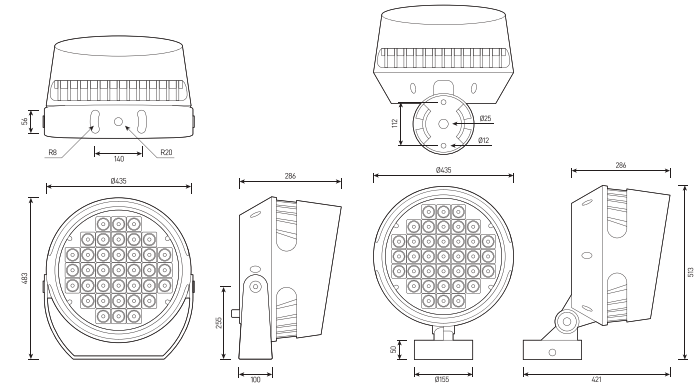

GLOWMAX I,II

Multifunctional projector for architectural lighting.
Multichip 4-in-1 RGB+W, Tunable White with DMX-512 control.

Housing:	Pressure die-cast aluminum alloy with polyester powder paint. The body and glass have silicone seals.
Beam angle:	1.5°, 2° [searchlight], 5°, 8°, 12°, 12.5°, 20°, 30°, 60°, 10x70°, 5x20°, 15x60°
Housing color:	Black, Grey, RAL
IES protection classes:	Class I (SELV)
Color temperature, K:	2700K - 6000K, R, G, B, RGB 3in1, RGBW 4in1, RGBWCLA 7in1, Tunable White
Input voltage, V:	36V, 220V
Control system:	On/Off, 1-10V, DMX-512, RDM, DALI
Ingress Protection Rating, IP:	IP66
Operating temperature:	-40°C ~ +50°C
Weight, kg:	10 - 13 kg

Article	Name	Power, W	Dimensions, mm	Input voltage, V	Beam angle, degrees	Color temperature, K	Weight, kg
622200130	GLOWMAX I 120W 36V/220V IP66 Single Color	120W	360x253x400	36V, 220V	1.5° [searchlight]	2700K, 3000K, 4000K, 5000K, 6000K, R, G, B	10.0
622200131	GLOWMAX I 150W 36V/220V RGBW 4in1 IP66	150W	360x253x400	36V, 220V	4,5°, 8°, 12°, 20°, 30°, 40°, 60°, 10x70°, 5x20°	RGBW	10.0
622200132	GLOWMAX I 200W 36V/220V IP66 Single Color	200W	360x253x400	36V, 220V	15°, 20°, 30°, 15x60°	2700K, 3000K, 4000K, 5000K, 6000K, R, G, B	10.0
622200134	GLOWMAX I 240W 36V/220V IP66 Single Color	240W	360x253x400	36V, 220V	4,5°, 8°, 12°, 20°, 30°, 40°, 60°, 10x70°, 5x20°	2700K, 3000K, 4000K, 5000K, 6000K, R, G, B	10.0
622200136	GLOWMAX I 240W 36V/220V RGBW 4in1 IP66	240W	360x253x400	36V, 220V	4,5°, 8°, 12°, 20°, 30°, 40°, 60°, 10x70°, 5x20°	RGBW	10.0
622200138	GLOWMAX I 200W 36V/220V RGBWCLA 7in1 IP66	200W	360x253x400	36V, 220V	8°, 15°, 20°, 30°, 15x60°	RGBWCLA[RGBW+CYAN+YELLOW+AMBER]	10.0
622200140	GLOWMAX II 190W 36V/220V IP66 Single Color	190W	435x286x483	36V, 220V	1.5° [searchlight]	2700K, 3000K, 4000K, 5000K, 6000K, R, G, B	13.0
622200142	GLOWMAX II 300W 36V/220V IP66 Single Color	300W	435x286x483	36V, 220V	2° [searchlight]	2700K, 3000K, 4000K, 5000K, 6000K, R, G, B	13.0
622200144	GLOWMAX II 360W 36V/220V IP66 Single Color	300W	435x286x483	36V, 220V	4,5°, 8°, 12°, 20°, 30°, 40°, 60°, 10x70°, 5x20°	2700K, 3000K, 4000K, 5000K, 6000K, R, G, B	13.0
622200146	GLOWMAX II 360W 36V/220V RGBW 4in1 IP66	360W	435x286x483	36V, 220V	4,5°, 8°, 12°, 20°, 30°, 40°, 60°, 10x70°, 5x20°	RGBW	13.0
622200148	GLOWMAX II 300W 36V/220V RGBWCLA 7in1 IP66	300W	435x286x483	36V, 220V	8°, 15°, 20°, 30°, 15x60°	RGBWCLA[RGBW+CYAN+YELLOW+AMBER]	13.0