

HOVER L/XL







view



- 1 HOVER L
- 2 HOVER XL
- 3 rotation


size

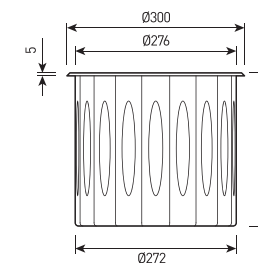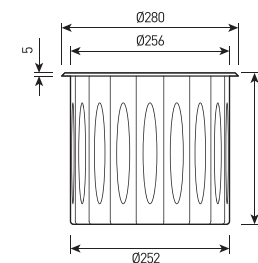

1

2

3

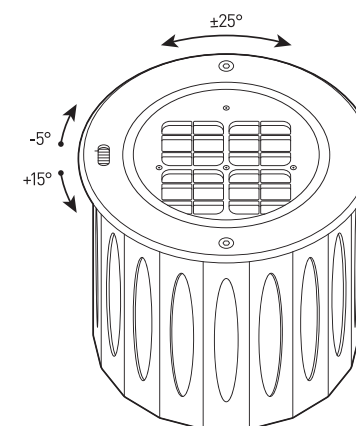

HOVER XL



HOVER L



HOVER L/XL

Recessed ground luminaire with adjustable optical part, which allows directing the light flux to the object with optimal accuracy

Housing:	Pressure die-cast aluminum alloy with polyester powder paint
Housing color:	Grey
Beam angle:	4,5°, 8°, 12°, 15°, 20°, 30°, 60°, 10x30°, 10x60°, 10x70°, 5x20°
IES protection classes:	Class I (SELV)
Color temperature, K:	2700K, 3000K, 4000K, 5000K, 6000K, R, G, B, RGB 3in1, RGBW 4in1, Tunable white
Input voltage, V:	24V, 220V
Control system:	On/Off, 1-10V, DMX-512, DALI
Ingress Protection Rating, IP:	IP68
Operating temperature:	-40°C ~ +50°C
Weight:	1-5kg

Article	Name	Power, W	Dimensions, mm	Input voltage, V	Beam angle, degrees	Color temperature, K	Weight, kg
791200130	HOVER L 60W 24V/220V IP68 Single color	60W	D280x240	24V/220V	4,5°, 8°, 12°, 20°, 30°, 60°, 10x70°, 5x20°	2700K, 3000K, 4000K, 5000K, 6000K, R, G, B, RGB 3in1, RGBW 4in1, Tunable white	3,5
791200132	HOVER L 60W 24V DMX-512 IP68 RGB 3 in 1	60W	D280x240	24V	15°, 20°, 30°, 10x30°, 10x60°	RGB	3,5
791200134	HOVER L 60W 24V DMX-512 IP68 RGBW 4 in	60W	D280x240	24V	15°, 20°, 30°, 10x30°, 10x60°	RGBW	3,6
791200136	HOVER XL 90W 24V/220V IP68 Single color	90W	D300x260	24V/220V	4,5°, 8°, 12°, 20°, 30°, 60°, 10x70°, 5x20°	2700K, 3000K, 4000K, 5000K, 6000K, R, G, B, RGB 3in1, RGBW 4in1, Tunable white	5
791200138	HOVER XL 90W 24V DMX-512 IP68 RGB 3 in 1	90W	D300x260	24V	15°, 20°, 30°, 10x30°, 10x60°	RGB	5
791200140	HOVER XL 90W 24V DMX-512 IP68 RGBW 4 in 1	90W	D300x260	24V	15°, 20°, 30°, 10x30°, 10x60°	RGBW	5