

# LAULED BASIC



## view



RAL







## 1 overall dimensions



## size

### 1

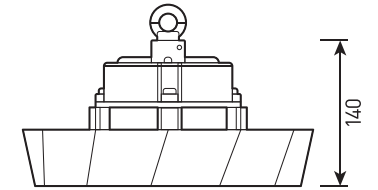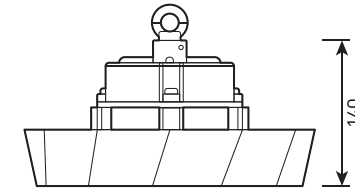

# LAULED BASIC

Pendant industrial LED lighting IP65

<b>Housing:</b>	Pressure die-cast aluminum alloy with polyester powder paint
<b>Beam angle:</b>	30°, 60°, 70°, 90°, 120°
<b>Housing color:</b>	Grey, White, RAL
<b>IES protection classes:</b>	Class I (SELV)
<b>Color temperature, K:</b>	3000K, 4000K, 5000K, 6000K, 6500K
<b>Color rendering index, Ra:</b>	>75
<b>Overvoltage protection:</b>	>6.5KV
<b>Input voltage, V:</b>	220V
<b>Power factor (PF):</b>	0.9
<b>Control system:</b>	On/Off, 1-10V, PWM, DALI
<b>Ingress Protection Rating, IP:</b>	IP65
<b>Operating temperature:</b>	-40°C ~ +50°C
<b>Weight, kg:</b>	3.4 - 10.0 kg

Article	Name	Power, W	Dimensions, mm	Input voltage, V	Beam angle, degrees	Color temperature, K	Weight, kg
795100002	LAULED BASIC 100W 220V non-dim IP65	100W	D260x140	220V	30°, 60°, 90°, 120°	3000K, 4000K, 5000K, 6000K, 6500K	3.4
795150003	LAULED BASIC 150W 220V non-dim IP65	150W	D260x140	220V	30°, 60°, 90°, 120°	3000K, 4000K, 5000K, 6000K, 6500K	3.8
795200004	LAULED BASIC 200W 220V non-dim IP65	200W	D260x140	220V	30°, 60°, 90°, 120°	3000K, 4000K, 5000K, 6000K, 6500K	4.5
795200005	LAULED BASIC 340W 220V non-dim IP65	340W	D295x140	220V	70°, 90°	3000K, 4000K, 5000K, 6000K, 6500K	10.0
400052	LAULED BASIC 60°/90°/120° ALUMINUM REFLECTOR	-	-	-	-	-	0.58
400057	LAULED BASIC MATT DIFFUSER FOR ALUMINUM REFLECTOR	-	-	-	-	-	0.6
400082	LAULED BASIC MOUNTING LYRA	-	-	-	-	-	0.2