



view



size

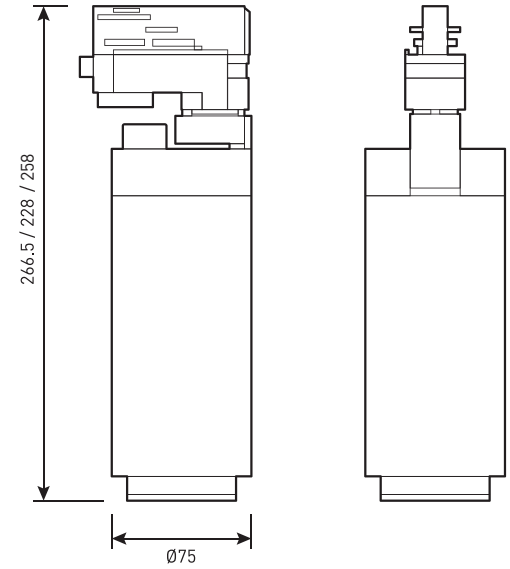

PICCO

Track spotlight for art galleries, museums and exhibitions

Housing:	Pressure die-cast aluminum alloy with polyester powder paint
Beam angle:	15°-90°
Housing color:	Black, White
Glass:	Clear tempered glass
Reflector:	Anodized aluminum
Color temperature:	2700K, 3000K, 4000K, 5000K
Color rendering index, CRI:	>90
Ingress Protection Rating, IP:	IP20
Control system:	1-10V
Luminous flux:	2300 lm
Power factor:	>0,90
Flicker:	5%
Guaranteed lifetime, hours:	>50 000h

Article	Name	Power	Dimensions, mm	Input voltage	Beam angle, degrees	Color temperature, K	Weight, kg
526015035	PICCO 15W 927 Dim 1-10V Beam Adjust 220V IP20	15 W	Ø75×266,5	220 V	15°-90°	2700K	1.0
526015040	PICCO 15W 930 Dim 1-10V Beam Adjust 220V IP20	15 W	Ø75×266,5	220 V	15°-90°	3000K	1.0
526015045	PICCO 15W 940 Dim 1-10V Beam Adjust 220V IP20	15 W	Ø75×266,5	220 V	15°-90°	4000K	1.0
526015050	PICCO 15W 950 Dim 1-10V Beam Adjust 220V IP20	15 W	Ø75×266,5	220 V	15°-90°	5000K	1.0
526020015	PICCO 20W Dim 1-10V Beam Adjust 220V IP20	20 W	Ø75×228	220 V	15°-90°	2700K, 3000K, 4000K	1.0
526030020	PICCO 30W Dim 1-10V Beam Adjust 220V IP20	30 W	Ø75×258	220 V	15°-90°	2700K, 3000K, 4000K	1.1