

view




RAL



1 overall dimensions

1

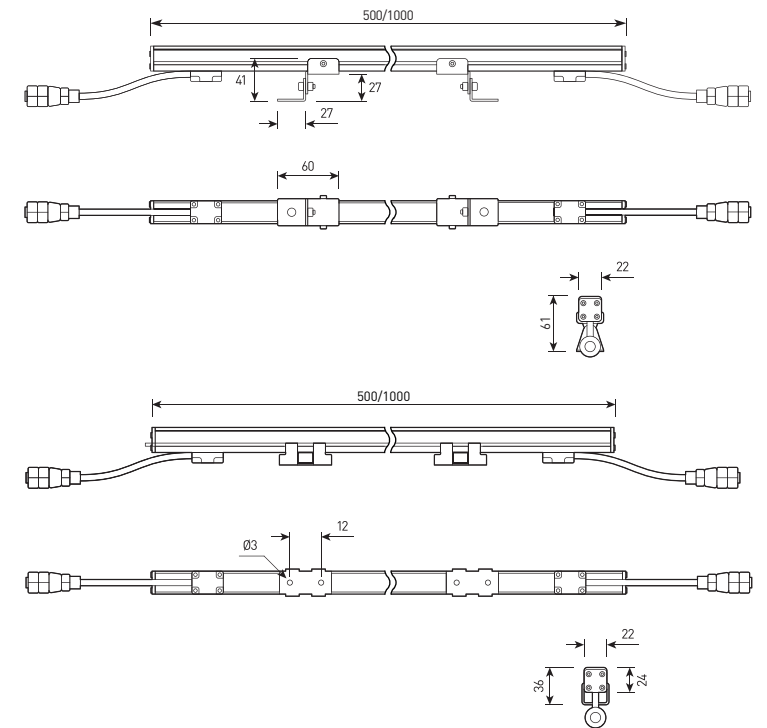

size

PITCH

Compact linear luminaire for architectural lighting

Housing:	Extruded aluminum with a protective anti-corrosion coating
Beam angle:	30°, 60°, 120°
Housing color:	Black, Metallic, RAL
IES protection classes:	Class III (SELV)
Color temperature, K:	2700K, 3000K, 4000K, 5700K, R, G, B, RGB 3in1, RGBW 4in1
Input voltage, V:	24V
Control system:	On/Off, DMX-512
Ingress Protection Rating, IP:	IP65
Operating temperature:	-40°C ~ +50°C
Weight, kg:	0.5 - 1.0kg

Article	Name	Power, W	Dimensions, mm	Input voltage, V	Beam angle, degrees	Color temperature, K	Weight, kg
744080070	PITCH 10W 1000mm 24V IP65 SINGLE COLOR	10W	1000x22x61	24V	30°, 60°, 120°	2700K, 3000K, 4000K, 5700K, R, G, B	1.0
744080071	PITCH 5W 500mm 24V IP65 SINGLE COLOR	5W	500x22x61	24V	30°, 60°, 120°	2700K, 3000K, 4000K, 5700K, R, G, B	0.5
744080072	PITCH 10W 1000mm RGB 3in1 DMX-512 24V IP65	10W	1000x22x61	24V	30°, 60°, 120°	RGB	1.0
744080073	PITCH 5W 500mm RGB 3in1 DMX-512 24V IP65	5W	500x22x61	24V	30°, 60°, 120°	RGB	0.5
744080074	PITCH 10W 1000mm RGBW 4in1 DMX-512 24V IP65	10W	1000x22x61	24V	30°, 60°, 120°	RGBW	1.0
744080075	PITCH 5W 500mm RGBW 4in1 DMX-512 24V IP65	5W	500x22x61	24V	30°, 60°, 120°	RGBW	0.5
744080076	PITCH 15W 1000mm 24V IP65 SINGLE COLOR	15W	1000x22x61	24V	30°, 60°, 120°	2700K, 3000K, 4000K, 5700K, R, G, B	1.0
744080077	PITCH 7.5W 500mm 24V IP65 SINGLE COLOR	7.5W	500x22x61	24V	30°, 60°, 120°	2700K, 3000K, 4000K, 5700K, R, G, B	0.5
744080078	PITCH 15W 1000mm RGB 3in1 DMX-512 24V IP65	15W	1000x22x61	24V	30°, 60°, 120°	RGB	1.0
744080079	PITCH 7.5W 500mm RGB 3in1 DMX-512 24V IP65	7.5W	500x22x61	24V	30°, 60°, 120°	RGB	0.5
744080080	PITCH 15W 1000mm RGBW 4in1 DMX-512 24V IP65	15W	1000x22x61	24V	30°, 60°, 120°	RGBW	1.0
744080081	PITCH 7.5W 500mm RGBW 4in1 DMX-512 24V IP65	7.5W	500x22x61	24V	30°, 60°, 120°	RGBW	0.5