

RALLUS AXEL










view



size

- 1 RALLUS AXEL XS
- 2 RALLUS AXEL S
- 3 RALLUS AXEL M
- 4 RALLUS AXEL L
- 5 RALLUS AXEL XL
- 6 RALLUS AXEL XXL

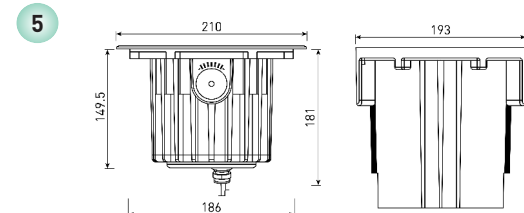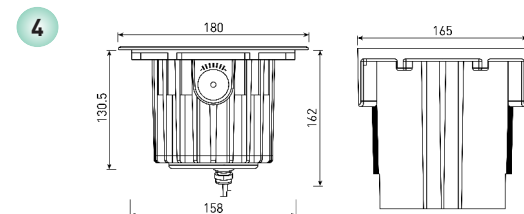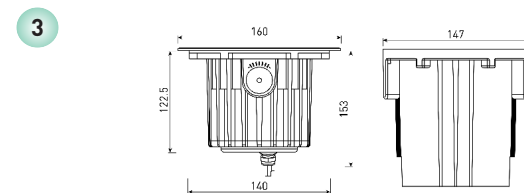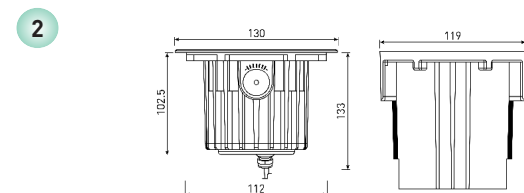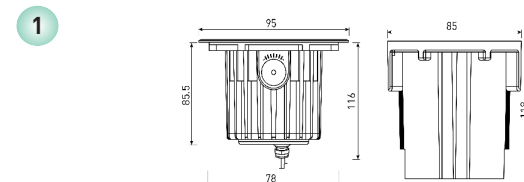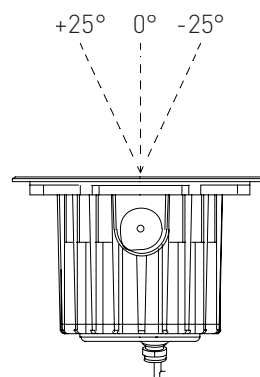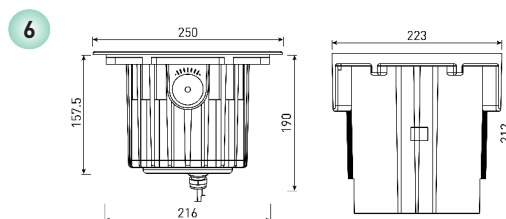

RALLUS AXEL

Recessed ground lighting with adjustable optical part, which allows directing the light flux to the object with optimal accuracy

Housing:	Pressure die-cast aluminum alloy with polyester powder paint
Beam angle:	3°, 8°, 25°, 40°, 60°
Housing color:	Metallic
IES protection classes:	Class I (SELV)
Color temperature, K:	2700K, 3000K, 4000K, 5000K, 6000K, R, G, B, RGB 3in1, RGBW 4in1, Tunable white
Input voltage, V:	24V, 220V
Control system:	On/Off, 1-10V, DMX-512, TRIAC, DALI, PWM
Ingress Protection Rating, IP:	IP67
Operating temperature:	-40°C ~ +50°C
Weight, kg:	0.8-4.5kg

Article	Name	Power, W	Dimensions, mm	Input voltage, V	Beam angle, degrees	Color temperature, K	Weight, kg
791200012	RALLUS AXEL XS 2W 24V/220V IP67 SINGLE	2W	D95x116	24V/220V	3°, 8°, 25°, 40°, 60°	2700K, 3000K, 4000K, 5000K, 6000K	0.8
791200014	RALLUS AXEL XS 3W 24V DMX-512 IP67 RGB 3in1	3W	D95x116	24V	25°, 40°, 60°	RGB	0.8
791200016	RALLUS AXEL XS 3W 24V DMX-512 IP67 RGBW 4in1	3W	D95x116	24V	25°, 40°, 60°	RGBW	0.8
791200018	RALLUS AXEL S 6W 24V/220V IP67 SINGLE	6W	D130x133	24V/220V	3°, 8°, 25°, 40°, 60°	2700K, 3000K, 4000K, 5000K, 6000K	1.1
791200020	RALLUS AXEL S 9W 24V DMX-512 IP67 RGB 3in1	9W	D130x133	24V	25°, 40°, 60°	RGB	1.1
791200022	RALLUS AXEL S 9W 24V DMX-512 IP67 RGBW 4in1	9W	D130x133	24V	25°, 40°, 60°	RGBW	1.1
791200024	RALLUS AXEL M 12W 24V/220V IP67 SINGLE	12W	D160x153	24V/220V	3°, 8°, 25°, 40°, 60°	2700K, 3000K, 4000K, 5000K, 6000K	1.5
791200026	RALLUS AXEL M 12W 24V DMX-512 IP67 RGB 3in1	21W	D160x153	24V	25°, 40°, 60°	RGB	1.5
791200028	RALLUS AXEL M 12W 24V DMX-512 IP67 RGBW 4in1	12W	D160x153	24V	25°, 40°, 60°	RGBW	1.5
791200030	RALLUS AXEL L 18W 24V/220V IP67 SINGLE	18W	D180x162	24V/220V	3°, 8°, 25°, 40°, 60°	2700K, 3000K, 4000K, 5000K, 6000K	2.1
791200032	RALLUS AXEL L 18W 24V DMX-512 IP67 RGB 3in1	18W	D180x162	24V	25°, 40°, 60°	RGB	2.1
791200034	RALLUS AXEL L 18W 24V DMX-512 IP67 RGBW 4in1	18W	D180x162	24V	25°, 40°, 60°	RGBW	2.1
791200036	RALLUS AXEL XL 27W 24V/220V IP67 SINGLE	27W	D210x181	24V/220V	3°, 8°, 25°, 40°, 60°	2700K, 3000K, 4000K, 5000K, 6000K	3.2
791200038	RALLUS AXEL XL 27W 24V DMX-512 IP67 RGB 3in1	27W	D210x181	24V	25°, 40°, 60°	RGB	3.2
791200040	RALLUS AXEL XL 27W 24V DMX-512 IP67 RGBW 4in1	27W	D210x181	24V	25°, 40°, 60°	RGBW	3.2
791200042	RALLUS AXEL XXL 36W 24V/220V IP67 SINGLE	36W	D250x190	24V/220V	3°, 8°, 25°, 40°, 60°	2700K, 3000K, 4000K, 5000K, 6000K	4.5
791200044	RALLUS AXEL XXL 36W 24V DMX-512 IP67 RGB 3in1	36W	D250x190	24V	25°, 40°, 60°	RGB	4.5
791200046	RALLUS AXEL XXL 36W 24V DMX-512 IP67 RGBW 4in1	36W	D250x190	24V	25°, 40°, 60°	RGBW	4.5