



view

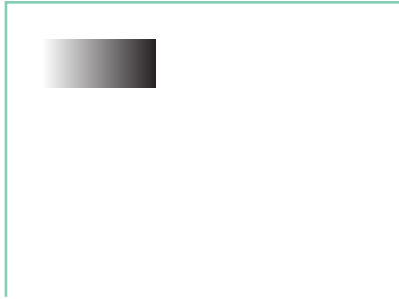


1 overall dimensions

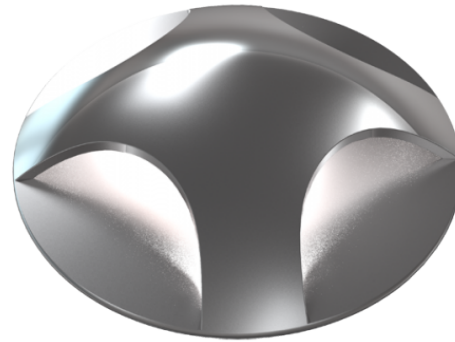

size

1

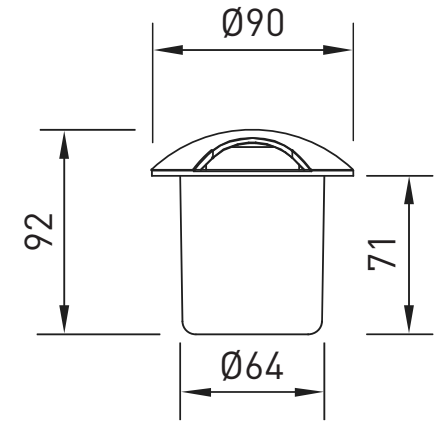

ZIBO

Ground recessed LED light IP67. It can withstand the load on the outer part up to 2000 kg

Housing:	Pressure die-cast aluminum alloy with polyester powder paint
Fronted cover:	Stainless steel, T=2.00 mm
Beam angle:	60°, 2x60°, 4x60°, 12x15°
Housing color:	Metallic
IES protection classes:	Class I (SELV)
Color temperature, K:	3000K, 4000K, 5000K
Input voltage, V:	24V, 220V
Control system:	On/Off
Ingress Protection Rating, IP:	IP67
Operating temperature:	-40°C ~ +50°C
Weight, kg:	0.85 kg

Article	Name	Power, W	Dimensions, mm	Input voltage, V	Beam angle, degrees	Color temperature, K	Weight, kg
793031010	ZIBO1 3W SINGLE 24V/220V IP67 1 beam	3W	D90x92	24V, 220V	60°	3000K, 4000K, 5000K	0.85
793042020	ZIBO2 4W SINGLE 24V/220V IP67 2 beams	4W	D90x92	24V, 220V	2x60°	3000K, 4000K, 5000K	0.85
793044040	ZIBO3 4W SINGLE 24V/220V IP67 4 beams	4W	D90x92	24V, 220V	4x60°	3000K, 4000K, 5000K	0.85
793084160	ZIBO4 4W SINGLE 24V/220V IP67 multi	4W	D90x92	24V, 220V	12x15°	3000K, 4000K, 5000K	0.85