



view



RAL



1 overall dimensions

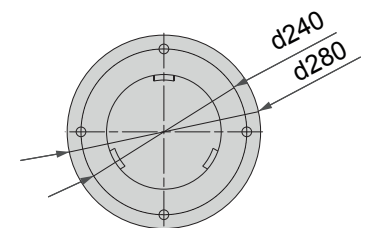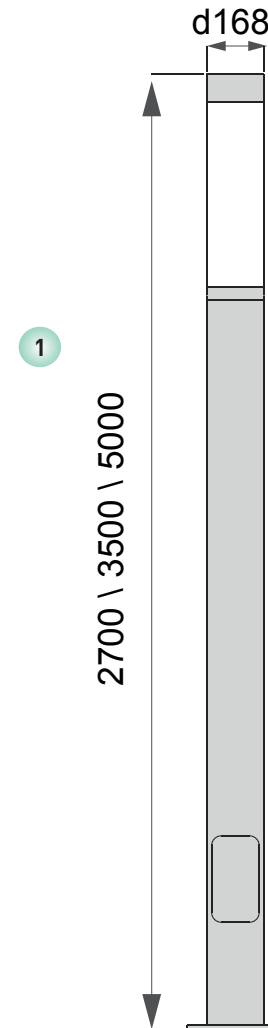

size



BERG

Universally designed park LED Bollard with different heights. Driver and power supply is located inside the housing. Ground or floor stable mounting is possible by using flange. The series of light intended for landscape lighting, shopping centres and business-center.

Housing:	Pressure die-cast aluminum alloy with polyester powder paint.
Beam angle:	diffused light
Housing color:	Metallic, RAL
Color temperature, K:	3000K -6000K
Color rendering index, CRI:	>70
IK:	>08
Control system:	Switch On\Off
Input voltage, V:	220V
Ingress Protection Rating, IP:	IP65
Operating temperature:	-40°C to +45°C (at startup -25°C)

Article		Name	Power, W	Dimensions, mm	Input voltage, V	Beam angle, degrees	Color Temperature, K	Weight, kg
71205027	BERG 50W 2700mm IP65		50W	d168x2700	220V	diffused light	3000K-6000K	20,4kg
71205035	BERG 50W 3500mm IP65		50W	d168x3500	220V	diffused light	3000K-6000K	24kg
71205050	BERG 50W 5000mm IP65		50W	d168x5000	220V	diffused light	3000K-6000K	38kg