

view





RAL



size

1 overall dimensions

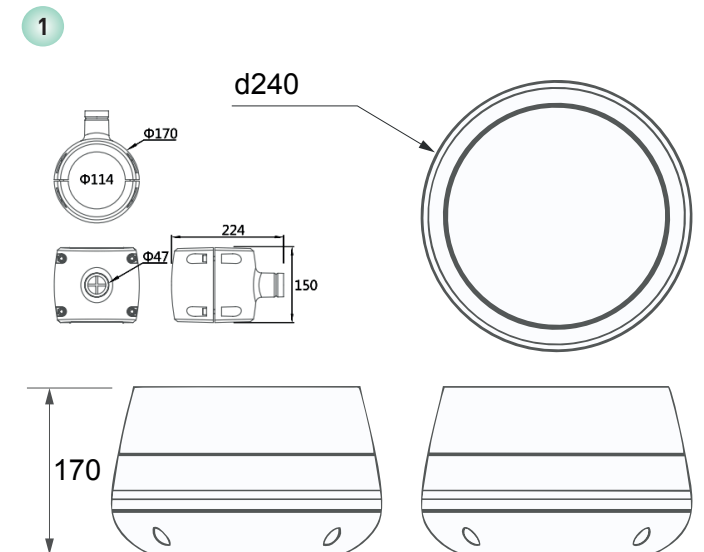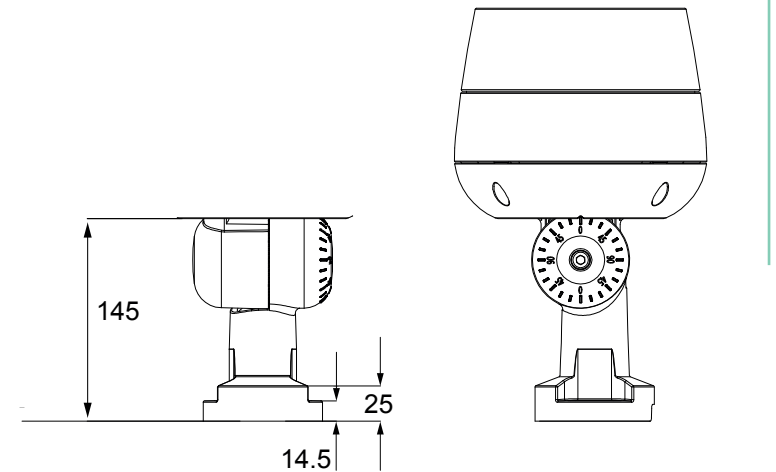

ELFO M

Multifunctional spotlight for architectural lighting with a wide range of power and optics for a variety of tasks. The "Target" insert dissipates the light, protecting the eyes from direct light and blinding.

Housing:	Pressure die-cast aluminum alloy with polyester powder paint
Fasteners:	stainless steel
Glass:	Tempered glass, T= 5 mm
Beam angle:	3.5°, 5°, 7°, 15°, 25°, 40°, 60°
Housing color:	Black, RAL
Color rendering index, CRI:	>70
Color temperature, K:	2700K, 3000K, 4000K, 5000K, RGB, RGBW
Input voltage, V:	220V
Control system:	Switch On\Off, DMX-512
Ingress Protection Rating, IP:	IP66
Operating temperature:	-40°C ~ +40°C

Article	Name	Power, W	Dimensions, mm	Input voltage, V	Beam angle, degrees	Color temperature, K	Weight, kg
732040009	ELFO M 40W DMX-512 220V IP66	40W	d240x170	220V	7°, 15°, 25°, 40°, 60°	3000K, 4000K, 5000K	5.7kg
732055009	ELFO M 55W DMX-512 220V IP66	55W	d240x170	220V	3,5°, 5°, 7°, 15°, 25°, 40°, 60°	3000K, 4000K, 5000K	5.7kg
732060012	ELFO M 60W DMX-512 220V IP66	60W	d240x170	220V	3,5°, 5°, 7°, 15°, 25°, 40°, 60°	3000K, 4000K, 5000K	5.7kg
732080018	ELFO M 80W DMX-512 220V IP66	80W	d240x170	220V	7°, 15°, 25°, 40°, 60°	3000K, 4000K, 5000K	5.7kg
732012020	ELFO M 120W DMX-512 220V IP66	120W	d240x170	220V	7°, 15°, 25°, 40°, 60°	3000K, 4000K, 5000K	5.7kg
732140009	ELFO M 40W RGB DMX-512 220V IP66	40W	d240x170	220V	7°, 15°, 25°, 40°, 60°	RGB	5.7kg
732155009	ELFO M 55W RGB DMX-512 220V IP66	55W	d240x170	220V	3,5°, 5°, 7°, 15°, 25°, 40°, 60°	RGB	5.7kg
732160012	ELFO M 60W RGB DMX-512 220V IP66	60W	d240x170	220V	3,5°, 5°, 7°, 15°, 25°, 40°, 60°	RGB	5.7kg
732180018	ELFO M 80W RGB DMX-512 220V IP66	80W	d240x170	220V	7°, 15°, 25°, 40°, 60°	RGB	5.7kg
732240009	ELFO M 40W RGBW DMX-512 220V IP66	40W	d240x170	220V	7°, 15°, 25°, 40°, 60°	RGBW	5.7kg
732260012	ELFO M 60W RGBW DMX-512 220V IP66	60W	d240x170	220V	3,5°, 5°, 7°, 15°, 25°, 40°, 60°	RGBW	5.7kg
732280018	ELFO M 80W RGBW DMX-512 220V IP66	80W	d240x170	220V	7°, 15°, 25°, 40°, 60°	RGBW	5.7kg
732212020	ELFO M 120W RGBW DMX-512 220V IP66	120W	d240x170	220V	7°, 15°, 25°, 40°, 60°	RGBW	5.7kg