

view




RAL



size

1 overall dimensions

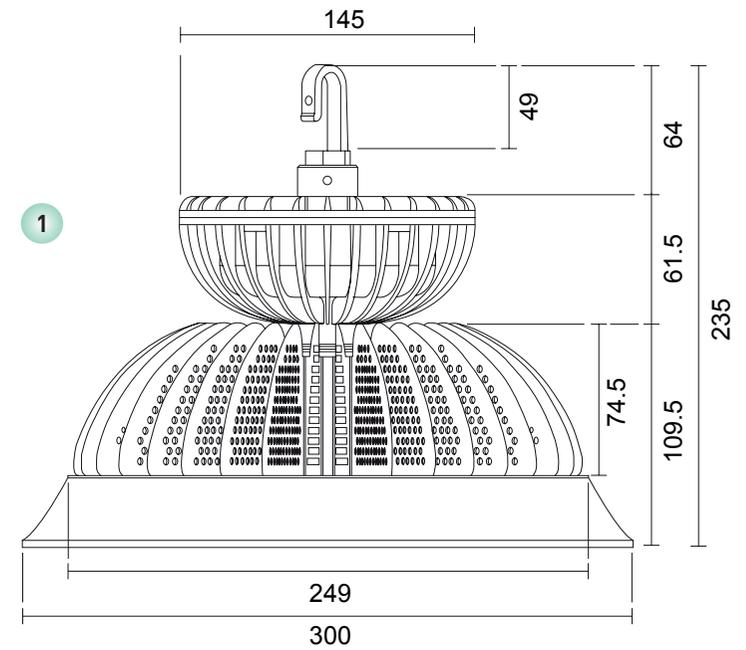

LAULED

Pendant industrial LED lighting IP65.

Housing:	Pressure die-cast aluminum alloy with polyester powder paint
Housing color:	Grey, White, RAL
Beam angle:	45°, 70°, 90°, 110°
IES protection classes:	Class I (SELV)
Color temperature, K:	4000K - 6000K
Color rendering index, Ra:	>75
Overvoltage protection:	>6.5KV
Input voltage, V:	220V
Power factor (PF):	0.9
Control system:	Switch On\Off, 1-10V, PWM, DALI
Ingress Protection Rating, IP:	IP65
Operating temperature:	-40°C ~ +50°C
Guaranteed lifetime, hours:	>50 000h

Article	Name	Power, W	Dimensions, mm	Input voltage, V	Beam angle, degrees	Color temperature, K	Weight, kg
79509001	LAULED 90W 220V non-dim IP65	90W	d 300x205	220V	110°	4000K, 5000K, 6000K	3,5kg
79509011	LAULED 90W 220V dimm PWM or 1-10V IP65	90W	d 300x205	220V	110°	4000K, 5000K, 6000K	3,5kg
79511001	LAULED 110W 220V non-dim IP65	110W	d 300x205	220V	110°	4000K, 5000K, 6000K	3,5kg
79511011	LAULED 110W 220V dimm PWM or 1-10V IP65	110W	d 300x205	220V	110°	4000K, 5000K, 6000K	3,5kg
79513001	LAULED 130W 220V non-dim IP65	130W	d 300x235	220V	110°	4000K, 5000K, 6000K	3,5kg
79513011	LAULED 130W 220V dimm PWM or 1-10V IP65	130W	d 300x235	220V	110°	4000K, 5000K, 6000K	3,5kg
79515001	LAULED 150W 220V non-dim IP65	150W	d 300x235	220V	110°	4000K, 5000K, 6000K	3,5kg
79515011	LAULED 150W 220V dimm PWM or 1-10V IP65	150W	d 300x235	220V	110°	4000K, 5000K, 6000K	3,5kg
400050	LAULED 45°/70°/90° aluminum reflector	-	388x130/ 435x125	220V	45°, 70°, 90°	-	-
400055	LAULED mat diffuser for the aluminum reflector	-	388x130/ 435x125/ 360x120	220V	-	-	-
400060	LAULED PC reflector	-	360x120	220V	-	-	-
400065	LAULED protective grill grid	-	253x60	220V	-	-	-
400080	LAULED mounting clamp	-	-	220V	-	-	-
400090	LAULED motion sensor	-	-	220V	-	-	-
400095	LAULED converter DALI-PWM	-	-	220V	-	-	-