
MEGRY-G




size

view



1 overall dimensions



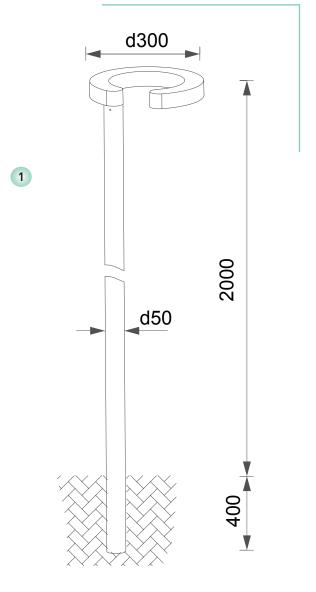











MEGRY-G

LED outdoor lighting 6W and 24W, IP65.

The luminaire has an ergonomic and convenient design, and is suitable for accentual lighting. Suitable for use as outdoor lighting. The driver and the power supply are located inside the housing.

Housing:	Pressure die-cast aluminum alloy with polyester powder paint. Body and glass are fitted with silicone sealants.			
Fasteners:				
Glass:	tempered glass, 3.0 mm			
Optical system:	Optical lens. Efficiency >85%			
Optics with angles:	54°			
Housing color:	Black, Grey, White			
Operating temperature:	-40°C - +45°C (at startup: -20°C)			
Weight:	3.5 kg			
Number of diodes (monochromatic)	12X2W			

Article	Name	Power, W	Dimensions, mm	Beam angle°	Light flow, lm	Color rendering index	Power factor (PF)
69503090	Megry-G 2200 24W 3000K 220V IP65	24 W	300 x 2400	54°	732 lm	81	0,94