

OUTLED NEMA



view




1 OUTLED NEMA S

2 OUTLED NEMA M


3 OUTLED NEMA L




size

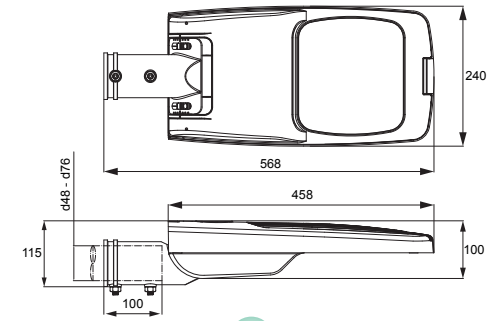

1

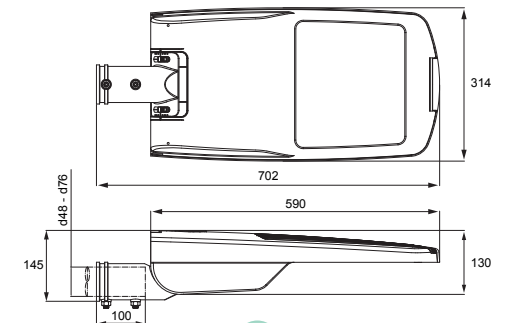

2

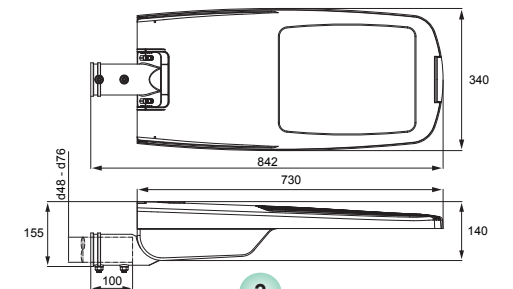

3

OUTLED NEMA

High-power models are designed for lighting large areas or motorways.

Searchlights power up to 215W with NEMA socket are perfect for parks and areas for office centers.

Housing:	Pressure die-cast aluminum alloy with polyester powder paint
Fixation diameter to the support:	d48, d60
Housing color:	Black, Grey, RAL
Beam angle:	40x145°, 1-8 type
IES protection classes:	Class I (SELV)
Color temperature, K:	3000K, 4000K, 5000K
Color rendering index, CRI:	>70
Input voltage, V:	220V
IK:	09
Power factor (PF):	0.9
Ingress Protection Rating, IP:	IP66
Operating temperature:	-40°C ~ +50°C
Guaranteed lifetime, hours:	> 100 000h

Article	Name	Power, W	Dimensions, mm	Input voltage, V	Beam angle, degrees	Color temperature, K	Weight, kg
614040010	OUTLED NEMA S 40W 220V IP66	40W	458x240x100	220V	40x145° (1-8 type)	3000K-5000K	5.2kg
614060010	OUTLED NEMA S 60W 220V IP66	60W	458x240x100	220V	40x145° (1-8 type)	3000K-5000K	5.2kg
614080010	OUTLED NEMA S 80W 220V IP66	80W	458x240x100	220V	40x145° (1-8 type)	3000K-5000K	5.2kg
614100010	OUTLED NEMA M 100W 220V IP66	100W	590x314x130	220V	40x145° (1-8 type)	3000K-5000K	8.3kg
614130010	OUTLED NEMA M 130W 220V IP66	130W	590x314x130	220V	40x145° (1-8 type)	3000K-5000K	8.3kg
614150010	OUTLED NEMA L 150W 220V IP66	150W	730x340x140	220V	40x145° (1-8 type)	3000K-5000K	11kg
614180010	OUTLED NEMA L 180W 220V IP66	180W	730x340x140	220V	40x145° (1-8 type)	3000K-5000K	11kg
614200010	OUTLED NEMA L 200W 220V IP66	200W	730x340x140	220V	40x145° (1-8 type)	3000K-5000K	11kg
614215010	OUTLED NEMA L 215W 220V IP66	215W	730x340x140	220V	40x145° (1-8 type)	3000K-5000K	11kg