


view




- 1 PIX_1
- 2 PIX_2
- 3 PIX_3


size

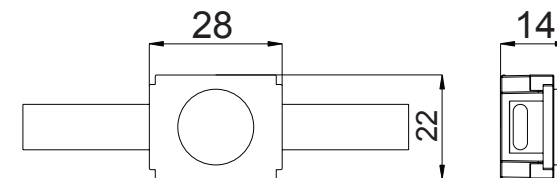

1

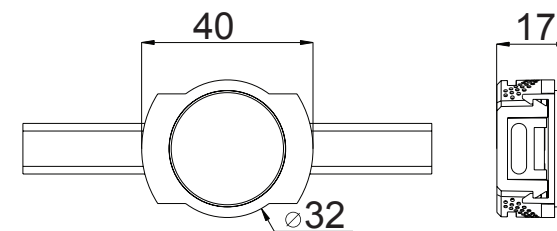

2

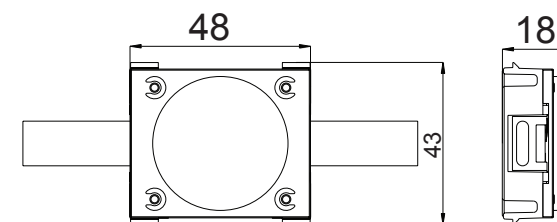

3



PIX

This LED DOT light is perfectly suitable for lighting facades of buildings. A group of this light can be formed in media screen with different resolution dependent on your projects.

Housing:	Pressure die-cast aluminum alloy with polyester powder paint
Housing color:	Black, Grey
Beam angle:	105°
Color temperature, K:	2700K - 5000K, RGB
Input voltage, V:	5V, 15V, 36V
Control system:	DMX-512, Switch On\Off
Ingress Protection Rating, IP:	IP66
Operating temperature:	-40°C ~ +50°C
Guaranteed lifetime, hours:	>50 000h

Article	Name	Power, W	Dimensions, mm	Input voltage, V	Beam angle, degrees	Color temperature, K	Weight, kg
809003010	PIX_1 0.3W 5V IP66 Single Color	0.3W	28x22x14	5V	2700K-5000K	105°	0,01kg
809003020	PIX_1 0.3W 5V IP66 RGB	0.3W	28x22x14	5V	RGB	105°	0,01kg
809009010	PIX_2 0.9W 15V IP66 Single Color	0.9W	32x40x17	15V	2700K-5000K	105°	0,024kg
809009010	PIX_2 0.9W 15V IP66 RGB	0.9W	32x40x17	15V	RGB	105°	0,024kg
809015010	PIX_3 1.5W 15V IP66 Single Color	1.5W	48x43x18	15V, 36V	2700K-5000K	105°	0,035kg
809015010	PIX_3 1.5W 15V IP66 RGB	1.5W	48x43x18	15V, 36V	RGB	105°	0,035kg