

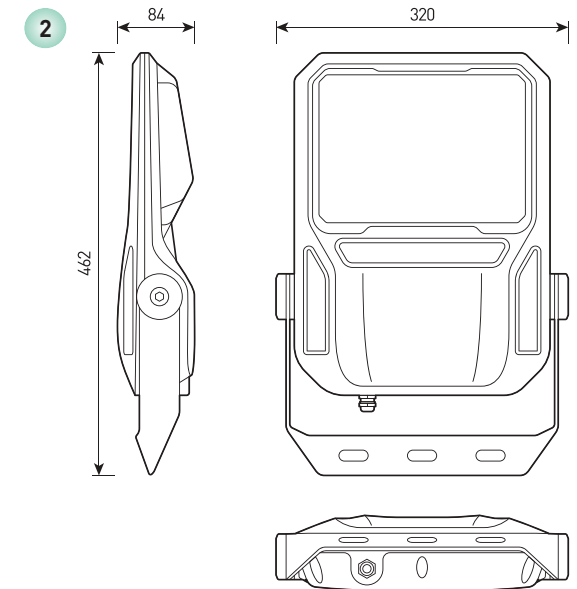


## view

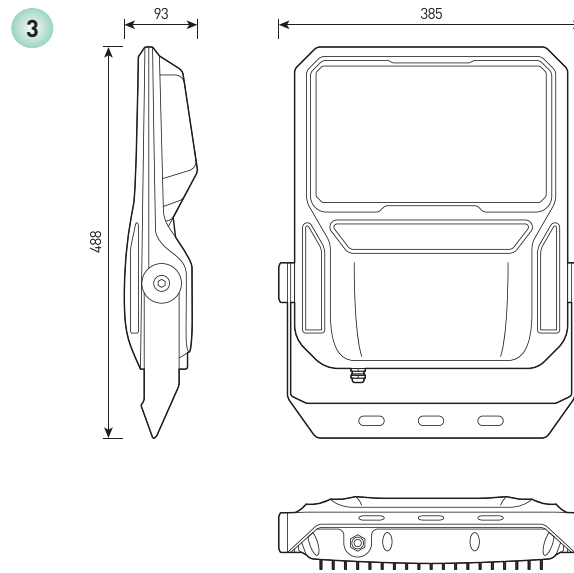

## size

- 1 ADVANTE S
- 2 ADVANTE M
- 3 ADVANTE L

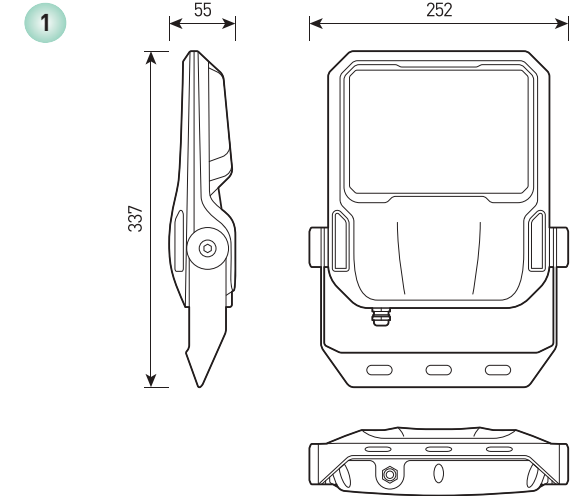

# ADVANTE

Powerful floodlight

<b>Housing:</b>	Pressure die-cast aluminum alloy with polyester powder paint
<b>Beam angle:</b>	30°, 60°, 90°, 45°(Asy), 40x130°, 60x130°
<b>Housing color:</b>	Black, Grey, RAL
<b>IES protection classes:</b>	Class I (SELV)
<b>Color temperature, K:</b>	3000K, 4000K, 5000K, 6000K
<b>Colour rendering index, CRI:</b>	>80
<b>Input voltage, V:</b>	220V
<b>Control system:</b>	On/Off, 1-10V
<b>IK:</b>	09
<b>Power Factor:</b>	>0.90
<b>Ingress Protection Rating, IP:</b>	IP66
<b>Operating temperature:</b>	-40°C ~ +55°C
<b>Weight, kg:</b>	2.16 - 6.33 kg

Article	Name	Power, W	Dimensions, mm	Input voltage, V	Beam angle, degrees	Color temperature, K	Weight, kg
614215105	ADVANTE S 50W 220V IP66 SINGLE COLOR	50W	252.6x337x55.2	220V	30°, 60°, 90°, 45°(Asy)	3000K, 4000K, 5000K, 6000K	2,16
614215110	ADVANTE S 75W 220V IP66 SINGLE COLOR	75W	252.6x337x55.2	220V	30°, 60°, 90°, 45°(Asy)	3000K, 4000K, 5000K, 6000K	2,16
614215115	ADVANTE S 100W 220V IP66 SINGLE COLOR	100W	252.6x337x55.2	220V	30°, 60°, 90°, 45°(Asy)	3000K, 4000K, 5000K, 6000K	2,16
614215120	ADVANTE M 150W 220V IP66 SINGLE COLOR	150W	320.3x462.6x84.6	220V	30°, 60°, 90°, 45°(Asy), 40x130°, 60x130°	3000K, 4000K, 5000K, 6000K	4,75
614215125	ADVANTE M 180W 220V IP66 SINGLE COLOR	180W	320.3x462.6x84.6	220V	30°, 60°, 90°, 45°(Asy), 40x130°, 60x130°	3000K, 4000K, 5000K, 6000K	4,75
614215130	ADVANTE L 240W 220V IP66 SINGLE COLOR	240W	385.4x487.6x93.4	220V	30°, 60°, 90°, 45°(Asy), 40x130°, 60x130°	3000K, 4000K, 5000K, 6000K	6,33
614215135	ADVANTE L 280W 220V IP66 SINGLE COLOR	280W	385.4x487.6x93.4	220V	30°, 60°, 90°, 45°(Asy), 40x130°, 60x130°	3000K, 4000K, 5000K, 6000K	6,33