

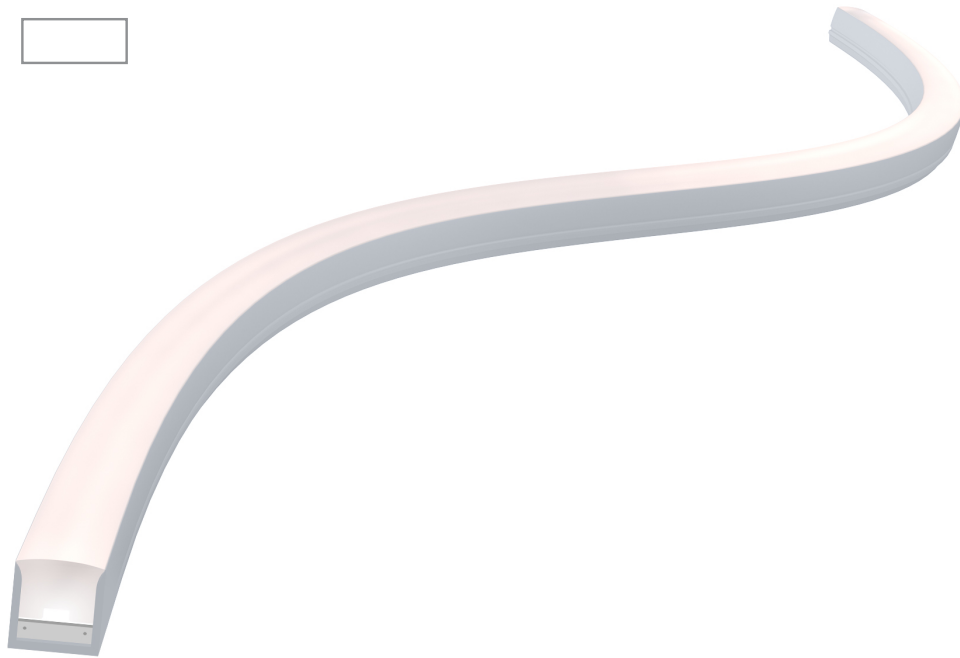



view




size




Cable entry



Straight




Side



Lower

accessories

Stainless flexible mounting channel



AGIVA 3D

Flexible linear luminaire for architectural accent lightin

Housing:	Sealed molded silicone housing
Housing color:	White
Minimal cutting length:	83.3 mm
Maximum length:	8 m - SINGLE, 4 m - RGBW
Bend diameter:	250 mm
Beam angle:	120°
Color temperature:	2700K, 3000K, 4000K, 5000K, 6500K, Red, Green, Blue, RGBW
Control system:	On/Off, PWM, 1-10V, DMX-512, DALI
Color rendering index:	CRI >80
Input voltage:	24 V
IES protection classes:	Class III (SELV)
Protection Rating:	IP68
Operating temperature:	−40°C ~ +50°C
Weight:	0.45 kg

Article	Name	Power	Dimensions, mm	Input voltage	Beam angle	Color temperature	Weight, kg
911026096	AGIVA 3D 1000mm 13W 24V IP68 SINGLE COLOR	13 W/m	1000×17×18	24 V	120°	2700K, 3000K, 4000K, 5000K, 6500K, Red, Green, Blue	0.45
911026098	AGIVA 3D 1000mm 20W 24V IP68 RGBW DMX-512 12segm	20 W/m	1000×17×18	24 V	120°	RGBW	0.45
911026042	STAINLESS FLEXIBLE MOUNTING CHANNEL						
911026046	CONNECTOR IP68						
911026049	AGIVA ENDCAP SILICONE						
911026045	AGIVA ENDCAP KIT IP66						