

AMANTA SPOT




view




size

1 AMANTA SPOT (S)

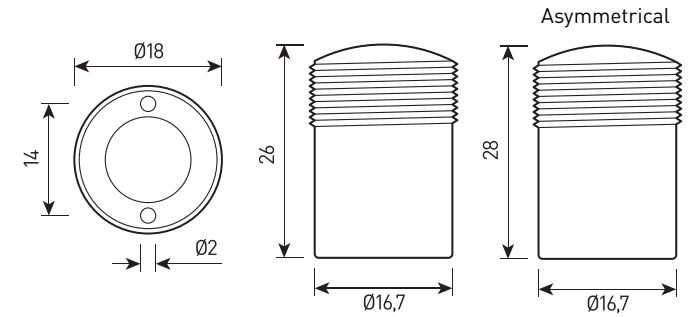

2 AMANTA SPOT (M)

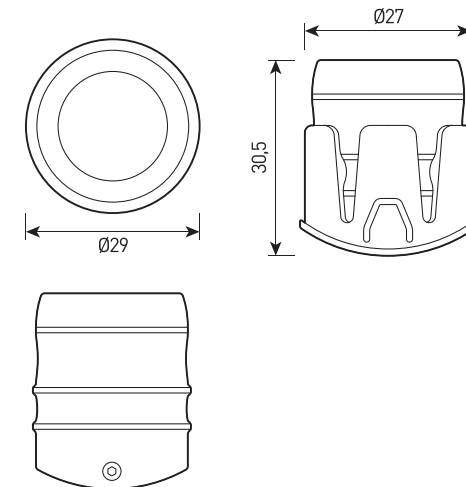

AMANTA SPOT

Railing recessed luminaire

Housing:	Sealed cast housing
Housing color:	Metallic
Beam angle:	26°, 30°, 60°, Asy 50°, Asy 70°
Color temperature:	2700K, 3000K, 4000K, Red, Green, Blue, RGBW, RGB
Control system:	On/Off, DMX-512
Input voltage:	12 V, 24 V
IES protection classes:	Class III (SELV)
Protection Rating:	IP67
Operating temperature:	−40°C ~ +50°C
Weight:	0.1 – 0.2 kg

Article	Name	Power	Dimensions, mm	Input voltage	Beam angle	Color temperature	Weight, kg
692200010	AMANTA SPOT (S) 1.2W IP67	1.2 W	Ø18×26	12 V, 24 V	30°, 60°	2700K, 3000K, 4000K, Red, Green, Blue	0.1
692200014	AMANTA SPOT (S) 1.2W IP67 Asy	1.2 W	Ø18×28	12 V, 24 V	Asy 50°	2700K, 3000K, 4000K, Red, Green, Blue	0.1
692200016	AMANTA SPOT (M) 1.5W IP67	1.5 W	Ø29×30.5	12 V, 24 V	60°	2700K, 3000K, 4000K, Red, Green, Blue	0.2
692200018	AMANTA SPOT (M) 1.5W RGBW IP67	1.5 W	Ø29×30.5	12 V, 24 V	26°, 60°	RGBW	0.2
692200020	AMANTA SPOT (M) 2W RGB DMX-512 IP67	2 W	Ø29×30.5	12 V, 24 V	60°, Asy 70°	RGB	0.2