


## view



RAL



## size

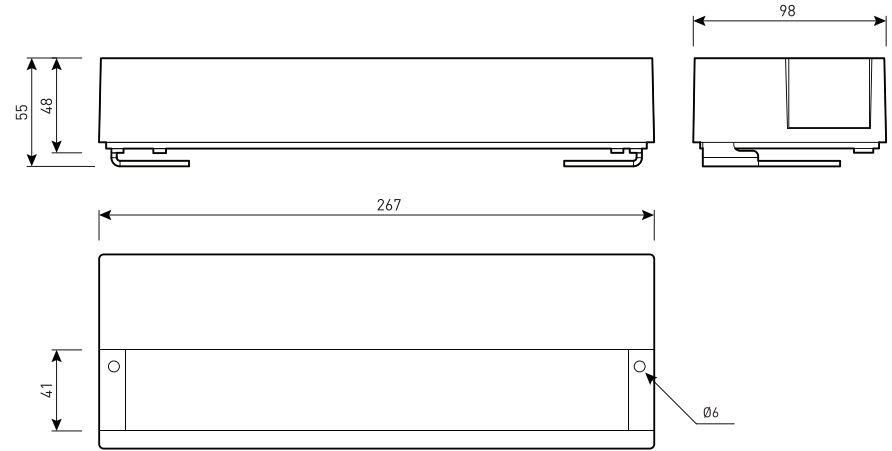

# AZURE

LED luminaire for architectural lighting of window openings and creating a decorative effect

<b>Housing:</b>	Pressure die-cast aluminum with polyester powder paint
<b>Beam angle:</b>	6°x180°
<b>Housing color:</b>	Grey, RAL
<b>IES protection classes:</b>	Class I (SELV)
<b>Color temperature:</b>	2700K, 3000K, 4000K, 5000K, 6000K, R, G, B, RGB, RGBW
<b>Input voltage:</b>	24V, 220 V
<b>Control system:</b>	DMX-512
<b>Ingress Protection Rating, IP:</b>	IP66
<b>Operating temperature:</b>	-40°C ~ +50°C
<b>Weight:</b>	2.2 kg

Article	Name	Power	Dimensions	Input voltage	Beam angle	Color temperature	Weight, kg
815012020	AZURE 36W Single color 24V IP66	36W	282x98x55	24V, 220V	6°x180°	2700K, 3000K, 4000K, 5000K, 6000K, R, G, B	2.2
815012022	AZURE 36W RGBW DMX-512 24V IP66	36W	282x98x55	24V	6°x180°	RGBW	2.2