

BELMOR

USER MANUAL



The luminaire shall be installed by a qualified electrician and wired in accordance with the latest IEE electrical regulations or the national requirements.


Installation Instructions

Housing:	Pressure die-cast aluminum alloy with polyester powder paint
Housing Color:	Metallic
Beam Angle:	8°, 15°, 30°, 40°, 60°
Color Temperature:	2700K, 3000K, 4000K, 5000K, 6000K, RGB, RGBW
Control System:	On/Off, DMX-512
Input Voltage:	24 V, 220 V
Protection Class:	Class I, Class III
Protection Rating:	IP67
Weight:	0.8 – 4.5 kg


Installation Instructions

1. Connect the power cable through the mounting hole using the connector.
2. Adjust the angle of the luminaire matrix.
3. Install the luminaire into the mounting hole.


1

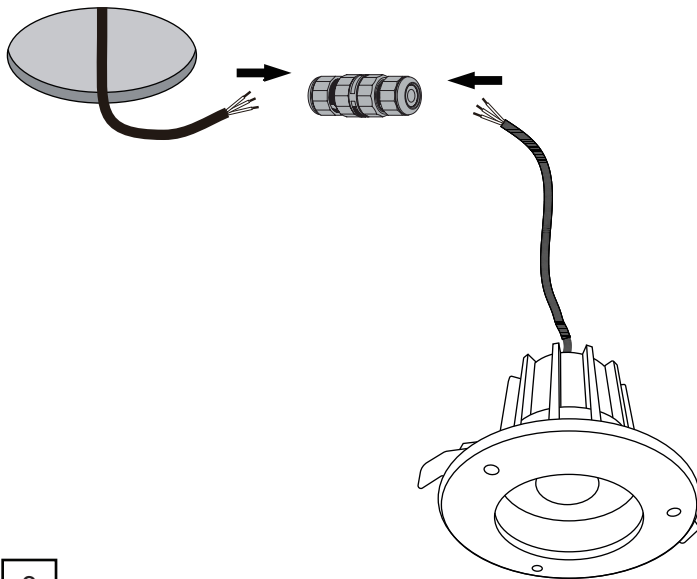

2

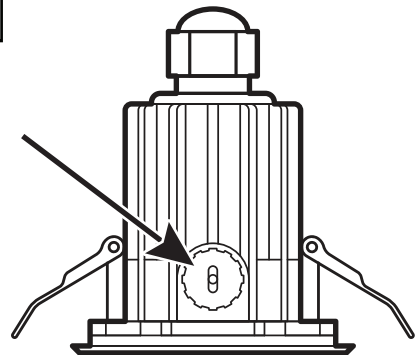


3

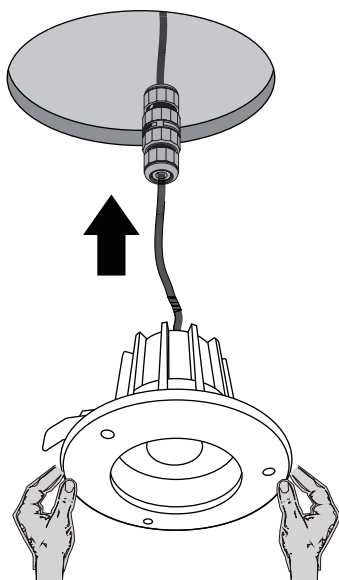


Installation Instructions

Connection diagram


24V DC

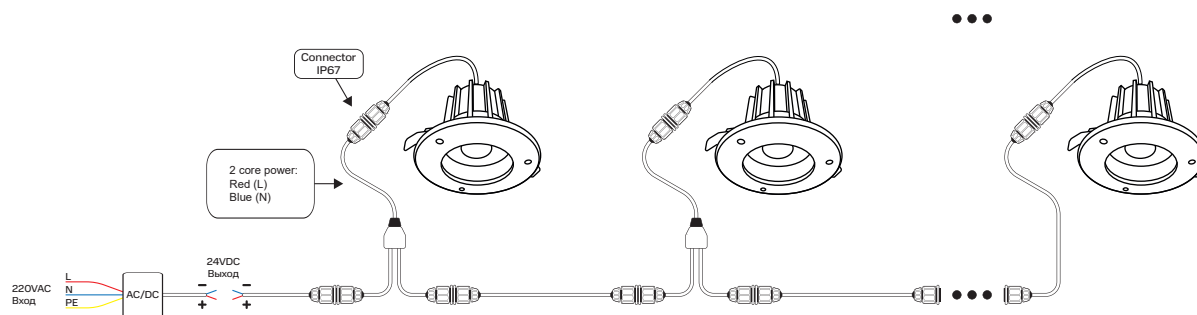


220V AC

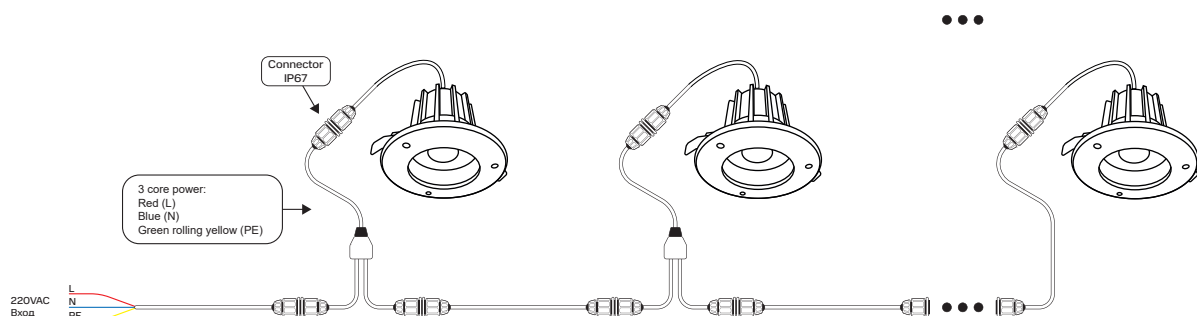


24V DC DMX-512

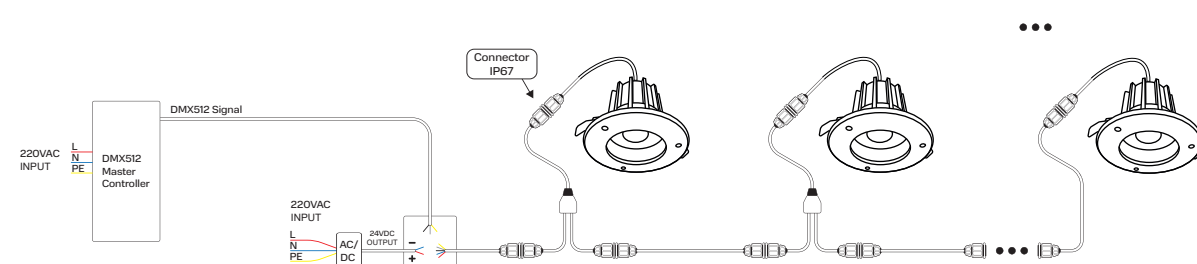


Overall dimensions




BELMOR XS

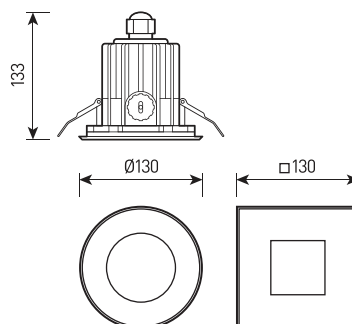


BELMOR S

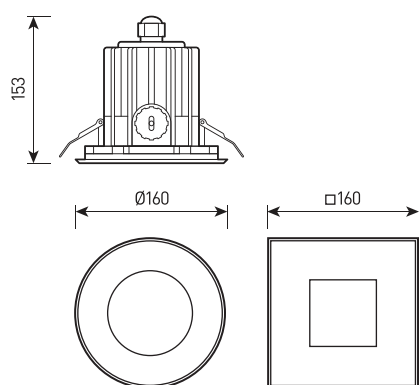


BELMOR M

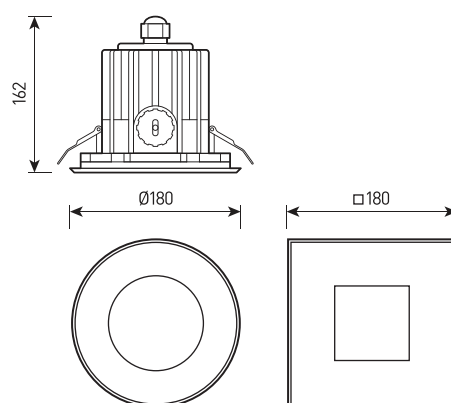

BELMOR L

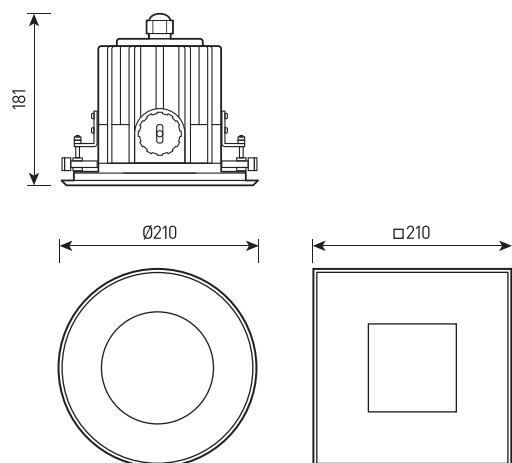

BELMOR XL

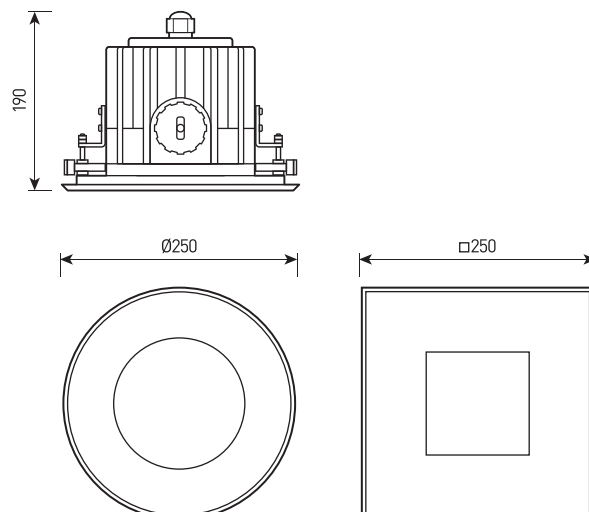

BELMOR XXL