

BLADER L




view





RAL

1 overall dimensions

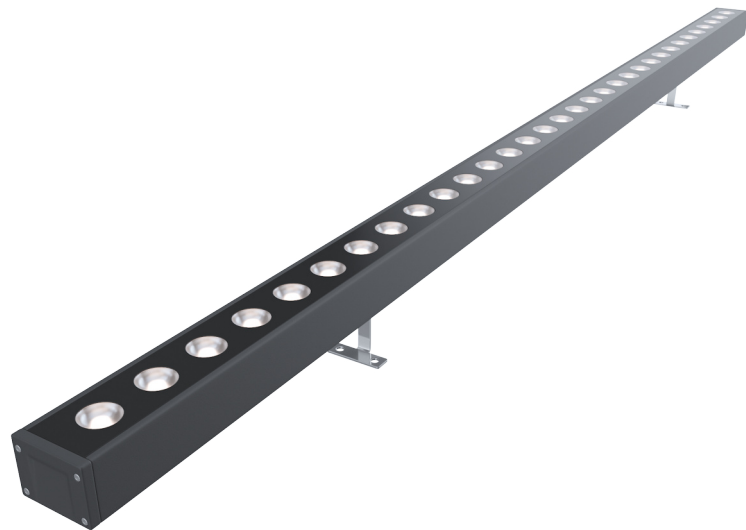

size

1

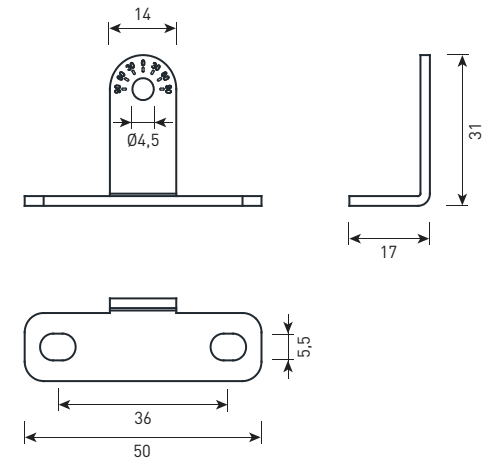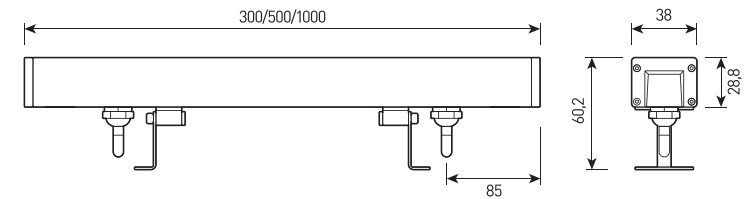

BLADER L

Ultra-thin linear luminaire for architectural lighting.

Housing:	Extruded aluminum with a protective anti-corrosion coating
Housing color:	Black,Grey, RAL
Beam angle:	7°, 15°, 30°, 45°, 60°, 15°x60°, 20x40°, 120°
IES protection classes:	Class III (SELV)
Color temperature, K:	2700K, 3000K, 4000K, 5700K, R, G, B, RGB 3in1, RGBW 4in1
Input voltage, V:	24V
Control system:	On/Off, DMX-512
Ingress Protection Rating, IP:	IP66
Operating temperature:	-40°C ~ +50°C
Weight:	0,8-2,0kg

Article	Name	Power, W	Dimensions, mm	Input voltage, V	Beam angle, degrees	Color temperature, K	Weight, kg
744080040	BLADER L 16W 300mm 24V IP66 SINGLE COLOR	16W	300x38x28.8	24V	7°, 15°, 30°, 45°, 60°, 15°x60°, 20x40°, 120°	2700K, 3000K, 4000K, 5700K, R, G, B	0,8
744080042	BLADER L 12W 300mm 24V DMX RGB 3in1 IP66	12W	300x38x28.8	24V	15°, 30°, 45°, 15°x60°, 20x40°, 120°	RGB	0,8
744080044	BLADER L 16W 300mm 24V DMX RGBW 4in1 IP66	16W	300x38x28.8	24V	15°, 30°, 45°, 15°x60°, 20x40°, 120°	RGBW	0,8
744080046	BLADER L 24W 500mm 24V IP66 SINGLE COLOR	24W	500x38x28.8	24V	7°, 15°, 30°, 45°, 60°, 15°x60°, 20x40°, 120°	2700K, 3000K, 4000K, 5700K, R, G, B	1,4
744080048	BLADER L 18W 500mm 24V DMX RGB 3in1 4segm IP66	18W	500x38x28.8	24V	15°, 30°, 45°, 15°x60°, 20x40°, 120°	RGB	1,4
744080050	BLADER L 24W 500mm 24V DMX RGBW 4in1 4segm IP66	24W	500x38x28.8	24V	15°, 30°, 45°, 15°x60°, 20x40°, 120°	RGBW	1,4
744080052	BLADER L 48W 1000mm 24V IP66 SINGLE COLOR	48W	1000x38x28.8	24V	7°, 15°, 30°, 45°, 60°, 15°x60°, 20x40°, 120°	2700K, 3000K, 4000K, 5700K, R, G, B	2,0
744080054	BLADER L 36W 1000mm 24V DMX RGB 3in1 8segm IP66	36W	1000x38x28.8	24V	15°, 30°, 45°, 15°x60°, 20x40°, 120°	RGB	2,0
744080056	BLADER L 48W 1000mm 24V DMX RGBW 4in1 8segm IP66	48W	1000x38x28.8	24V	15°, 30°, 45°, 15°x60°, 20x40°, 120°	RGBW	2,0