

view




RAL



1 BRONTO S

2 BRONTO M

size

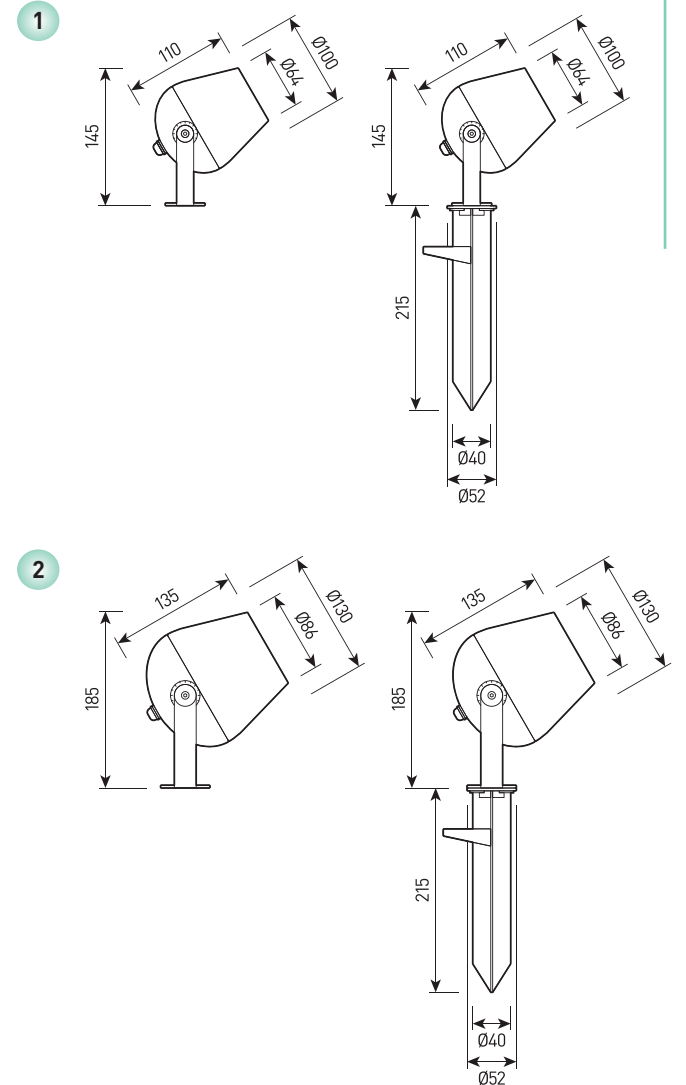

BRONTO

Multifunctional mini-spotlight

Housing:	Pressure die-cast aluminum with polyester powder paint
Beam angle:	24°, 30°, 40°, 60°, 25°x45°, 30°x60°
Housing color:	Grey, RAL
IES protection classes:	Class I (SELV)
Color temperature:	2700K, 3000K, 4000K, 5000K
Input voltage:	24V, 220V
Control system:	On/Off
Ingress Protection Rating, IP:	IP66
Operating temperature:	-40°C ~ +50°C
Weight:	0.8–1.5 kg

Article	Name	Power	Dimensions, mm	Input voltage	Beam angle	Color temperature	Weight, kg
622201210	BRONTO S 10.5W SINGLE 24V/220V IP66	10,5W	D64x110	24V, 220V	24°, 30°, 40°, 60°, 25°x45°, 30°x60°	2700K, 3000K, 4000K, 5000K	0.8
622201212	BRONTO M 14.5W SINGLE 24V/220V IP66	14,5W	D86x135	24V, 220V	24°, 30°, 40°, 60°, 25°x45°, 30°x60°	2700K, 3000K, 4000K, 5000K	1.5