


view



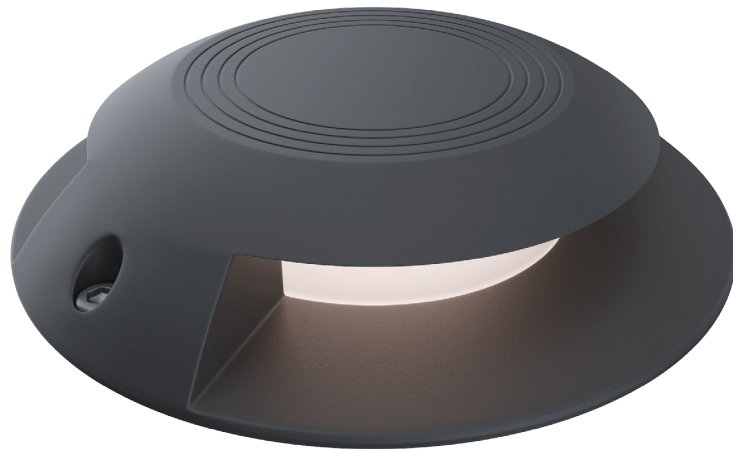


1 BRUSTER S

2 BRUSTER M

2 BRUSTER L

size

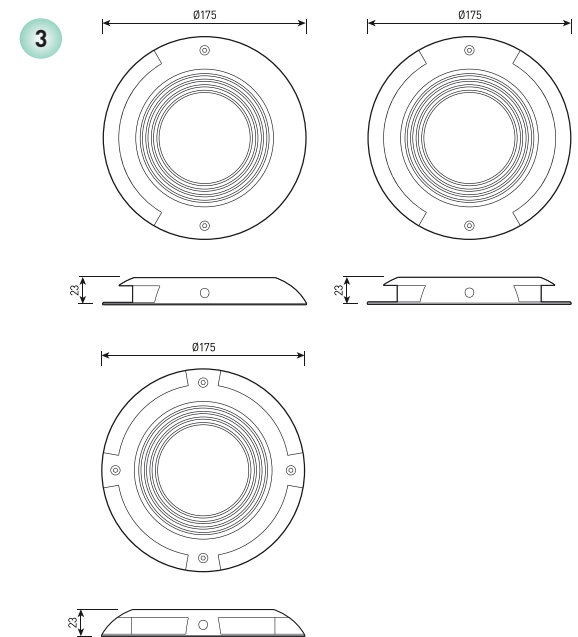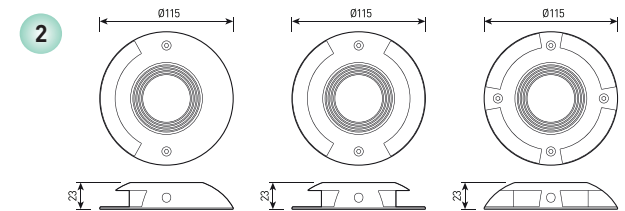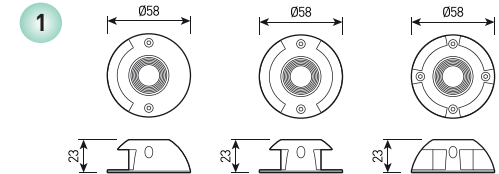

BRUSTER

LED luminaire for landscape lighting

Housing:	Pressure die-cast aluminum with protective anti-corrosion coating
Beam angle:	120°, 2x120°, 4x70°
Housing color:	Metallic
IES protection classes:	Class I (SELV)
Color temperature:	2700K, 3000K, 4000K, 5000K, 5700K
Input voltage:	24V
Control system:	On/Off
Ingress Protection Rating, IP:	IP67
Operating temperature:	-40°C ~ +50°C
Weight:	1.1–2.8 kg

Article	Name	Power	Dimensions, mm	Input voltage	Beam angle	Color temperature	Weight, kg
793088170	BRUSTER S 1x120D SINGLE 24V IP67	2.1W	D58x23	24V	120°	2700K, 3000K, 4000K, 5000K, 5700K	1,1
793088172	BRUSTER S 2x120D SINGLE 24V IP67	2.1W	D58x23	24V	2x120°	2700K, 3000K, 4000K, 5000K, 5700K	1,1
793088174	BRUSTER S 4x70D SINGLE 24V IP67	2.1W	D58x23	24V	4x70°	2700K, 3000K, 4000K, 5000K, 5700K	1,1
793088176	BRUSTER M 1x120D SINGLE 24V IP67	3.1W	D115x23	24V	120°	2700K, 3000K, 4000K, 5000K, 5700K	1,9
793088178	BRUSTER M 2x120D SINGLE 24V IP67	3.1W	D115x23	24V	2x120°	2700K, 3000K, 4000K, 5000K, 5700K	1,9
793088180	BRUSTER M 4x70D SINGLE 24V IP67	3.1W	D115x23	24V	4x70°	2700K, 3000K, 4000K, 5000K, 5700K	1,9
793088182	BRUSTER L 1x120D SINGLE 24V IP67	4.5W	D175x23	24V	120°	2700K, 3000K, 4000K, 5000K, 5700K	2,8
793088184	BRUSTER L 2x120D SINGLE 24V IP67	4.5W	D175x23	24V	2x120°	2700K, 3000K, 4000K, 5000K, 5700K	2,8
793088186	BRUSTER L 4x70D SINGLE 24V IP67	4.5W	D175x23	24V	4x70°	2700K, 3000K, 4000K, 5000K, 5700K	2,8