

view




1 CROW S

2 CROW M


3 CROW L

size


1

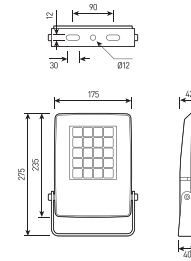

2

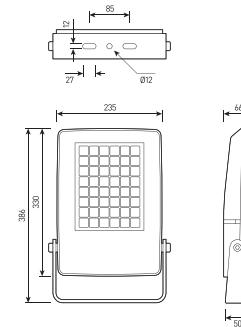

3

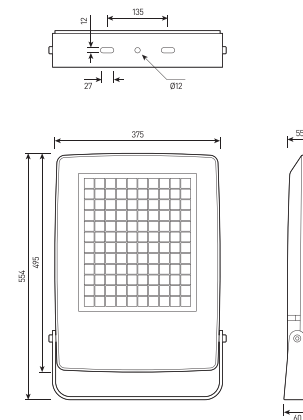

CROW

Multifunctional projector for architectural lighting.
Multichip 4-in-1 RGB+W, Tunable White with DMX-512 control.

Housing:	Pressure die-cast aluminum alloy with polyester powder paint. The body and glass have silicone seals.
Housing color:	Black, Grey, RAL
Beam angle:	8°, 12.5°, 20°, 30°, 48°, 60°, 15X30°, 10X60°, 120x70°(Asy)
IES protection classes:	Class I (SELV)
Color temperature, K:	2700K, 3000K, 4000K, 5000K, 6000K, R, G, B, RGBW 4in1
Input voltage, V:	24V, 36V, 220V
Control system:	On/Off, 1-10V, DMX-512, DALI
Ingress Protection Rating, IP:	IP66
Operating temperature:	-40°C ~ +50°C
Weight:	2-12 kg

Article	Name	Power, W	Dimensions, mm	Input voltage, V	Beam angle, degrees	Color temperature, K	Weight, kg
622200150	CROW S 22W 24V/220V IP66 Single color	22W	275x175x42	24V/220V	8°, 12.5°, 20°, 30°, 48°, 60°, 15X30°, 10X60°	2700K, 3000K, 4000K, 5000K, 6000K, R, G, B	2,0
622200152	CROW S 36W 24V/220V IP66 Single color	36W	275x175x42	24V/220V	8°, 12.5°, 20°, 30°, 48°, 60°, 15X30°, 10X60°	2700K, 3000K, 4000K, 5000K, 6000K, R, G, B	2,0
622200154	CROW S 30W 24V/220V IP66 Single color	30W	275x175x42	24V/220V	120x70°(Asy)	2700K, 3000K, 4000K, 5000K, 6000K, R, G, B	2,0
622200156	CROW S 30W 24V RGBW 4in1 IP66	30W	275x175x42	24V	8°, 12.5°, 20°, 30°, 48°, 60°, 15X30°, 10X60°	RGBW	2,0
622200158	CROW M 60W 36V/220V IP66 Single color	60W	386x235x66	36V/220V	8°, 12.5°, 20°, 30°, 48°, 60°, 15X30°, 10X60°	2700K, 3000K, 4000K, 5000K, 6000K, R, G, B	5,0
622200160	CROW M 100W 36V/220V IP66 Single color	100W	386x235x66	36V/220V	8°, 12.5°, 20°, 30°, 48°, 60°, 15X30°, 10X60°	2700K, 3000K, 4000K, 5000K, 6000K, R, G, B	5,0
622200162	CROW M 60W 36V/220V IP66 Single color	60W	386x235x66	36V/220V	120x70°(Asy)	2700K, 3000K, 4000K, 5000K, 6000K, R, G, B	5,0
622200164	CROW M 60W 36V RGBW 4in1 IP66	60W	386x235x66	36V	8°, 12.5°, 20°, 30°, 48°, 60°, 15X30°, 10X60°	RGBW	5,0
622200166	CROW L 150W 36V/220V IP66 Single color	150W	554x374x55	36V/220V	8°, 12.5°, 20°, 30°, 48°, 60°, 15X30°, 10X60°	2700K, 3000K, 4000K, 5000K, 6000K, R, G, B	12,0
622200168	CROW L 185W 36V/220V IP66 Single color	185W	554x374x55	36V/220V	8°, 12.5°, 20°, 30°, 48°, 60°, 15X30°, 10X60°	2700K, 3000K, 4000K, 5000K, 6000K, R, G, B	12,0
622200170	CROW L 185W 36V RGBW4in1 IP66	185W	554x374x55	36V	8°, 12.5°, 20°, 30°, 48°, 60°, 15X30°, 10X60°	RGBW	12,0
622200172	CROW L 225W 36V/220V IP66 Single color	225W	554x374x55	36V/220V	8°, 12.5°, 20°, 30°, 48°, 60°, 15X30°, 10X60°	2700K, 3000K, 4000K, 5000K, 6000K, R, G, B	12,0
622200174	CROW L 225W 36V RGBW4in1 IP66	225W	554x374x55	36V	8°, 12.5°, 20°, 30°, 48°, 60°, 15X30°, 10X60°	RGBW	12,0