

view




size

1 DANBAR S




1




2 DANBAR M




2



3 DANBAR L

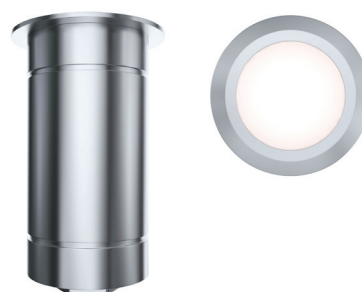

3

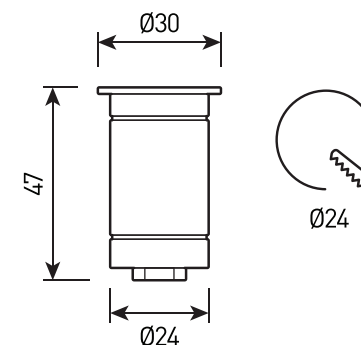

DANBAR

Recessed lighting

Housing:	Pressure die-cast aluminum with polyester powder paint
Beam angle:	120°
Housing color:	Grey
IES protection classes:	Class III (SELV)
Color temperature:	2700K, 3000K, 4000K
Input voltage:	12 V
Control system:	On/Off
Ingress Protection Rating, IP:	IP67
Operating temperature:	-40°C ~ +50°C
Weight:	0.1–0.3 kg

Article	Name	Power, W	Dimensions, mm	Input voltage, V	Beam angle, degrees	Color temperature, K	Weight, kg
825030338	DANBAR S 0,2W 12V IP67 Single color	0,2	D10x40	12V	120°	2700K, 3000K, 4000K	0.1
825030340	DANBAR M 0,5W 12V IP67 Single color	0,5	D20x40	12V	120°	2700K, 3000K, 4000K	0.2
825030342	DANBAR L 1W 12V IP67 Single color	1	D30x47	12V	120°	2700K, 3000K, 4000K	0.3