


view




RAL



1 ECLIPSE-G 220

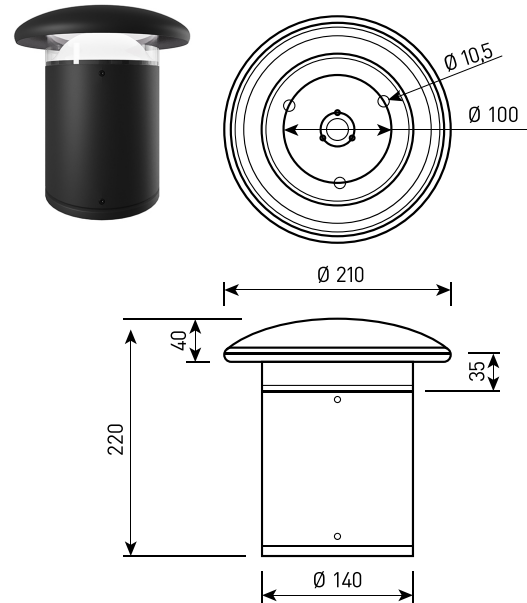

2 ECLIPSE-G 1000

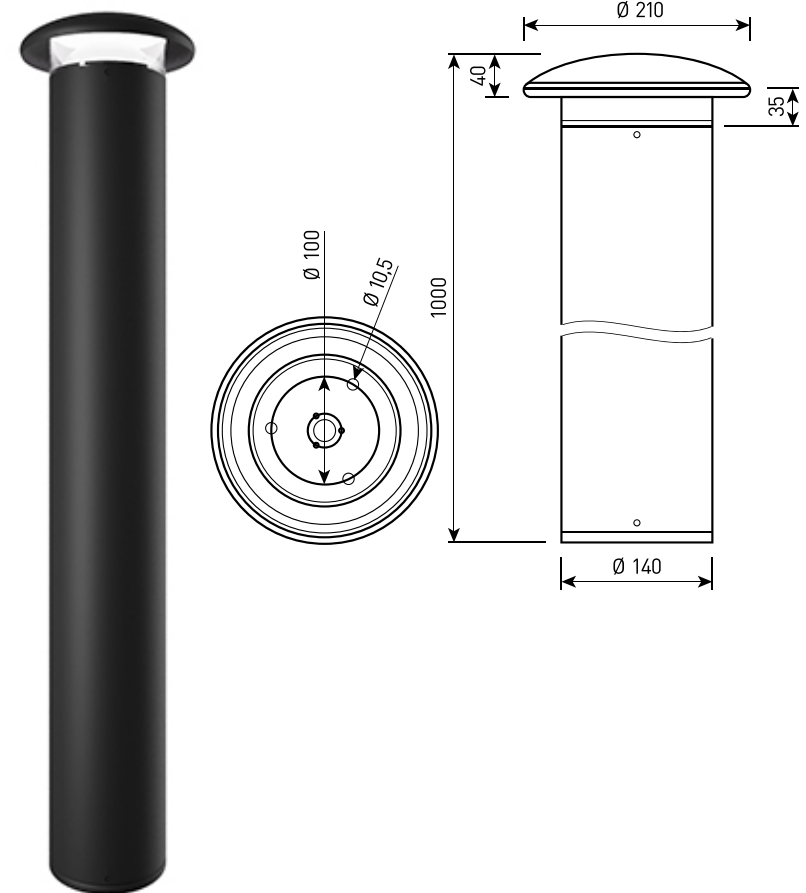

size

ECLIPSE-G

Outdoor LED lighting.

The luminaire has an ergonomic and convenient design, and is suitable for accentual lighting.

Suitable for use as outdoor lighting. The driver and the power supply are located inside the housing.

Housing:	Pressure die-cast aluminum alloy with polyester powder paint
Housing color:	Black, Grey, RAL
Beam angle:	53°
Color temperature:	3000K, 4000K, 5000K, 6000K
Control system:	On/Off
Input voltage:	220 V
IES protection classes:	Class I
Protection Rating:	IP65
Operating temperature:	-40°C ~ +50°C
Weight:	1.4 – 4.5 kg

Article	Name	Power	Dimensions, mm	Input voltage	Beam angle	Color temperature	Weight, kg
69503040	ECLIPSE-G 220 12W 220V IP65	12 W	Ø210x220	220 V	53°	3000K, 4000K, 5000K, 6000K	1.4
69503051	ECLIPSE-G 1000 12W 220V IP65	12 W	Ø210x1000	220 V	53°	3000K, 4000K, 5000K, 6000K	4.5