

FORWARD

USER MANUAL





The luminaire shall be installed by a qualified electrician and wired in accordance with the latest IEE electrical regulations or the national requirements.



Installation Instructions

A. Technical Parameters

Product name	FORWARD
Product code	614
Input Voltage	AC 220V
Power	320-1800W
Power Factor	>0.9
Beam Angle	12°, 16°, 30°, 60°, 60x130°, 40x130°, 25x130°
Color temperature	SINGLE COLOR
Colour rendering index	>80 CRI
Working Environment	-40°C to +55°C
Dimensions	568×492×229 mm, 712×492×224 mm, 656×765×138 mm, 803×765×138 mm, 673×791×138 mm, 817×977×138 mm
Net weight	19.0 - 51.0 Kg
Control Mode	On/Off, 1-10V

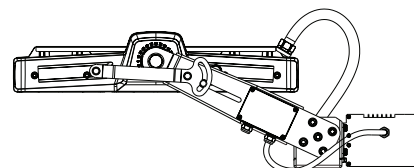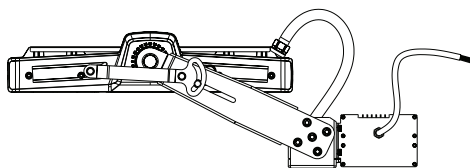




Wiring method

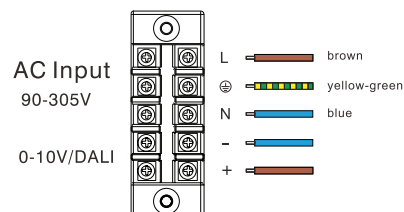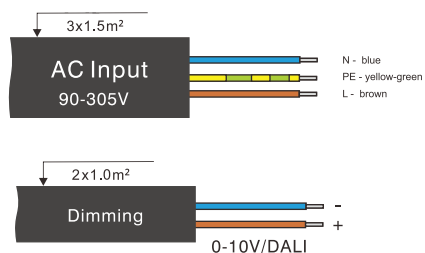

DANGER OF ELECTRICAL SHOCK!
Please cut off the power before the maintenance.


When there are only three bits for the wiring terminal, the corresponding "L", "Yellow-green", and "N" mark the wiring.

Installation Instructions

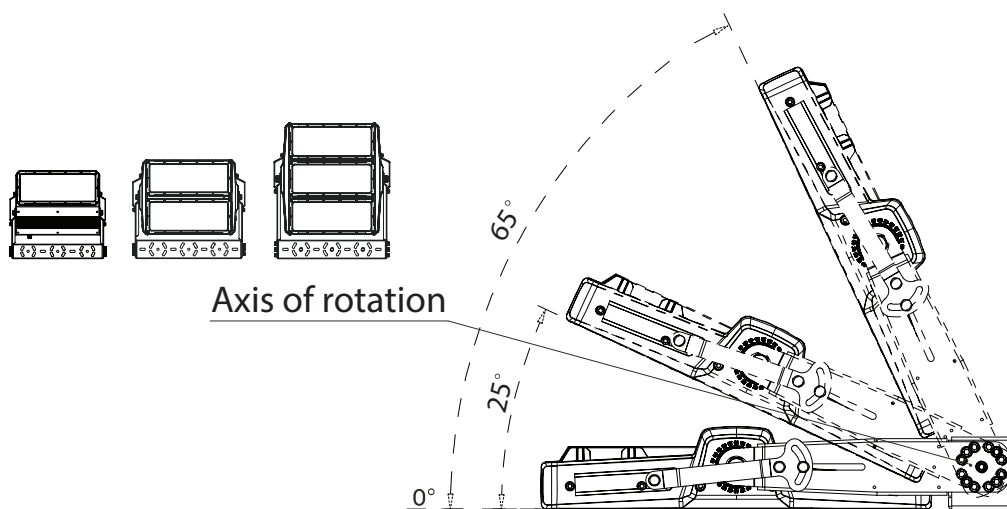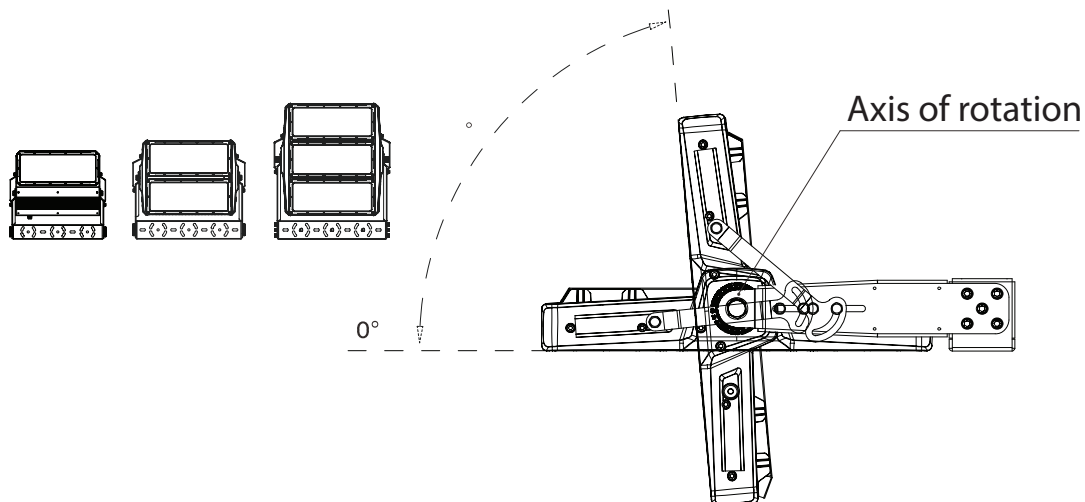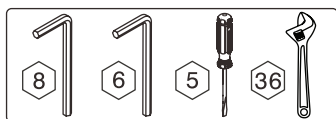



 The angle of rotation relative to its horizontal axis is 0° to 85°.

Unit: mm

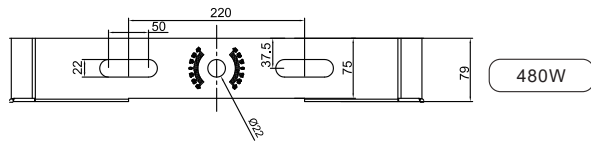



480W

1 Modules system

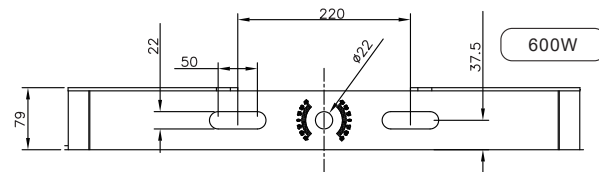


600W

2 Modules system

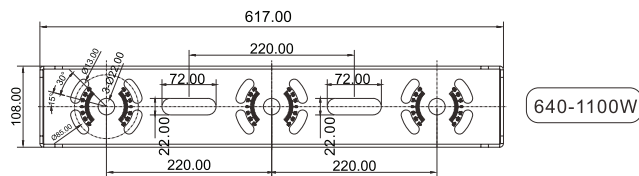
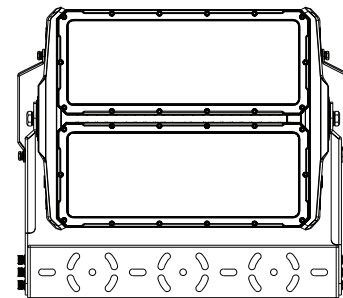


640-1100W

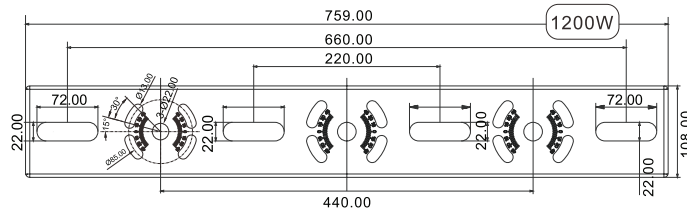


1200W

3 Modules system

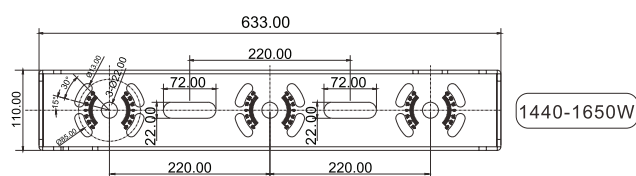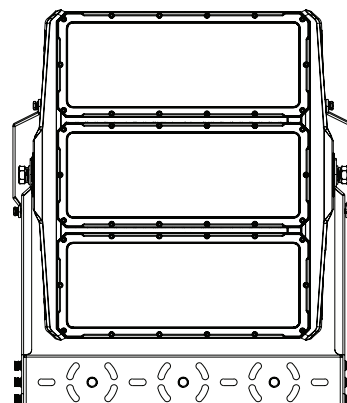

1440-1650W

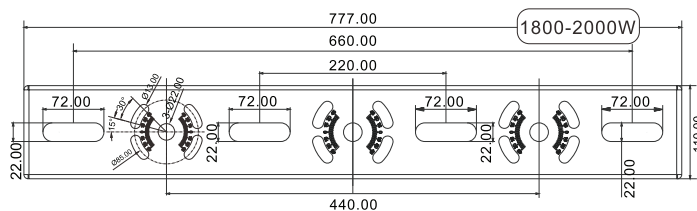

1800-2000W

Scale interval

Used for accurate positioning when installing lamps.