

GARNET GLOW L



view



RAL




1 overall dimensions



size

1

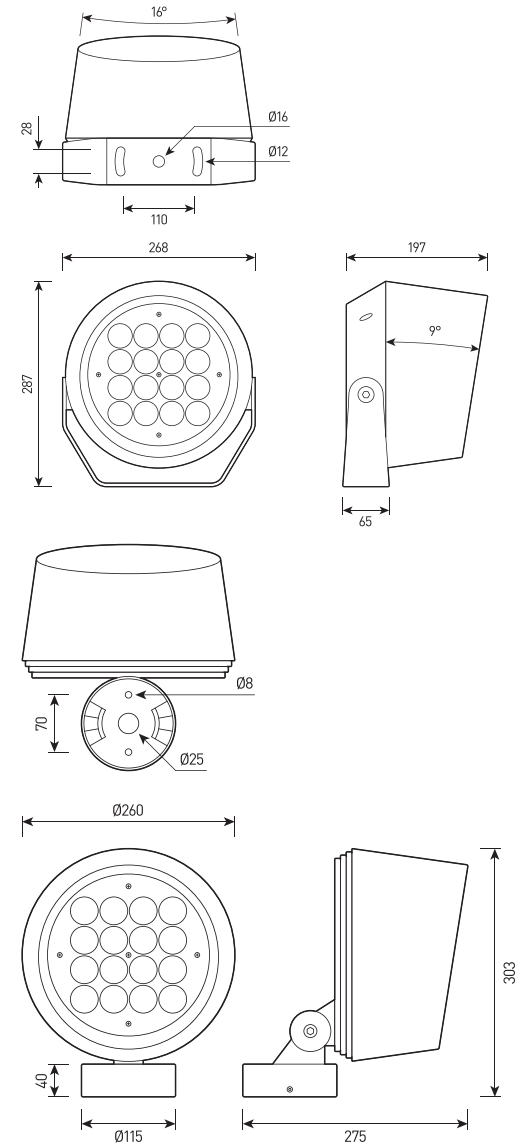

GARNET GLOW L

Multifunctional spotlight for architectural lighting. Multichip 4-in-1 RGB+W Tunable White with DMX-512 operated, mounting version: on surface, to pillar

Housing:	Pressure die-cast aluminum alloy with polyester powder paint. Body and glass are fitted with silicone gaskets.
Fasteners:	Stainless steel, T=2.00mm
Beam angle:	2.6°, 3.5°, 12°, 15°, 20°, 30°, 60°, 10x70°, 5x20°, 15x60°
Housing color:	Black, Grey, RAL
IES protection classes:	Class I (SELV)
Color temperature, K:	2700K, 3000K, 4000K, 5000K, R, G, B, RGBW 4in1, Tunable white
Input voltage, V:	36V, 220V
Control system:	On/Off, 1-10V, DMX-512, DALI
Ingress Protection Rating, IP:	IP66
Operating temperature:	-40°C ~ +50°C
Weight, kg:	6.0 kg

Article	Name	Power, W	Dimensions, mm	Input voltage, V	Beam angle, degrees	Color temperature, K	Weight, kg
622060010	GARNET GLOW L 60W 100V-264V IP66 Single Color	60W	268x287x197	220V	2.6°, 3.5°, 12°, 20°, 30°, 60°, 10x70, 5x20	2700K, 3000K, 4000K, 5000K, R, G, B	6.0
622060020	GARNET GLOW L 60W DC36V-AC100-264V RGBW 4in1 IP66	60W	268x287x197	36V, 220V	15°, 20°, 30°, 15x60	RGBW	6.0
622060025	GARNET GLOW L TW 60W DC36V-AC100-264V IP66 DMX Tunable white 1800K - 6000K	60W	268x287x197	36V, 220V	2.6°, 3.5°, 12°, 20°, 30°, 60°, 10x70, 5x20	1800K-6000K Tunable white	6.0
622090010	GARNET GLOW L 75W DC36V-AC100-264V IP66 Single Color	75W	268x287x197	36V, 220V	2.6°, 3.5°, 12°, 20°, 30°, 60°, 10x70, 5x20	2700K, 3000K, 4000K, 5000K, R, G, B	6.0
622090020	GARNET GLOW L 75W DC36V-AC100-264V RGBW 4in1 IP66	75W	268x287x197	36V, 220V	15°, 20°, 30°, 15x60	RGBW	6.0
622090025	GARNET GLOW L TW 75W DC36V-AC100-264V IP66 DMX Tunable white 1800K - 6000K	75W	268x287x197	36V, 220V	2.6°, 3.5°, 12°, 20°, 30°, 60°, 10x70, 5x20	1800K-6000K Tunable white	6.0