

GARNET GLOW S



view




RAL




size


1 bracket

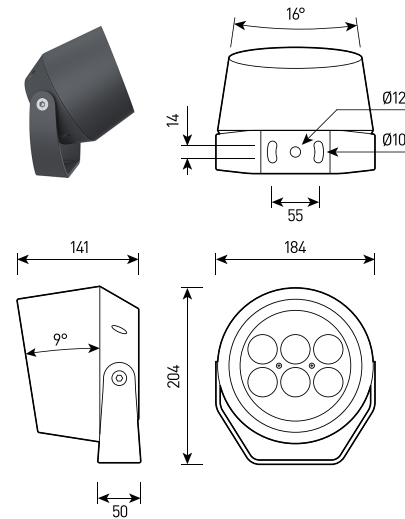


2 base

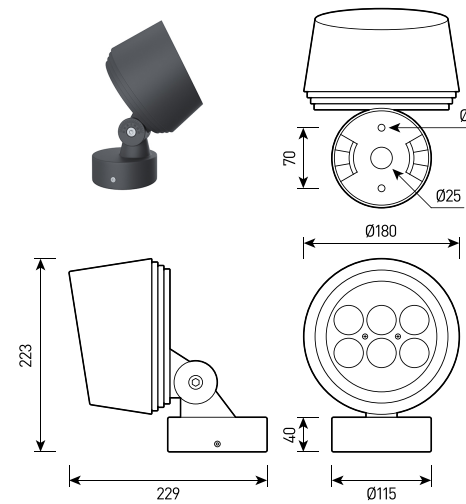


3 pipe mount

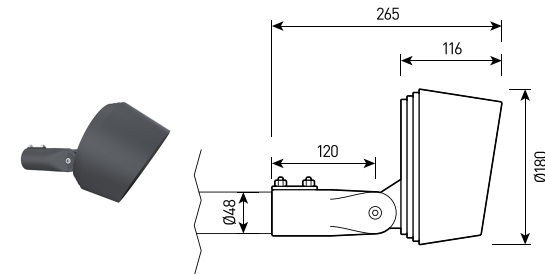


4 bracket to pipe

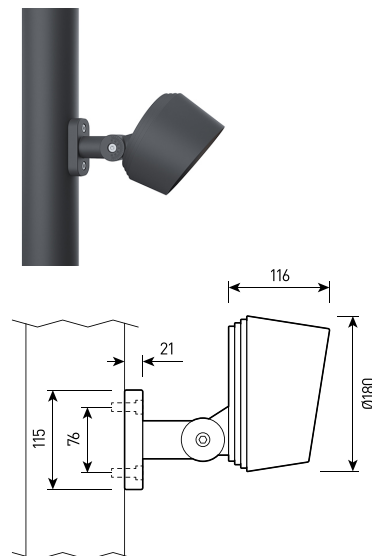

5 wrap-around bracket

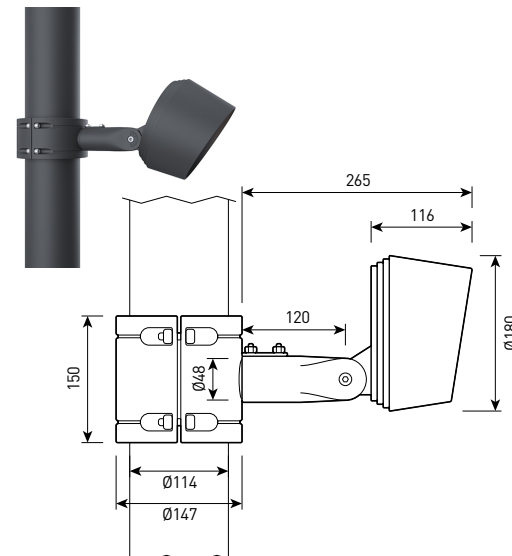

6 spike

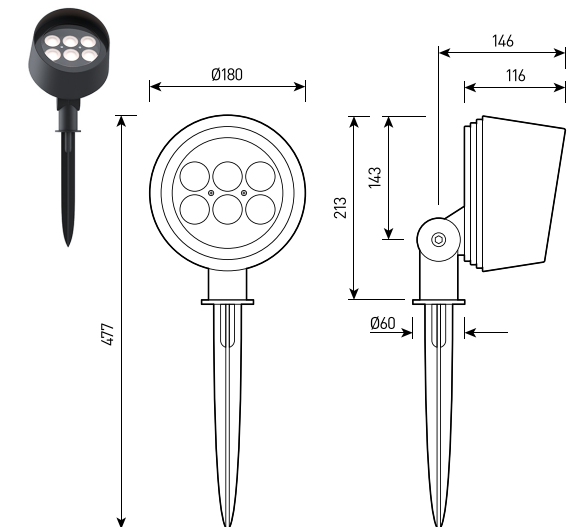

GARNET GLOW S

Multifunctional spotlight for accent lighting.

Multichip 4-in-1 RGB+W Tunable White with DMX-512 operated

Housing:	Pressure die-cast aluminum alloy with polyester powder paint
Housing color:	Black, Grey, RAL
Mounting:	Stainless steel
Beam angle:	2.6°, 3.5°, 12°, 15°, 20°, 30°, 60°, 5°×20, 10°×70, 15°×60°
Color temperature:	2700K, 3000K, 4000K, 5000K, 1800K–6000K Tunable White, RGBW
Control system:	On/Off, 1–10V, DMX-512, DALI
Input voltage:	24 V, 220 V
IES protection classes:	Class I, Class III (SELV)
Protection Rating:	IP66
Operating temperature:	–40°C ~ +50°C
Weight:	2 kg

Article	Name	Power	Dimensions, mm	Input voltage	Beam angle	Color temperature	Weight, kg
622030010	GARNET GLOW S 30W 100V-264V IP66 Single Color	30 W	184×204×141	220 V	2.6°, 3.5°, 12°, 20°, 30°, 60°, 10°×70, 5°×20	2700K, 3000K, 4000K, 5000K	2
622030015	GARNET GLOW S TW 30W DC24V IP66 DMX Tunable white 1800K - 6000K	30 W	184×204×141	24 V	2.6°, 3.5°, 12°, 20°, 30°, 60°, 10°×70, 5°×20	1800K–6000K Tunable White	2
622030020	GARNET GLOW S 30W DC24V RGBW 4in1 IP66	30 W	184×204×141	24 V	15°, 20°, 30°, 15°×60°	RGBW	2