




view


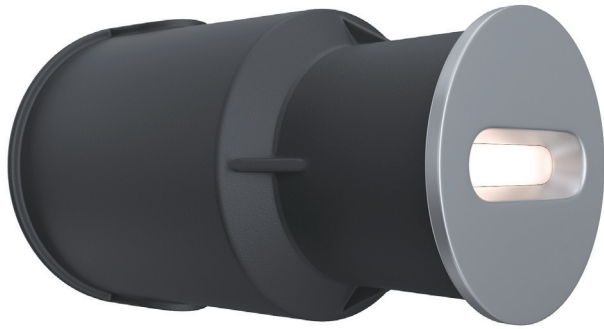


1 GILVA I

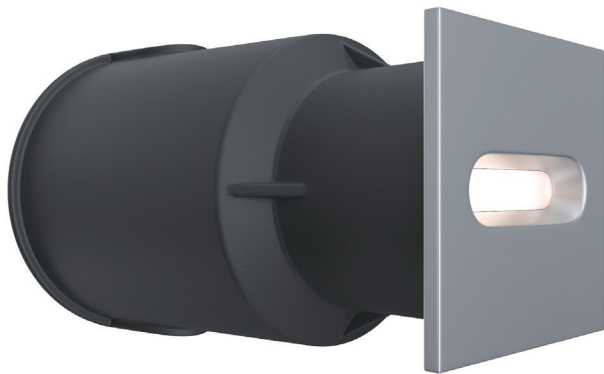

2 GILVA I QUADRO

size

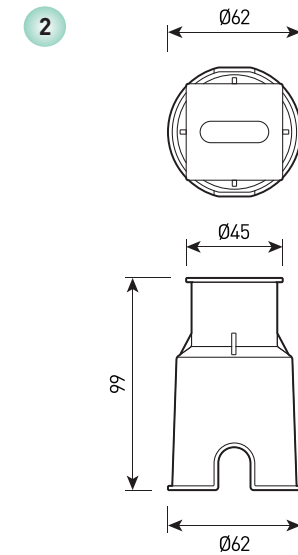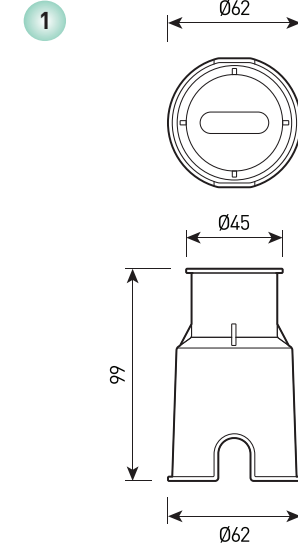




GILVA I

Recessed lighting


Housing:	Pressure die-cast aluminum with polyester powder paint
Beam angle:	120°
Housing color:	Grey
IES protection classes:	Class I (SELV)
Color temperature:	2700K, 3000K, 4000K
Input voltage:	220 V (external power supply)
Control system:	On/Off
Ingress Protection Rating, IP:	IP65
Operating temperature:	-40°C ~ +50°C
Weight:	0.25 kg

Article	Name	Power, W	Dimensions, mm	Input voltage, V	Beam angle, degrees	Color temperature, K	Weight, kg
825030344	GILVA I 3W 220V IP65 Single color	3W	D45x100	220V [external]	120°	2700K, 3000K, 4000K	0.25
825030346	GILVA I QUADRO 3W 220V IP65 Single color	3W	45x45x100	220V [external]	120°	2700K, 3000K, 4000K	0.25


view

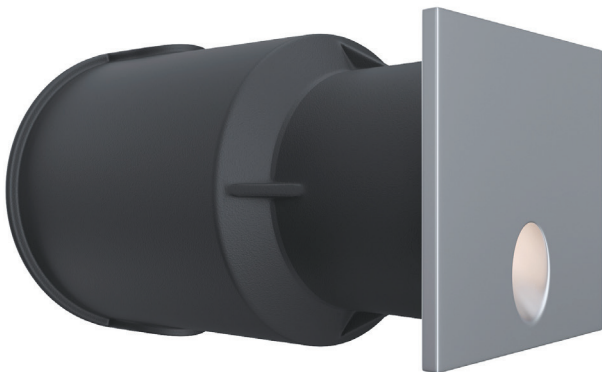

1 GILVA II




2 GILVA II QUADRO




size

1

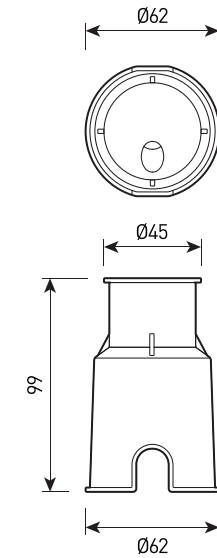

2

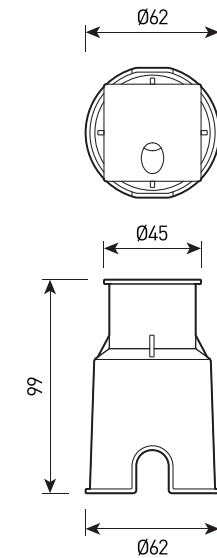





GILVA II

Recessed lighting


Housing:	Pressure die-cast aluminum with polyester powder paint
Beam angle:	120°
Housing color:	Grey
IES protection classes:	Class I (SELV)
Color temperature:	2700K, 3000K, 4000K
Input voltage:	220 V (external power supply)
Control system:	On/Off
Ingress Protection Rating, IP:	IP65
Operating temperature:	-40°C ~ +50°C
Weight:	0.25 kg

Article	Name	Power, W	Dimensions, mm	Input voltage, V	Beam angle, degrees	Color temperature, K	Weight, kg
825030348	GILVA II 3W 220V IP65 Single color	3W	D45x100	220V [external]	120°	2700K, 3000K, 4000K	0.25
825030350	GILVA II QUADRO 3W 220V IP65 Single color	3W	45x45x100	220V [external]	120°	2700K, 3000K, 4000K	0.25


view

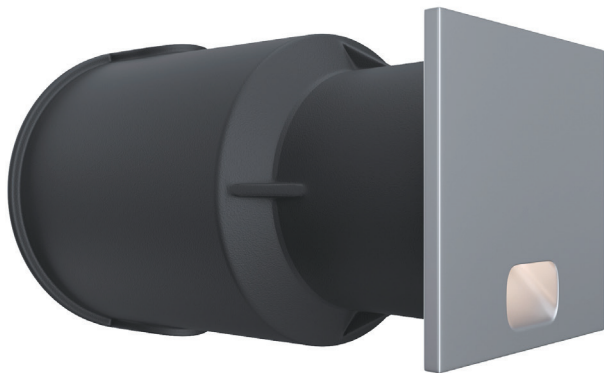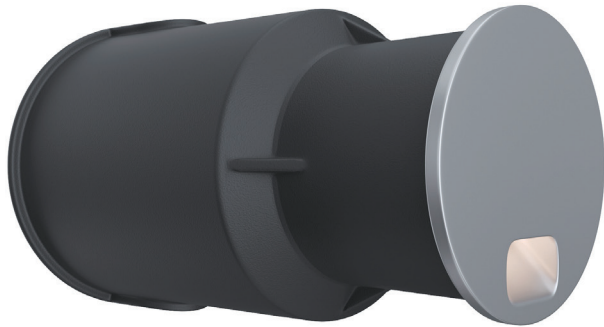

1 GILVA III




2 GILVA III QUADRO




size

1

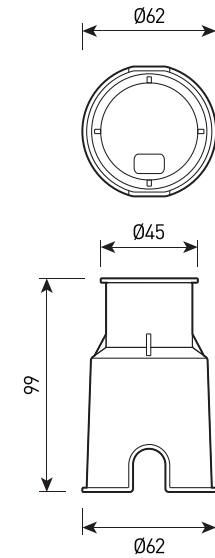

2

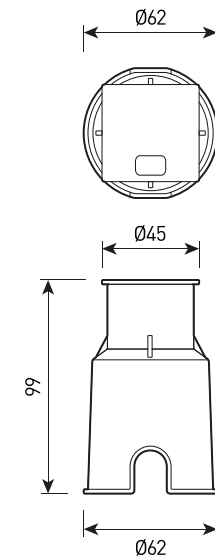





GILVA III

Recessed lighting


Housing:	Pressure die-cast aluminum with polyester powder paint
Beam angle:	120°
Housing color:	Grey
IES protection classes:	Class I (SELV)
Color temperature:	2700K, 3000K, 4000K
Input voltage:	220 V (external power supply)
Control system:	On/Off
Ingress Protection Rating, IP:	IP65
Operating temperature:	-40°C ~ +50°C
Weight:	0.25 kg

Article	Name	Power, W	Dimensions, mm	Input voltage, V	Beam angle, degrees	Color temperature, K	Weight, kg
825030352	GILVA III 3W 220V IP65 Single color	3W	D45x100	220V [external]	120°	2700K, 3000K, 4000K	0.25
825030354	GILVA III QUADRO 3W 220V IP65 Single color	3W	45x45x100	220V [external]	120°	2700K, 3000K, 4000K	0.25


view

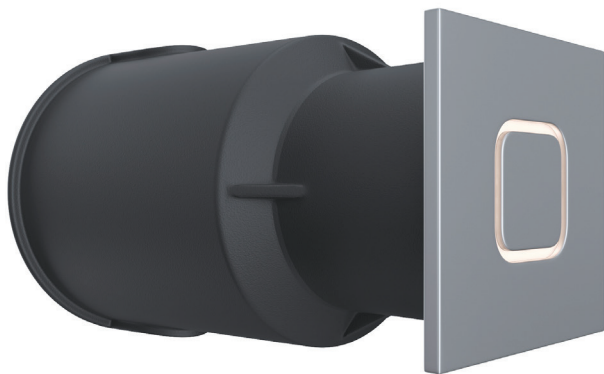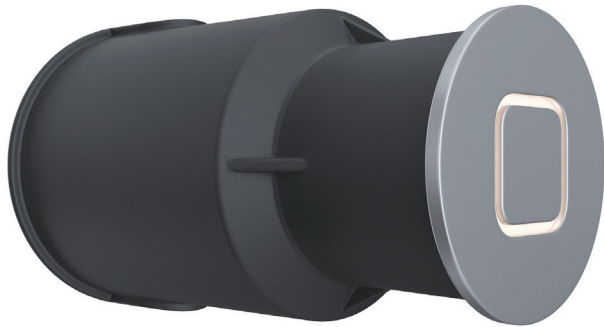

1 GILVA IV




2 GILVA IV QUADRO




size

1

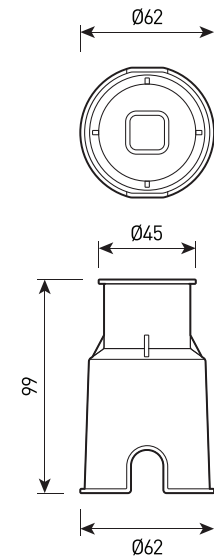

2

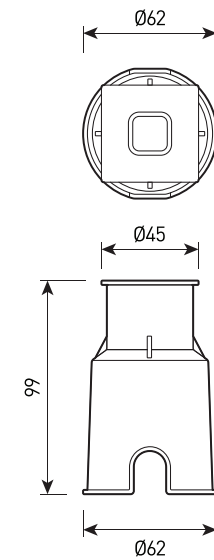


GILVA IV

Recessed lighting

Housing:	Pressure die-cast aluminum with polyester powder paint
Beam angle:	120°
Housing color:	Grey
IES protection classes:	Class I (SELV)
Color temperature:	2700K, 3000K, 4000K
Input voltage:	220 V (external power supply)
Control system:	On/Off
Ingress Protection Rating, IP:	IP65
Operating temperature:	-40°C ~ +50°C
Weight:	0.25 kg

Article	Name	Power, W	Dimensions, mm	Input voltage, V	Beam angle, degrees	Color temperature, K	Weight, kg
825030356	GILVA IV 3W 220V IP65 Single color	3W	D45x100	220V [external]	120°	2700K, 3000K, 4000K	0.25
825030358	GILVA IV QUADRO 3W 220V IP65 Single color	3W	45x45x100	220V [external]	120°	2700K, 3000K, 4000K	0.25


view

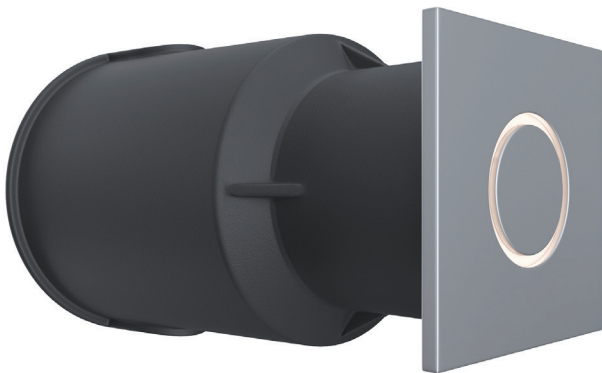

1 GILVA V




2 GILVA V QUADRO




size

1

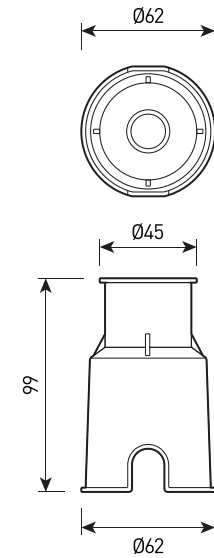

2

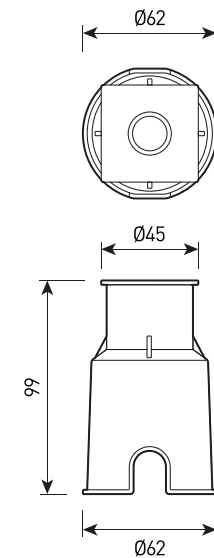


GILVA V

Recessed lighting


Housing:	Pressure die-cast aluminum with polyester powder paint
Beam angle:	120°
Housing color:	Grey
IES protection classes:	Class I (SELV)
Color temperature:	2700K, 3000K, 4000K
Input voltage:	220 V (external power supply)
Control system:	On/Off
Ingress Protection Rating, IP:	IP65
Operating temperature:	-40°C ~ +50°C
Weight:	0.25 kg

Article	Name	Power, W	Dimensions, mm	Input voltage, V	Beam angle, degrees	Color temperature, K	Weight, kg
825030360	GILVA V 3W 220V IP65 Single color	3W	D45x100	220V [external]	120°	2700K, 3000K, 4000K	0.25
825030362	GILVA V QUADRO 3W 220V IP65 Single color	3W	45x45x100	220V [external]	120°	2700K, 3000K, 4000K	0.25


view

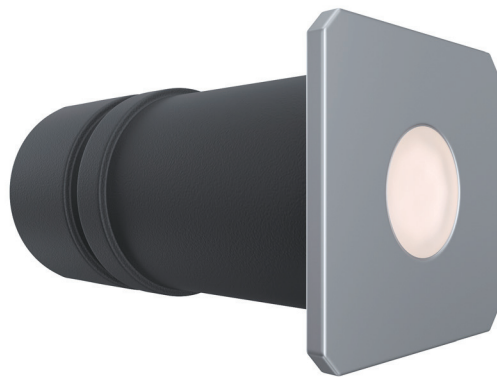

1 GILVA VI




2 GILVA VI QUADRO




size

1

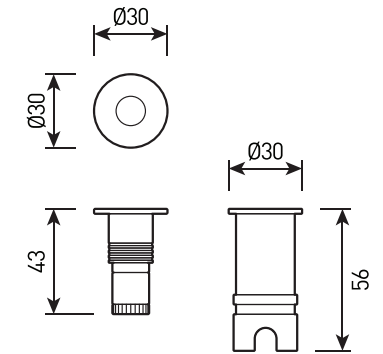

2

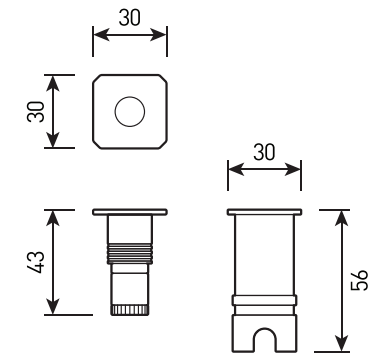

GILVA VI

Recessed lighting

Housing:	Pressure die-cast aluminum with polyester powder paint
Beam angle:	120°
Housing color:	Grey
IES protection classes:	Class I (SELV)
Color temperature:	2700K, 3000K, 4000K
Input voltage:	220 V (external power supply)
Control system:	On/Off
Ingress Protection Rating, IP:	IP65
Operating temperature:	-40°C ~ +50°C
Weight:	0.15 kg

Article	Name	Power, W	Dimensions, mm	Input voltage, V	Beam angle, degrees	Color temperature, K	Weight, kg
825030364	GILVA VI 3W 220V IP65 Single color	3W	D30x56	220V [external]	120°	2700K, 3000K, 4000K	0.15
825030366	GILVA VI QUADRO 3W 220V IP65 Single color	3W	30x30x56	220V [external]	120°	2700K, 3000K, 4000K	0.15