

GLORA 360









view



size

- 1 2W
- 2 4W
- 3 5W
- 4 7W
- 5 10W
- 6 15W

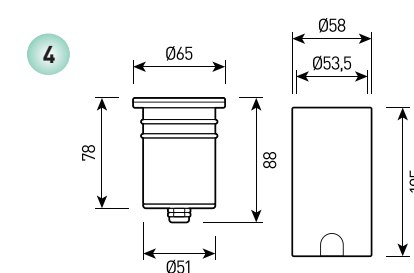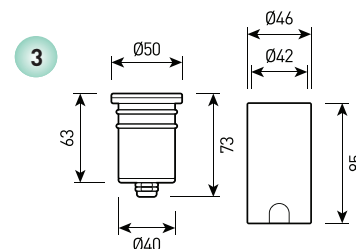

GLORA 360

In-ground luminaires with a walk-over face cover, designed for strength and integration into pedestrian surfaces.

Housing:	Die-casting aluminum
Beam angle:	360°
Housing color:	Metallic
IES protection classes:	Class I, III (SELV)
Color temperature:	2700K, 3000K, 4000K, 5000K, 6000K, 6500K
Input voltage:	12/24V, 220V
Control system:	On/Off
Ingress Protection Rating:	IP67
Operating temperature:	-40°C ~ +50°C
Weight, kg:	0.08 - 1 kg

Article	Name	Power, W	Dimensions, mm	Input voltage, V	Beam angle, degrees	Color temperature, K	Weight, kg
793002052	GLORA 360 2W 12V/24V IP67 SINGLE D32	2W	Ø32×64	12 V, 24V	360°	2700K, 3000K, 4000K, 5000K, 6000K, 6500K	0.08
793002054	GLORA 360 4W 12V/24V/220V IP67 SINGLE D42	4W	Ø42×75	12 V, 24V, 220 V	360°	2700K, 3000K, 4000K, 5000K, 6000K, 6500K	0.15
793002056	GLORA 360 5W 12V/24V/220V IP67 SINGLE D50	5W	Ø50×73	12 V, 24V, 220 V	360°	2700K, 3000K, 4000K, 5000K, 6000K, 6500K	0.25
793002058	GLORA 360 7W 12V/24V/220V IP67 SINGLE D65	7W	Ø65×88	12 V, 24V, 220 V	360°	2700K, 3000K, 4000K, 5000K, 6000K, 6500K	0.3
793002060	GLORA 360 10W 12V/24V/220V IP67 SINGLE D80	10W	Ø80×98	12 V, 24V, 220 V	360°	2700K, 3000K, 4000K, 5000K, 6000K, 6500K	0.6
793002062	GLORA 360 15W 12V/24V/220V IP67 SINGLE D100	15W	Ø100×114	12 V, 24V, 220 V	360°	2700K, 3000K, 4000K, 5000K, 6000K, 6500K	1