

GLORA

USER MANUAL



The luminaire shall be installed by a qualified electrician and wired in accordance with the latest IEE electrical regulations or the national requirements.

Installation Instructions

Technical Parameters






Product name	GLORA
Product code	793
Input Voltage	AC 220V, DC 12/24V
Power	2 - 15W
Power Factor	>0.9
Beam Angle	5°, 10°, 12°, 15°, 20°, 24°, 30°, 36°, 40°, 55°, 60°, 10°×45°, 25°×45°
Color temperature	SINGLE COLOR
Colour rendering index	>80 CRI
Working Environment	-40°C to +50°C
Dimensions	Ø32×60 mm, Ø42×75 mm, Ø50×75 mm, Ø65×90 mm, Ø80×100 mm, Ø100×116 mm
Net weight	0.08 - 1 Kg
Control Mode	On/Off

Installation Instructions



Before connecting the lamp, disconnect the power source.
Make sure that the voltage of the power source matches the operating voltage of the lamp.


1. Prepare a hole corresponding to the diameter of the mounting cup. Bring the power cable to the hole.
2. Place a sand cushion at least 20 cm thick at the bottom of the hole.
3. Install a mounting cup in the hole.
4. Connect the lamp wires to the power source wires. Use moisture-proof connectors. Make sure the connection is tight.
5. Insert the lamp into the mounting cup.

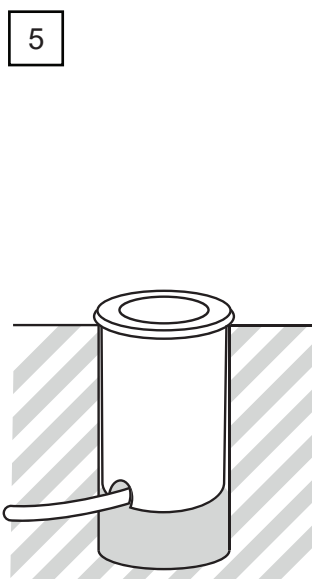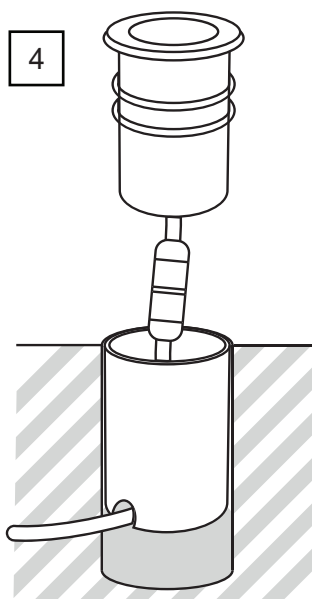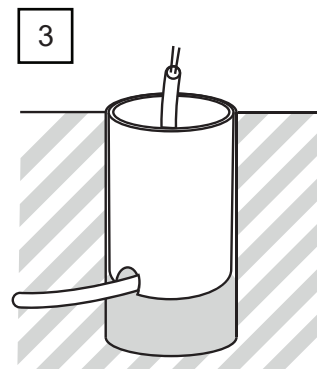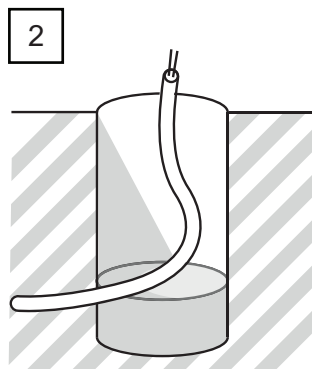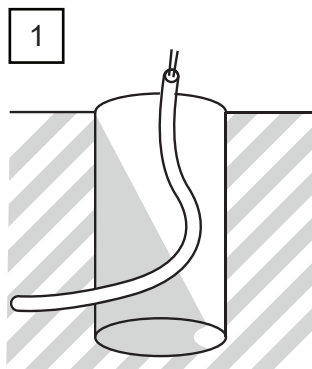


Installation Instructions

Example wiring diagram

12 B, 24 B

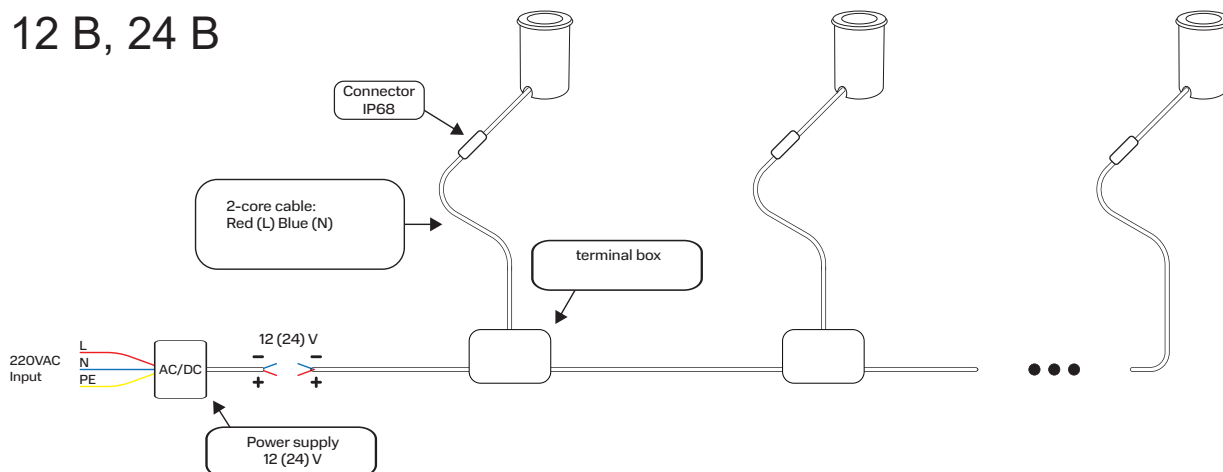


220 B

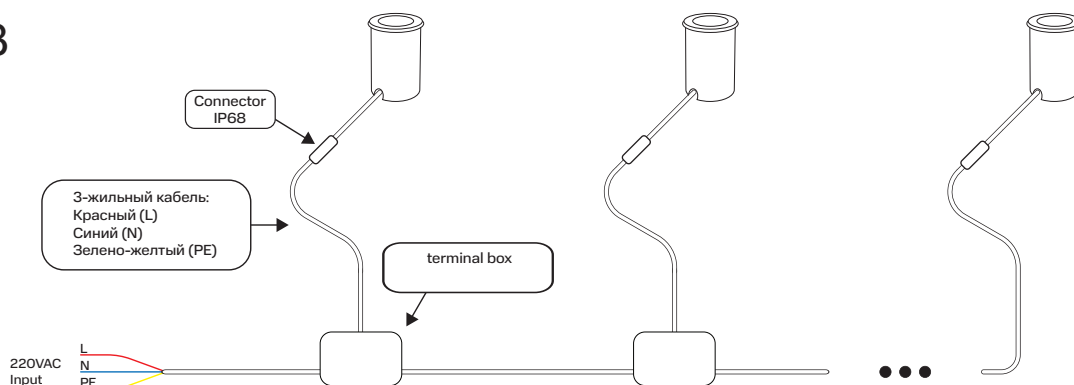


Overall dimensions

GLORA ZENITH


2W D32




4W D42




5W D50

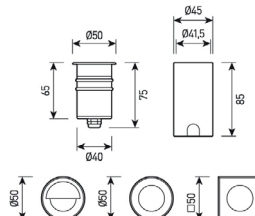


7W D65

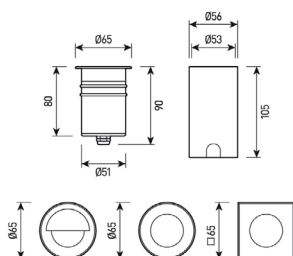

10W D80

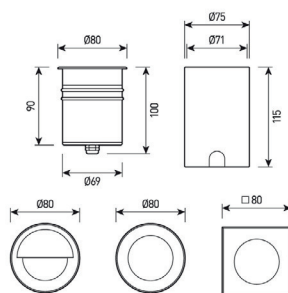


15W D100

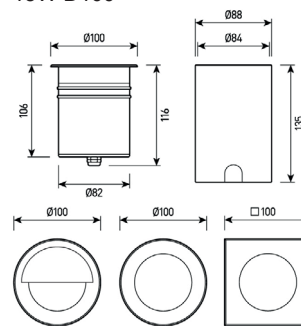


GLORA TRIMLESS


2W D32




4W D42




5W D50




7W D65



10W D80




15W D100




Overall dimensions

GLORA 360


2W D32




4W D42




5W D50




7W D65



4W D42




15W D100




GLORA RAYS


2W D32




4W D42




5W D50



7W D65



10W D80



15W D100

