

# GLOWHEAD S




## view



RAL






## 1 overall dimensions

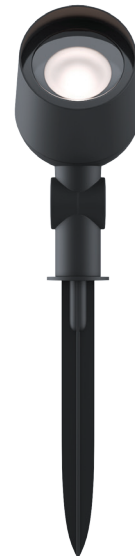

## size

### 1

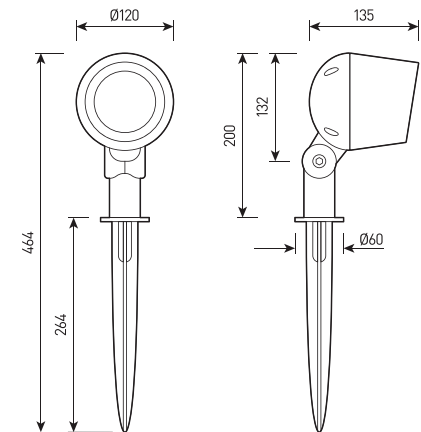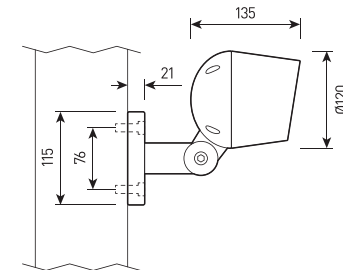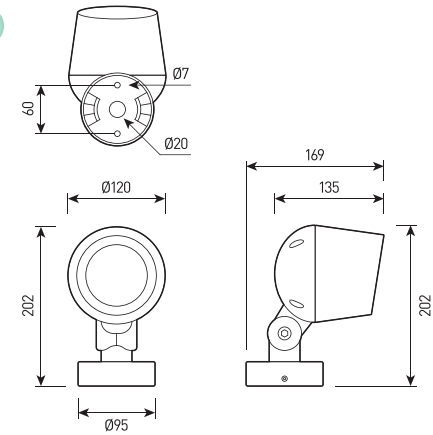

# GLOWHEAD S

Multifunctional floodlight with tiny size

<b>Housing:</b>	Pressure die-cast aluminum alloy with polyester powder paint
<b>Beam angle:</b>	2.5°, 6°, 9°, 12°, 15°, 20°, 30°, 45°, 60°, 15x60°, 10x70°, 5x20°
<b>Housing color:</b>	Black, Grey, RAL
<b>IES protection classes:</b>	Class I (SELV)
<b>Color temperature:</b>	2700K, 3000K, 4000K, 5000K, 5700K, R, G, B, RGBW 4in1
<b>Input voltage:</b>	24V, 220V
<b>Control system:</b>	On/Off, DMX-512, 0-10V, DALI
<b>Ingress Protection Rating, IP:</b>	IP66
<b>Operating temperature:</b>	-40°C ~ +50°C
<b>Weight, kg:</b>	1.2 kg

Article	Name	Power, W	Dimensions, mm	Input voltage, V	Beam angle, degrees	Color temperature, K	Weight, kg
622201154	GLOWHEAD S 20W 220V SINGLE IP66	20W	120x202x169	220V	2.5°, 6°, 12°, 20°, 30°, 45°, 60°, 10x70°, 5x20°	2700K, 3000K, 4000K, 5000K, 5700K, R, G, B	1.2
622201156	GLOWHEAD S 30W 24V/220V DMX-512 RGBW 4in1 IP66	30W	120x202x169	24V, 220V	9°, 15°, 20°, 30°, 45°, 15x60°	RGBW 4in1	1.2