


view




RAL



size

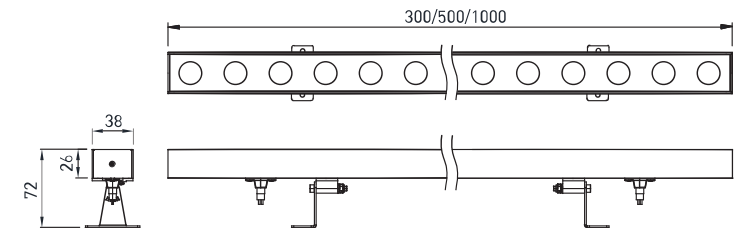



HEDGE

Wall mounted LED luminaire for architectural lighting

Housing:	Pressure die-cast aluminum alloy with polyester powder paint
Housing color:	Black, Grey, RAL
Beam angle:	15°, 20°, 30°, 45°, 60°, 18°×50°, 20°×40°, 25°×45°
Color temperature:	2700K, 3000K, 4000K, 5000K, 6000K, RGBW
Control system:	On/Off, DMX-512
Input voltage:	24 V
IES protection classes:	Class III (SELV)
Protection Rating:	IP66
Operating temperature:	−40°C ~ +50°C
Weight:	0.6 – 1 kg

Article	Name	Power	Dimensions, mm	Input voltage	Beam angle	Color temperature	Weight, kg
769190060	HEDGE 300mm 12W 24V SINGLE IP66	12 W	300×38×72	24 V	20°, 30°, 45°, 60°, 20°×40°, 18°×50°	2700K, 3000K, 4000K, 5000K, 6000K	0.6
769190062	HEDGE 300mm 12W 24V DMX-512 RGBW 4in1 IP66	12 W	300×38×72	24 V	15°, 20°, 30°, 45°, 60°, 25°×45°	RGBW	0.6
769190064	HEDGE 500mm 18W 24V SINGLE IP66	18 W	500×38×72	24 V	20°, 30°, 45°, 60°, 20°×40°, 18°×50°	2700K, 3000K, 4000K, 5000K, 6000K	0.8
769190066	HEDGE 500mm 18W 24V DMX-512 RGBW 4in1 IP66	18 W	500×38×72	24 V	15°, 20°, 30°, 45°, 60°, 25°×45°	RGBW	0.8
769190068	HEDGE 500mm 24W 24V SINGLE IP66	24 W	500×38×72	24 V	20°, 30°, 45°, 60°, 20°×40°, 18°×50°	2700K, 3000K, 4000K, 5000K, 6000K	0.8
769190070	HEDGE 500mm 24W 24V DMX-512 RGBW 4in1 IP66	24 W	500×38×72	24 V	15°, 20°, 30°, 45°, 60°, 25°×45°	RGBW	0.8
769190072	HEDGE 1000mm 36W 24V SINGLE IP66	36 W	1000×38×72	24 V	20°, 30°, 45°, 60°, 20°×40°, 18°×50°	2700K, 3000K, 4000K, 5000K, 6000K	1
769190074	HEDGE 1000mm 36W 24V DMX-512 RGBW 4in1 IP66	36 W	1000×38×72	24 V	15°, 20°, 30°, 45°, 60°, 25°×45°	RGBW	1
769190076	HEDGE 1000mm 48W 24V SINGLE IP66	48 W	1000×38×72	24 V	20°, 30°, 45°, 60°, 20°×40°, 18°×50°	2700K, 3000K, 4000K, 5000K, 6000K	1
769190078	HEDGE 1000mm 48W 24V DMX-512 RGBW 4in1 IP66	48 W	1000×38×72	24 V	15°, 20°, 30°, 45°, 60°, 25°×45°	RGBW	1