

HOVER QUADRO M



view





size



1 overall dimensions



1

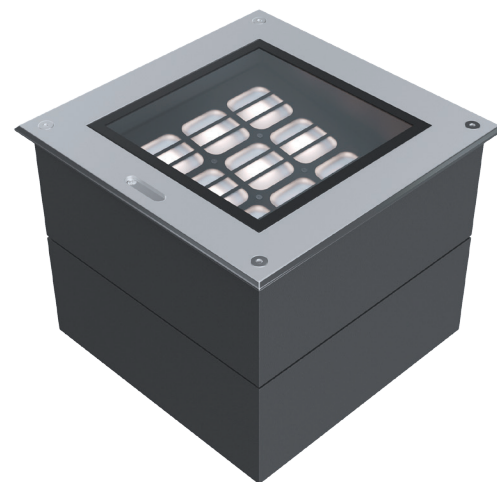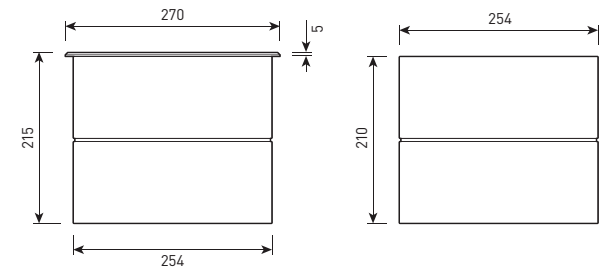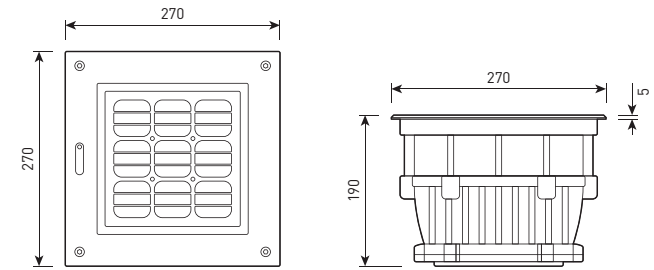

HOVER QUADRO M

Built-in ground lamp with adjustable optical part

Housing:	Pressure die-cast aluminum alloy with polyester powder paint
Beam angle:	2°, 4.5°, 8°, 12°, 20°, 30°, 45°, 60°, 10×70°, 5×20°, 15×60°
Housing color:	Metallic
IES protection classes:	Class I (SELV)
Color temperature:	2700K, 3000K, 4000K, 5000K, 6000K, R, G, B, RGBW 4in1
Input voltage:	220V
Control system:	On/Off, 0-10V, DALI, DMX-512
Ingress Protection Rating, IP:	IP67
Operating temperature:	-40°C ~ +50°C
Weight:	9.0 kg

Article	Name	Power, W	Dimensions, mm	Input voltage, V	Beam angle, degrees	Color temperature, K	Weight, kg
791200146	HOVER QUADRO M 70W 220V SINGLE IP67	70W	270x270x215	220V	2°	2700K, 3000K, 4000K, 5000K, 6000K, R, G, B	9.0
791200148	HOVER QUADRO M 80W 220V SINGLE IP67	80W	270x270x215	220V	4.5°, 8°, 12°, 20°, 30°, 45°, 60°, 10×70°, 5×20°	2700K, 3000K, 4000K, 5000K, 6000K, R, G, B	9.0
791200150	HOVER QUADRO M 90W 220V DMX RGBW 4in1 IP67	90W	270x270x215	220V	8°, 15°, 20°, 30°, 15×60°	RGBW 4 in 1	9.0