

## view




RAL



## 1 overall dimensions



## 1

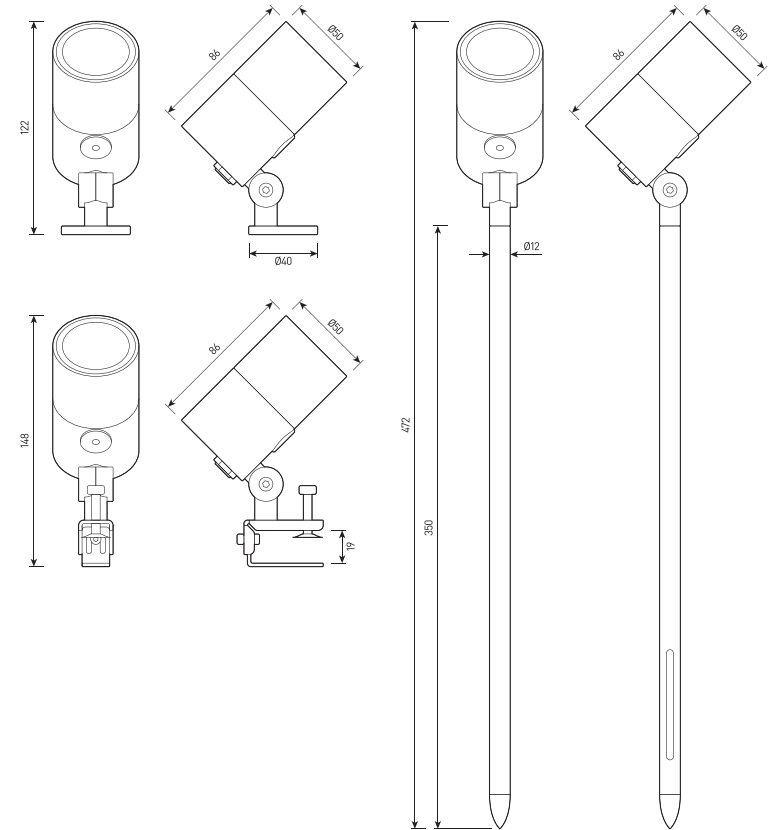

## size

# INDEX L

Multifunctional spotlight for architectural lighting

|                                       |   |
|---------------------------------------|---|
| <b>Housing:</b>                       | Pressure die-cast aluminum alloy with polyester powder paint.<br>Body and glass are fitted with silicone gaskets. |
| <b>Fasteners:</b>                     | Stainless steel   |
| <b>Beam angle:</b>                    | 2.5°, 6°, 9°, 12°, 15°, 20°, 30°, 45°, 60°, 5x20°, 10x70°, 15x60°   |
| <b>Housing color:</b>                 | Black, Grey, RAL  |
| <b>IES protection classes:</b>        | Class III (SELV)  |
| <b>Color temperature, K:</b>          | 2700K, 3000K, 4000K, 5000K, 6000K, R, G, B, RGBW  |
| <b>Input voltage, V:</b>              | 12V, 24V, 220V  |
| <b>Control system:</b>                | On/Off, DMX-512   |
| <b>Ingress Protection Rating, IP:</b> | IP66  |
| <b>Operating temperature:</b>         | -40°C ~ +50°C   |
| <b>Weight, kg:</b>                    | 0.5 kg  |

| Article   | Name                                 | Power, W | Dimensions, mm | Input voltage, V | Beam angle, degrees                              | Color temperature, K                       | Weight, kg |
|-----------|--------------------------------------|----------|----------------|------------------|--|--|------------|
| 624215116 | INDEX L 10W 12V/24V/220V SINGLE IP66 | 10W      | D50x86         | 12V/24V/220V     | 2.5°, 6°, 12°, 20°, 30°, 45°, 60°, 10x70°, 5x20° | 2700K, 3000K, 4000K, 5000K, 6000K, R, G, B | 0.5        |
| 624215118 | INDEX L 10W 12V/24V DMX512 RGBW IP66 | 10W      | D50x86         | 12V/24V          | 9°, 15°, 20°, 30°, 45°, 15x60°                   | RGBW                                       | 0.5        |