


## view



- 1 WALL
- 2 GROUND
- 3 CLIP



## size

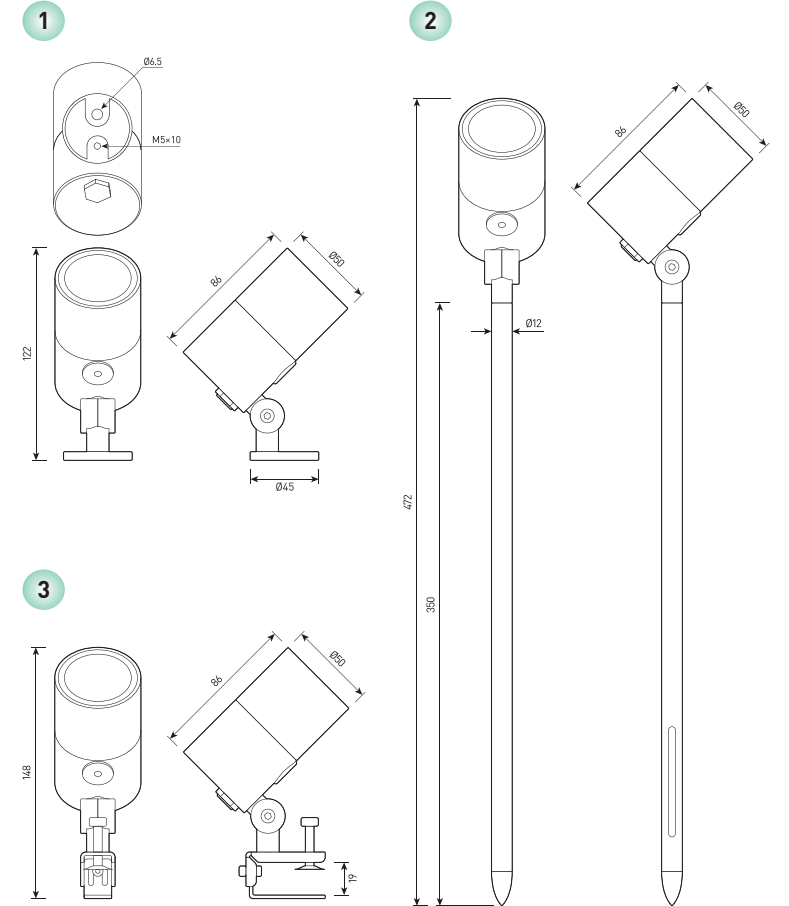

# INDEX L

Multifunctional spotlight for architectural lighting

<b>Housing:</b>	Pressure die-cast aluminum alloy with polyester powder paint. Body and glass are fitted with silicone gaskets.
<b>Fasteners:</b>	Stainless steel
<b>Beam angle:</b>	2.5°, 6°, 9°, 12°, 15°, 20°, 30°, 45°, 60°, 5x20°, 10x70°, 15x60°
<b>Housing color:</b>	Black, Grey, RAL
<b>IES protection classes:</b>	Class III (SELV)
<b>Color temperature, K:</b>	2700K, 3000K, 4000K, 5000K, 6000K, R, G, B, RGBW
<b>Input voltage, V:</b>	12V, 24V, 220V
<b>Control system:</b>	On/Off, DMX-512
<b>Ingress Protection Rating, IP:</b>	IP66
<b>Operating temperature:</b>	-40°C ~ +50°C
<b>Weight, kg:</b>	0.5 kg

Article	Name	Power, W	Dimensions, mm	Input voltage, V	Beam angle, degrees	Color temperature, K	Weight, kg
624215116	INDEX L 10W 12V/24V/220V SINGLE IP66	10W	D50x86	12V/24V/220V	2.5°, 6°, 12°, 20°, 30°, 45°, 60°, 10x70°, 5x20°	2700K, 3000K, 4000K, 5000K, 6000K, R, G, B	0.5
624215118	INDEX L 10W 12V/24V DMX512 RGBW IP66	10W	D50x86	12V/24V	9°, 15°, 20°, 30°, 45°, 15x60°	RGBW	0.5