

view




RAL



1 overall dimensions



1

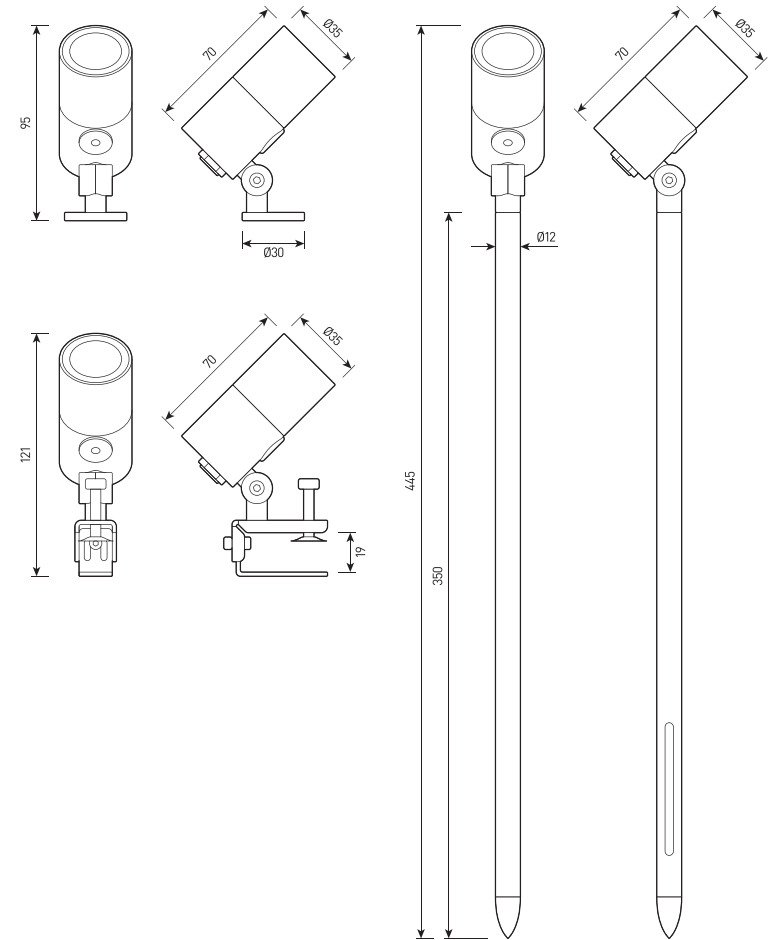

size

INDEX M

Multifunctional spotlight for architectural lighting

Housing:	Pressure die-cast aluminum alloy with polyester powder paint. Body and glass are fitted with silicone gaskets.
Fasteners:	Stainless steel
Beam angle:	6°, 12.5°, 20°, 30°, 45°, 60°, 15x30°, 15x60°, 10x60°
Housing color:	Black, Grey, RAL
IES protection classes:	Class I (SELV)
Color temperature, K:	2700K, 3000K, 4000K, 5000K, 6000K, R, G, B, RGBW
Input voltage, V:	12V, 24V, 220V
Control system:	On/Off, DMX-512
Ingress Protection Rating, IP:	IP66
Operating temperature:	-40°C ~ +50°C
Weight, kg:	0.3 kg

Article	Name	Power, W	Dimensions, mm	Input voltage, V	Beam angle, degrees	Color temperature, K	Weight, kg
624215112	INDEX M 6W 12V/24V/220V SINGLE IP66	6W	D35x70	12V/24V/220V	6°, 12.5°, 20°, 30°, 60°, 15x30°, 10x60°	2700K, 3000K, 4000K, 5000K, 6000K, R, G, B	0.3
624215114	INDEX M 6W 12V/24V DMX512 RGBW IP66	6W	D35x70	12V/24V	20°, 45°, 60°, 15x60°, 10x60°	RGBW	0.3