


INDEX QUADRO S



view

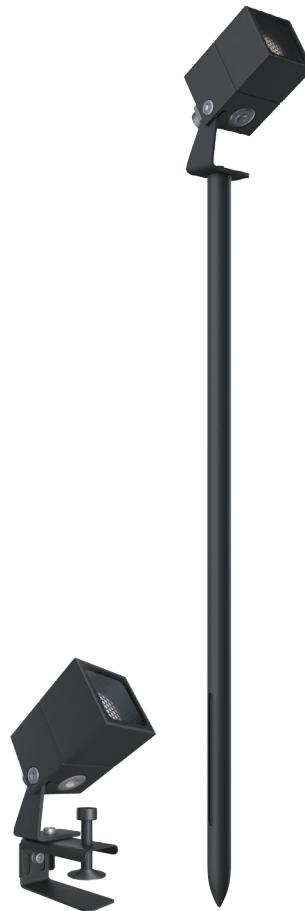


1 WALL

2 GROUND

3 CLIP

size

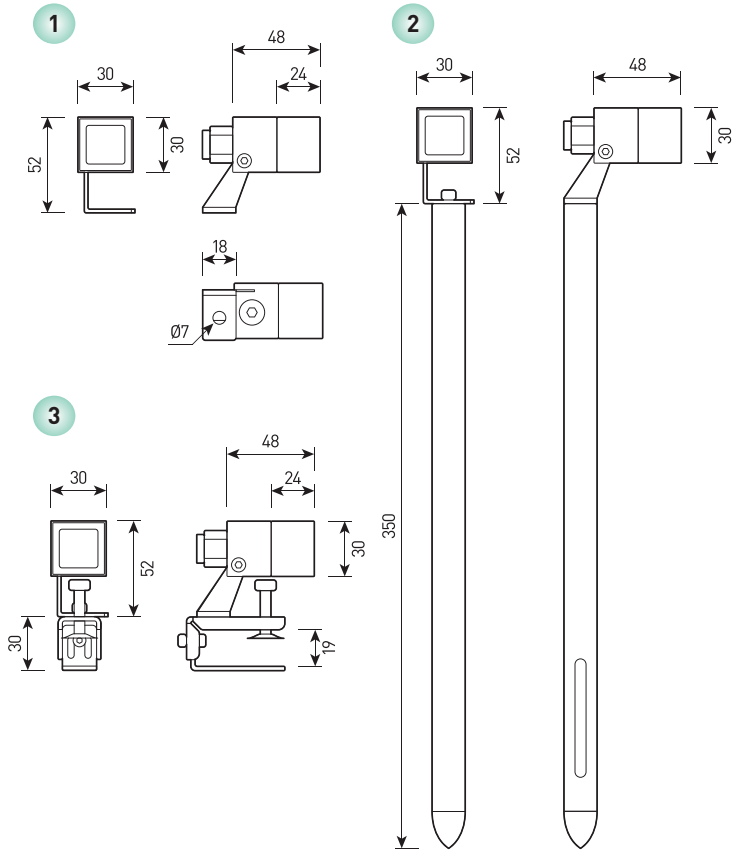

INDEX QUADRO S

Multifunctional LED spotlight for architectural lighting

Housing:	Pressure die-cast aluminum with polyester powder paint. Silicone seals in housing.
Beam angle:	20°, 30°, 45°, 60°, 25°x45°
Housing color:	Black, Grey, RAL
IES protection classes:	Class I (SELV)
Color temperature:	2700K, 3000K, 4000K, 5000K, 6000K, R, G, B, RGBW 4in1
Input voltage:	12V, 24V
Control system:	On/Off
Ingress Protection Rating, IP:	IP66
Operating temperature:	-40°C ~ +50°C
Weight:	0.3 kg

Article	Name	Power	Dimensions	Input voltage	Beam angle	Color temperature	Weight, kg
624215120	INDEX QUADRO S 3W 12V/24V SINGLE IP66	3W	30x30x48	12V/24V	20°, 30°, 45°, 60°, 25x45°	2700K, 3000K, 4000K, 5000K, 6000K, R, G, B	0.3