

view




RAL




1 overall dimensions



1

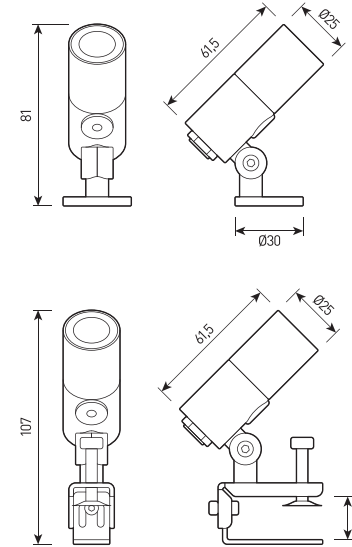

size

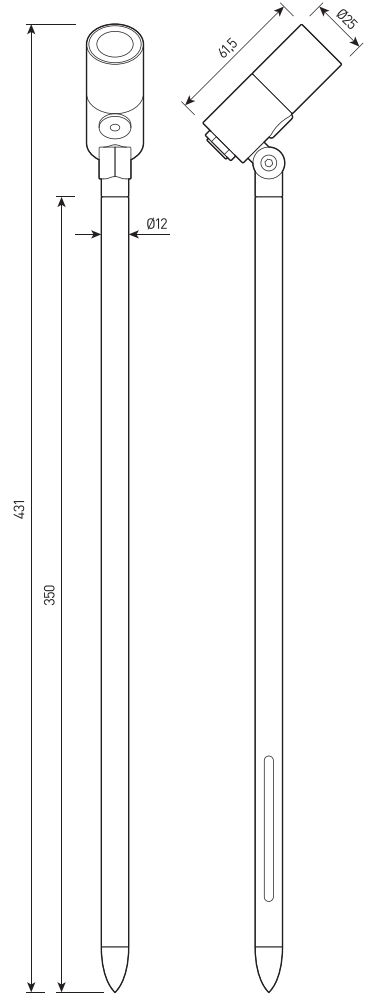

INDEX S

Multifunctional spotlight for architectural lighting

Housing:	Pressure die-cast aluminum alloy with polyester powder paint. Body and glass are fitted with silicone gaskets.
Fasteners:	Stainless steel
Beam angle:	20°, 30°, 45°, 60°, 25x45°
Housing color:	Black, Grey, RAL
IES protection classes:	Class III (SELV)
Color temperature, K:	2700K, 3000K, 4000K, 5000K, 6000K, R, G, B
Input voltage, V:	12V, 24V
Control system:	On/Off
Ingress Protection Rating, IP:	IP66
Operating temperature:	-40°C ~ +50°C
Weight, kg:	0.25 kg

Article	Name	Power, W	Dimensions, mm	Input voltage, V	Beam angle, degrees	Color temperature, K	Weight, kg
624215110	INDEX S 3W 12V/24V SINGLE IP66	3W	D25x61.5	12V/24V	20°, 30°, 45°, 60°, 25x45°	2700K, 3000K, 4000K, 5000K, 6000K, R, G, B	0.25